

Deskripsi Artikel

- Judul Jurnal : European Journal of Engineering and Technology Research (EJ-ENG)
- Volume Jurnal : Vol. 6 No. 3 (2021)
- Judul Artikel : Thermal-Hydraulic Performance Analysis by Means of Rectangular Winglet Vortex Generators in a Channel: An Experimental Study
- Penulis : **Oktarina Heriyani**, Mohammad Djaeni, Syaiful.
- Status Penulis : Kontributor
- Terindeks : Google Scholar, Crossref, WorldCat, Scilit.



VOLUME | ISSUE | YEAR
5 | 3 | 2021

European Journal of
Engineering and Technology Research


EJ-ENG

ISSN: 2506-8016



Editorial Team

<https://ej-eng.org/index.php/ejeng/about/editorialTeam>

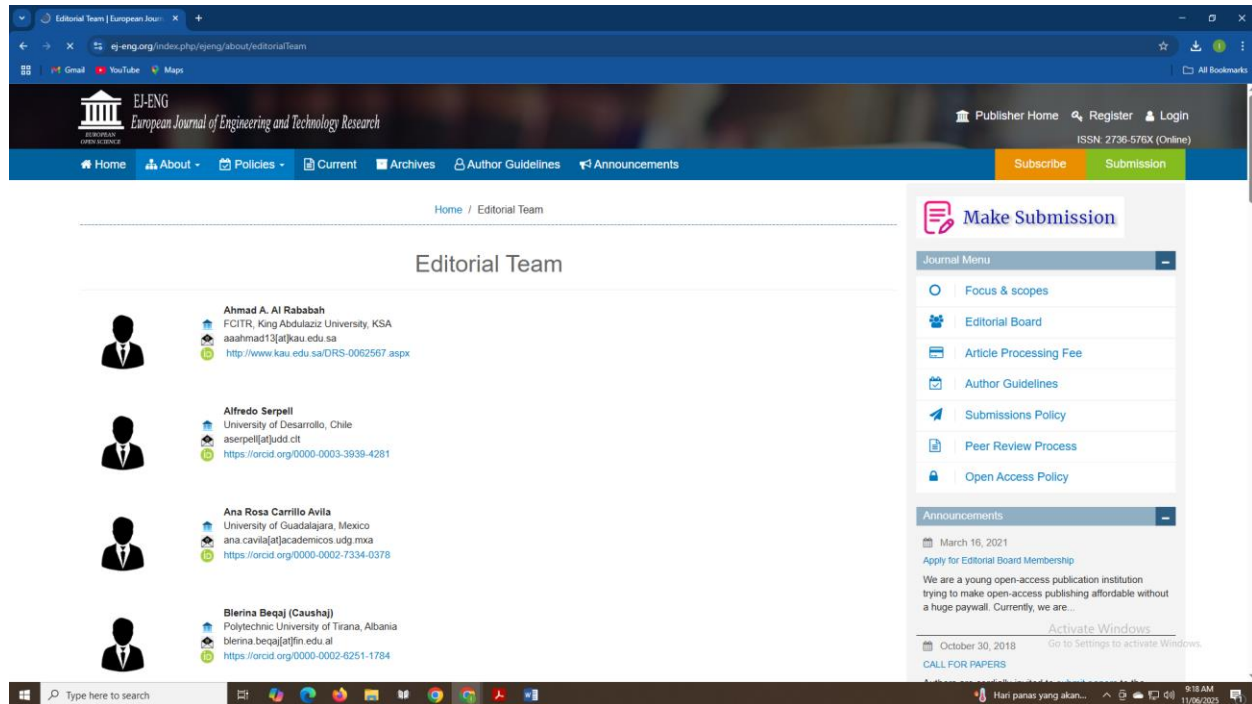

The screenshot shows the Editorial Team page of the European Journal of Engineering and Technology Research (EJ-ENG). The page features a header with the journal's logo, navigation links (Home, About, Policies, Current, Archives, Author Guidelines, Announcements), and a 'Make Submission' button. The main content area lists four editorial team members, each with a profile picture, name, affiliation, and contact information. A sidebar on the right contains a 'Journal Menu' with links to Focus & scopes, Editorial Board, Article Processing Fee, Author Guidelines, Submissions Policy, Peer Review Process, and Open Access Policy. Below the menu is an 'Announcements' section with a date of March 16, 2021, and a call to action for Editorial Board Membership. The page is displayed in a web browser window with a Windows taskbar at the bottom.

Editorial Team

- Ahmad A. Al Rababah**
FCITR, King Abdulaziz University, KSA
aaahmad13@kau.edu.sa
<http://www.kau.edu.sa/ORS-0062567.aspx>
- Alfredo Serpell**
University of Desarrolo, Chile
aserpell@judd.cl
<https://orcid.org/0000-0003-3939-4281>
- Ana Rosa Carrillo Avila**
University of Guadalajara, Mexico
ana.carrillo@academicos.udg.mx
<https://orcid.org/0000-0002-7334-0378>
- Blerina Beqaj (Caushaj)**
Polytechnic University of Tirana, Albania
blerina.beqaj@ftin.edu.al
<https://orcid.org/0000-0002-6251-1784>

Make Submission

Journal Menu

- Focus & scopes
- Editorial Board
- Article Processing Fee
- Author Guidelines
- Submissions Policy
- Peer Review Process
- Open Access Policy


Announcements

March 16, 2021
Apply for Editorial Board Membership
We are a young open-access publication institution trying to make open-access publishing affordable without a huge payroll. Currently, we are...

October 30, 2018
Go to Settings to activate Windows.
CALL FOR PAPERS

Daftar Isi

<https://ej-eng.org/index.php/ejeng/issue/view/63>

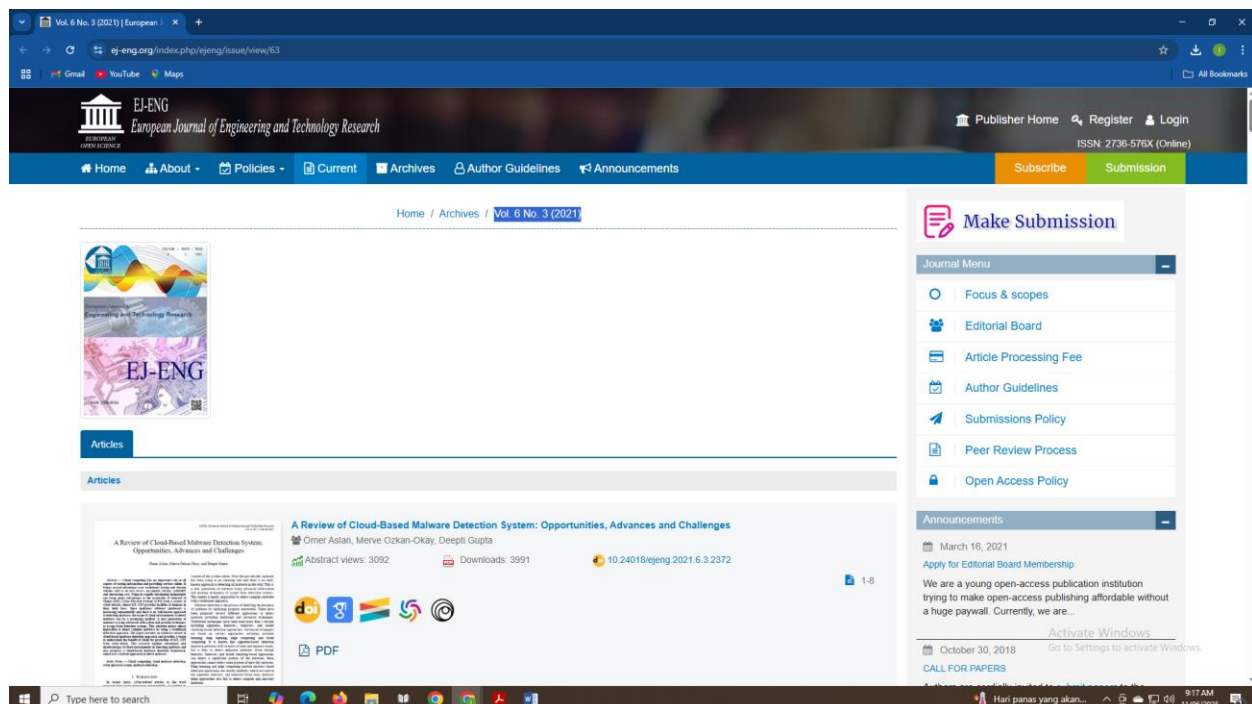

The screenshot shows the issue view page of the European Journal of Engineering and Technology Research (EJ-ENG). The page features a header with the journal's logo, navigation links (Home, About, Policies, Current, Archives, Author Guidelines, Announcements), and a 'Make Submission' button. The main content area displays the issue cover and a list of articles. A sidebar on the right contains a 'Journal Menu' with links to Focus & scopes, Editorial Board, Article Processing Fee, Author Guidelines, Submissions Policy, Peer Review Process, and Open Access Policy. Below the menu is an 'Announcements' section with a date of March 16, 2021, and a call to action for Editorial Board Membership. The page is displayed in a web browser window with a Windows taskbar at the bottom.

Home / Archives / Vol. 6 No. 3 (2021)

Articles

A Review of Cloud-Based Malware Detection System: Opportunities, Advances and Challenges
Omer Aslan, Merve Ozkan-Okay, Deepthi Gupta
Abstract views: 3092 Downloads: 3991
10.24018/ejeng.2021.6.3.2372

Make Submission

Journal Menu

- Focus & scopes
- Editorial Board
- Article Processing Fee
- Author Guidelines
- Submissions Policy
- Peer Review Process
- Open Access Policy

Announcements

March 16, 2021
Apply for Editorial Board Membership
We are a young open-access publication institution trying to make open-access publishing affordable without a huge payroll. Currently, we are...

October 30, 2018
Go to Settings to activate Windows.
CALL FOR PAPERS

Terindeks Google Scholar, Crossreff, WorldCat.

https://scholar.google.com/scholar?hl=en&as_sdt=0%2C5&q=%27Thermal-Hydraulic%20Performance%20Analysis%20by%20Means%20of%20Rectangular%20Winglet%20Vortex%20Generators%20in%20a%20Channel:%20%20An%20Experimental%20Study%27

The screenshot shows a Google Scholar search result. The search bar contains the query "Thermal-Hydraulic Performance Analysis by Means of Rectangular Winglet V". The search results list the article "Thermal-Hydraulic Performance Analysis by Means of Rectangular Winglet Vortex Generators in a Channel: An Experimental Study" by O. Hidayati, H. Djani, and S. Syarif, published in the European Journal of Engineering and Technology Research, 2021. The abstract states: "Vortex generators (VGs) are one of the effective passive models used to increase the heat transfer rate in heat exchangers. In this experiment, heat transfer from six cylinders heated to the airflow was improved by attaching rectangular winglet vortex generators (RWVGs) to a plate in a rectangular channel. The installation aimed to increase the value of the thermal-hydraulic performance evaluation criteria in the line. This experimental study was carried out by varying the fluid flow velocity from 0.4 m/s to 2 m/s with an". The article is available as a PDF from ej-eng.org. The search results also show the article is cited by 3 others and has 2 versions.

https://search.crossref.org/?q=10.24018%2Fejeng.2021.6.3.2424&from_ui=yes

The screenshot shows the Crossref Metadata Search results for the DOI 10.24018/ejeng.2021.6.3.2424. The search results show the article "Thermal-Hydraulic Performance Analysis by Means of Rectangular Winglet Vortex Generators in a Channel: An Experimental Study" published in the European Journal of Engineering and Technology Research. The authors are O. Hidayati, H. Djani, and S. Syarif. The article was published on 29 April 2021. The search results also show the article is cited by 3 others and has 2 versions. The search results also show the article is available as a PDF from ej-eng.org. The search results also show the article is available as a PDF from ej-eng.org. The search results also show the article is available as a PDF from ej-eng.org.

<https://search.worldcat.org/search?q=Thermal-Hydraulic%20Performance%20Analysis%20by%20Means%20of%20Rectangular%20Winglet%20Vortex%20Generators%20in%20a%20Channel:%20%20An%20Experimental%20Study>

The screenshot shows the WorldCat search results page. The browser address bar displays the search URL. The WorldCat logo is at the top left, and the search bar contains the query. The page shows 13 results, with the first two displayed. The first result is 'Thermal-Hydraulic Performance Analysis by Means of Rectangular Winglet Vortex Generators in a Channel: An Experimental Study' by Heriyani, Oktarina, Diansi, Mohamad, and Syaiful. The second result is 'A Quantitative Study of Non-Linear Convective Heat Transfer Model by Novel Hybrid Heuristic Driven Neural Soft Computing' by Muhammad Fawad Khan, Muhammad Sulaiman, Carlos Andres Taveira Romero, Fahad Sameer Alshammari. The left sidebar shows filters for Open Content, Format, Author/Creator, and Language. The Windows taskbar is visible at the bottom.

WorldCat®

Items Thermal-Hydraulic Performance Analysis by Means of Rectangular Winglet Vortex Generators in a Channel: An Experimental Study

Home Libraries Topics Lists About For Librarians

Jakarta, Indonesia

Showing 1-10 of 13 Results Save search Sort by: Location

Open Content

- ☐ Open Access

Format

- ☐ Article
- ☒ **Article, Chapter**
 - ☐ Article (8)
 - ☐ Chapter (5)
- ☒ **Archival Material**
 - ☐ Downloadable Archival Material (1)

Author/Creator

- ☐ Heriyani Oktarina (2)
- ☐ Ifrim Visarion Catalin (1)
- ☐ Depaiwa Nattawoot (1)
- ☐ Khan Muhammad Fawad (1)
- ☐ Lotfi Babak (1)
- ☐ Kai Shing Yang (1)

Language

Thermal-Hydraulic Performance Analysis by Means of Rectangular Winglet Vortex Generators in a Channel: An Experimental Study

Authors: Heriyani, Oktarina (Creator), Diansi, Mohamad (Creator), Syaiful, (Creator)

Summary: Vortex generators (VGs) are one of the effective passive models used to increase the heat transfer rate in heat exchangers. In this experiment, heat transfer from six

Show more

Downloadable Archival Material, English, 2021-04-29

Publisher: European Open Science Publishing, 2021-04-29

A Quantitative Study of Non-Linear Convective Heat Transfer Model by Novel Hybrid Heuristic Driven Neural Soft Computing

Authors: Muhammad Fawad Khan, Muhammad Sulaiman, Carlos Andres Taveira Romero, Fahad Sameer Alshammari

Summary: Heat transfer has a vital role in material selection, machinery efficacy, and energy consumption. The notion of heat transfer is essential in understanding many

Show more

Article, 2022

Publication: IEEE Access, 10, 2022, 34133

Publisher: 2022

Activate Windows
Go to Settings to activate Windows.

Link Jurnal

<https://www.sciencedirect.com/journal/results-in-engineering>

The screenshot shows the homepage of the 'Results in Engineering' journal. The header includes the ScienceDirect logo and navigation links like 'Journals & Books', 'Help', 'Search', 'My account', and 'Sign in'. The main banner features the journal's title, 'Open access' status, and impact factors: 5.8 CiteScore and 6.0 Impact Factor. Below the banner, there are links for 'Articles & Issues', 'About', and 'Publish'. A search bar is also present. The 'About the journal' section describes it as a gold open access journal. The 'Article publishing option' section mentions an Open Access policy with an Article Publishing Charge (APC) of USD 1,810 (excluding taxes). A timeline of the publication process is shown: 12 days for time to first decision, 61 days for review time, 74 days for submission to acceptance, and 8 days for acceptance to publication. A 'View all insights' button is also visible.

Results in Engineering
Open access

5.8 CiteScore | 6.0 Impact Factor

Articles & Issues | About | Publish | Search in this journal | Submit your article | Guide for authors

About the journal
Results in Engineering (RINENG) is a **gold open access** journal offering authors the opportunity to publish in all fundamental and interdisciplinary areas of engineering. Results in Engineering accepts papers that are **scientifically sound, technically correct and provide valuable new knowledge** to the ...
[View full aims & scope](#)

Article publishing option
Open Access
Article Publishing Charge (APC): **USD 1,810 (excluding taxes)**.
This journal is taking part in the GPOA pilot. [Review this journal's open access policy.](#)

12 days Time to first decision | 61 days Review time | 74 days Submission to acceptance | 8 days Acceptance to publication | [View all insights](#)

Activate Windows
Go to Settings to activate Windows.

Executive Editors - Biomedical Engineering and Bioengineering Applications

Link Editorial Board

<https://www.sciencedirect.com/journal/results-in-engineering/about/editorial-board>

The screenshot shows the editorial board page for 'Results in Engineering'. The header is identical to the previous page. The main content area is divided into two sections. On the left, the 'Editorial board' section features a pie chart titled 'Gender diversity of editors and editorial board members'. The chart shows 88% male, 13% female, 1% non-binary or gender diverse, and 1% prefer not to disclose. On the right, the 'Executive Editors' section lists two editors: Professor Stavros Kassinos (University of Cyprus) and Professor Suresh C. Pillai (Atlantic Technological University). Each editor's profile includes their affiliation, research interests, and a link to view their full biography. The page also includes a search bar and navigation links.

Results in Engineering
Open access

5.8 CiteScore | 6.0 Impact Factor

Articles & Issues | About | Publish | Search in this journal | Submit your article | Guide for authors

Editorial board

Gender diversity of editors and editorial board members

88% man
13% woman
1% non-binary or gender diverse
1% prefer not to disclose

Executive Editors
Biomedical Engineering and Bioengineering Applications

Professor Stavros Kassinos
University of Cyprus Department of Mechanical & Manufacturing Engineering, Lefkosia, Cyprus
computational fluid dynamics, respiratory biomechanics and physiology, drug delivery, turbulence simulation and modeling, machine learning and in-silico population studies
[View full biography](#)

Chemical & Environmental

Professor Suresh C. Pillai
Atlantic Technological University - Sligo, Sligo, Ireland
Nanotechnology, Energy Materials, Supercapacitors, Photocatalysis, Electronic Materials, Advanced Functional Materials, Engineering Materials and Ceramics
[View full biography](#)

Civil, Structural and Materials

Activate Windows
Go to Settings to activate Windows.

Link Daftar isi

<https://www.sciencedirect.com/journal/results-in-engineering/vol/16/suppl/C?page=2>

Volume 16
December 2022

Actions for selected articles
Select all / Deselect all
Download PDFs
Export citations
Show all article previews

Contents
Reviews
Regular papers
Short communication
Micro-article
Special issue on Multi-Material Printed Electronic Components and Devices Edited by Bosu Thomas, Dimitrios Lamprou, Dermot Brabazon, Sithara Greenilayam Pavlathan
Special issue on RINENG Young Investigator Award-2022: Edited by Mervana Tjallingii, Arief Hidayat, Y...

Receive an update when the latest issues in this journal are published
Sign in to set up alerts

Regular papers

- ☐ Research article • Open access
Perforated concave rectangular winglet pair vortex generators enhance the heat transfer of air flowing through heated tubes inside a channel
Oktarina Heriyani, Mohammad Djoeni, Syaiful, Aldila Kurnia Putri
Article 100705
View PDF Article preview
- ☐ Research article • Open access
Heating energy implications of utilizing gas-phase air cleaners in buildings' centralized air handling units
Behrouz Nourozi, Sture Holmberg, Christophe Duwig, Alireza Afshari, Sasan Sadrizadeh
Article 100619
View PDF Article preview
- ☐ Research article • Open access
Numerical modelling of the pot-pot by coupling of finite elements and boundary elements for acoustic characterization

Link Artikel

<https://www.sciencedirect.com/science/article/pii/S2590123022003759>

ScienceDirect

Results in Engineering
Volume 16, December 2022, 100705

Perforated concave rectangular winglet pair vortex generators enhance the heat transfer of air flowing through heated tubes inside a channel

Oktarina Heriyani^{a,*}, Mohammad Djoeni^a, Syaiful^a, Aldila Kurnia Putri^a

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.rineng.2022.100705>

Get rights and content
Under a Creative Commons license • Open access

Outline
Highlights
Abstract
Keywords
1. Introduction
2. Experimental approach
3. Results and discussion
4. Conclusion
Credit author statement
Declaration of competing interest
Acknowledgements
References
Show full outline

Cited by (14)

Figures (10)

Highlights

- Perforated vortex generators installed to increase heat transfer and reduce pressure drop through six heated tubes to the air stream.
- Perforated concave rectangular winglets compared with perforated rectangular winglet pairs vortex generator mounted on rectangular plates were investigated experimentally.
- Perforated concave rectangular winglets improve thermal

Recommended articles

- Numerical investigation towards implementation of punched winglet as...
International Journal of Heat and Mass Transfer, Volume 16, 2022, Arvind Gupta, ..., Munish Gupta
- Heat transfer and flow characteristics in a circular tube fitted with rectangular wing...
International Journal of Heat and Mass Transfer, Volume 16, 2022, Huan-ling Liu, ..., Zeng-tao Chen
- CFD analysis on the spatial effect of vortex generators in concentric tube heat...
International Journal of Thermofluids, Volume 16, 2022, Rima Aridi, ..., Mahmoud Khaled

Article Metrics

Citations

Citation Indexes 14

Captures

Mendeley Readers 26

Mentions

News Mentions 1

Thermal-Hydraulic Performance Analysis by Means of Rectangular Winglet Vortex Generators in a Channel: An Experimental Study

Oktarina Heriyani, Moh Djaeni, and Syaiful

Abstract — Vortex generators (VGs) are one of the effective passive models used to increase the heat transfer rate in heat exchangers. In this experiment, heat transfer from six cylinders heated to the airflow was improved by attaching rectangular winglet vortex generators (RWVGs) to a plate in a rectangular channel. The installation aimed to increase the value of the thermal-hydraulic performance evaluation criteria in the line. This experimental study was carried out by varying the fluid flow velocity from 0.4 m/s to 2 m/s with an interval of 0.2 m/s in the channel. Three pairs of VGs were arranged in both in-line and staggered configurations. The experimental results show that the thermal-hydraulic performance evaluation criteria for three pairs of vortex generators in the staggered configuration was 15.17% higher than the baseline, while the thermal-hydraulic performance of the in-line arrangement was 1.54% higher than the staggered one.

Index Terms — performance, thermal, rectangular winglet, vortex, in-line, staggered.

I. INTRODUCTION

The use of household and industrial air conditioning is increasing. Therefore, improving thermal-hydraulic performance of air conditioning components is of concern to researchers. The passive method (using a vortex generator) is an effective way to improve the hydraulic thermal performance of heat exchangers. Samadifar et al. studied the numerical effects of VGs on thermal hydraulic performance in plate fin heat exchangers [1] and found that using rectangular VGs on the fin plate resulted in maximum thermal-hydraulic performance. According to a study by Z. Han et al. the shapes of VGs, such as modified rectangular winglet vortex generators (RWVGs), also influence thermal-hydraulic performance [2]. H. Ling Liu et al. modified the heights of the RWVGs [3], while H. Naik et al. used modified RWVGs with concave shapes to improve thermal-hydraulic performance [4].

Concave RWVGs' surfaces, according to the findings of Y. Wang et al. give rise to longitudinal vortices [5] which impact thermal-hydraulic performance. Investigations by Liu et al. [6] concluded that this new vortex generator (VG) geometry can improve thermal-hydraulic performance. Likewise, the findings of Modi et al. show that wavy up and wavy down winglet VGs with a common flow down (CFD) configuration can improve thermal-hydraulic performance [7]. The results of a study by C. Zhai et al. showed that the

thermal-hydraulic performance of the delta winglet vortex generator (DWVG) pair with a CFD configuration is better than common flow up (CFU) [8] because the vortices formed from a pair of winglets create a downwash flow toward the wall between the vortex and the two upwash flows in the outer region of the vortex in the CFD configuration.

The optimal VG configuration for improved thermal-hydraulic performance was explored by J. Xie and Lee at a height ratio of 0.8 and a radius ratio of 1.55, with the obtained performance evaluation criterion (PEC) ranging from 1.3 to 1.5 times [9]. The increase in PEC can reach 34% based on the results of the study of A. Gupta et al. [10]. Their results were achieved using the RWVG perforated and CFU configuration at the upstream location. The thermal-hydraulic performance of the heat exchanger is also influenced by the placement and arrangement of VGs, which was demonstrated in research conducted by H. Naik et al. [11]. Their findings show that RWVG pairs in a staggered arrangement improved thermal-hydraulic performance better than those in an in-line arrangement. H. Naik et al. analyzed the thermodynamic performance of a fin tube heat exchanger arranged in-line by adding three pairs of RWVGs [12]. The results of their analysis show that the location of the RWVGs' paired arrangement affects thermal-hydraulic performance.

Given the findings discussed above, the experiments carried out in this study investigated the effects on thermal-hydraulic performance of three pairs of RWVGs arranged in-line and staggered on the plate in the channel based on the ratio of the Colburn factor (j) to the friction factor (f).

II. METHODOLOGY

This research was conducted experimentally in the thermofluid laboratory of the Department of Mechanical Engineering, Diponegoro University. This experiment used a rectangular air duct with dimensions of 370×18×8 cm. The channel was made of glass, equipped with a blower, hot wire anemometer, pitot tube, straightener, micromanometer (fluke), heater, watt meter, type K thermocouple, heating plate, data acquisition, and regulator, as shown in Fig. 1 below.

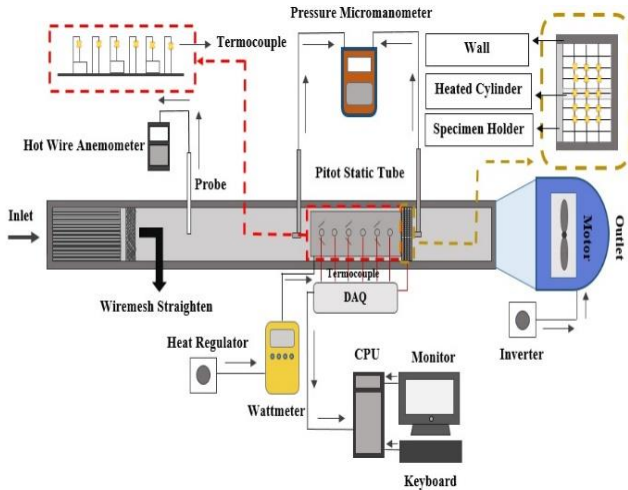


Fig. 1. Specimens of the test equipment.

Tests in this experiment varied the intake air velocity from 0.4 m/s to 2 m/s with an interval of 0.2 m/s. Then, the air flowed through six cylindrical tubes, each with a diameter of 19.05 mm and a height of 65.8 mm. Six rows of cylinders were installed in-line, each with a diameter of 19.05 mm and a length of 65.8 mm. The distance between the cylinders was 60 mm, with a fixed angle of attack of 15°. The results of Lu and Zhai's observations showed that the best thermal-hydraulic performance was at an angle of attack of 15° [6].

The RWVGs used in this experiment had dimensions of 30×30 mm. The RWVGs were mounted on aluminum plates, which were 500 mm long, 155 mm wide, and 1 mm thick. The RWVGs were installed on the plates, both in-line and staggered (Fig. 2a, b, c, and d).

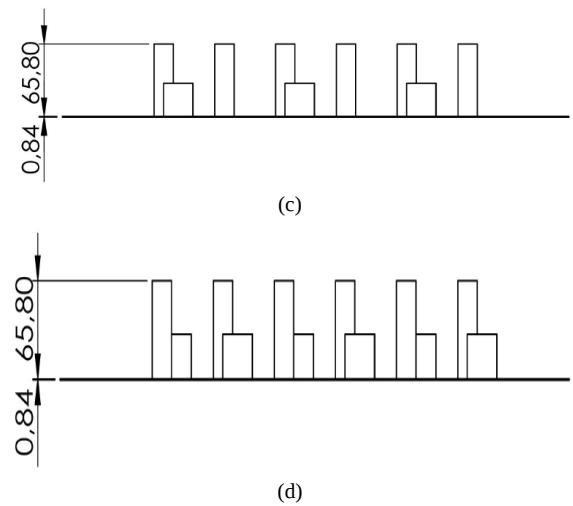
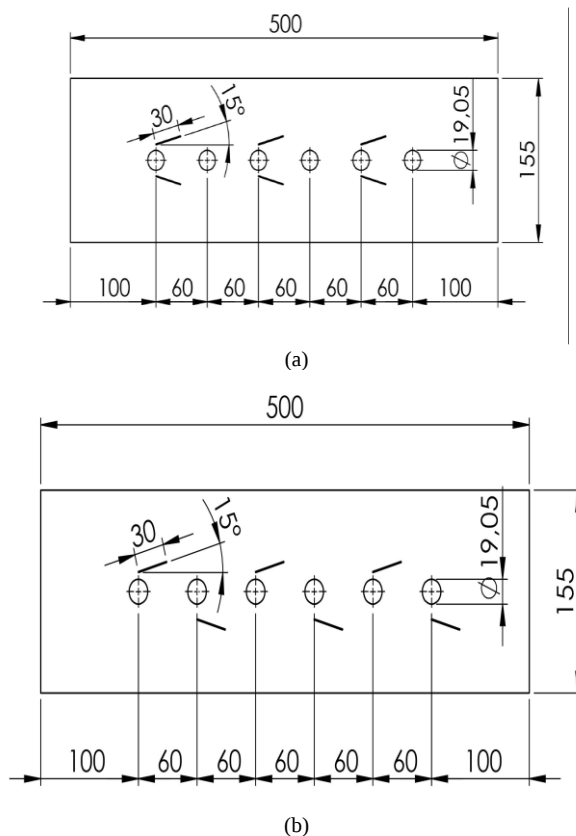


Fig. 2. Test specimens:

- (a) Top plane of RWVGs arranged in three in-line rows;
- (b) Top plane of RWVGs arranged in three staggered rows;
- (c) Side plane of RWVGs arranged in three in-line rows;
- (d) Side plane of RWVGs arranged in three in-line rows.

The data obtained from the experiment were calculated based on the ratio of the Colburn factor (j) to the friction factor (f) to obtain the thermal-hydraulic performance (PEC) with the following formulas:

$$j = \frac{Nu}{Re \cdot Pr^{\frac{1}{3}}} \quad (1)$$

where j is the Colburn factor, and

$$f = \frac{2\Delta p D_h}{\rho u_{in} L} \quad (2)$$

where f is the friction factor. Therefore,

$$PEC = \frac{\frac{j_1}{j_0}}{\left(\frac{f_1}{f_0}\right)^{\frac{1}{3}}} \quad (3)$$

III. RESULTS AND DISCUSSION

The effects of the RWVGs on thermal-hydraulic performance were studied by comparing the baseline PEC to the PEC when arranged in-line and staggered, with the addition of three pairs of RWVGs in a rectangular channel passing through six heated cylinders. The discussion of PEC is based on the JF factor, which is the ratio between the Colburn factor and the friction factor, which is formulated in (3).

Fig 3 shows the effects of the aforementioned arrangements on the Colburn factor. According to Modi et al., a decrease in the Colburn factor entails an increase in the Reynolds (Re) number [7].

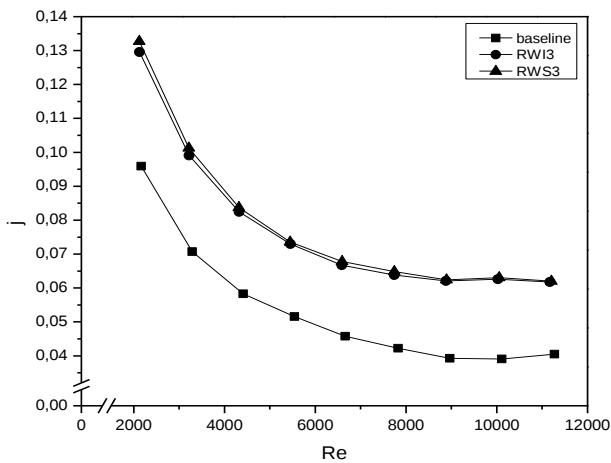


Fig. 3. Graph of j values versus Re for in-line and staggered arrangements

Fig. 3 shows a decrease in the Colburn factor (j) and an increase in the Re number in the RWVGs with in-line and staggered arrangements. The highest Colburn factor (j) value (0.13) at a low Re number was found in staggered RWVG arrangements. The lowest Colburn factor value (0.0618) was found in in-line RWVGs arrangements. This is due to the influence of the main vortices induced by the fluid flow downstream of the RWVGs. Therefore, based on experimental data, the arrangements of paired VGs' row configurations affect the resulting Colburn factor (j) values [13].

The determination of the PEC is influenced not only by the Colburn factor, but also by the friction factor (f). The friction factor decreases as the Re number increases, according to the findings of Modi et al [7]. However, a higher variation of the Re number is found to be nearly constant in their f value according to their analysis. This is due to reducing the coefficient of resistance.

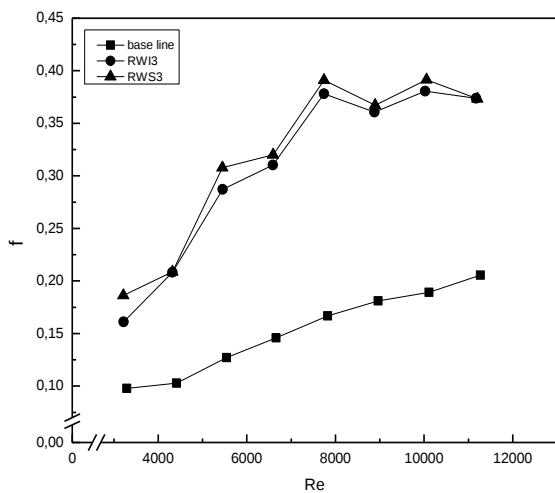


Fig. 4. Graph of f values versus Re .

Fig. 4 shows that the value of the friction factor (f) was higher in the staggered arrangement than in the in-line arrangement [14]. The highest value of friction factor (f) was in the staggered arrangements (0.392), and for the three in-line row arrangements, it was 0.381. The number of rows affects the value of the friction factor (f); the more rows there are, the greater the value of the friction factor (f) [4].

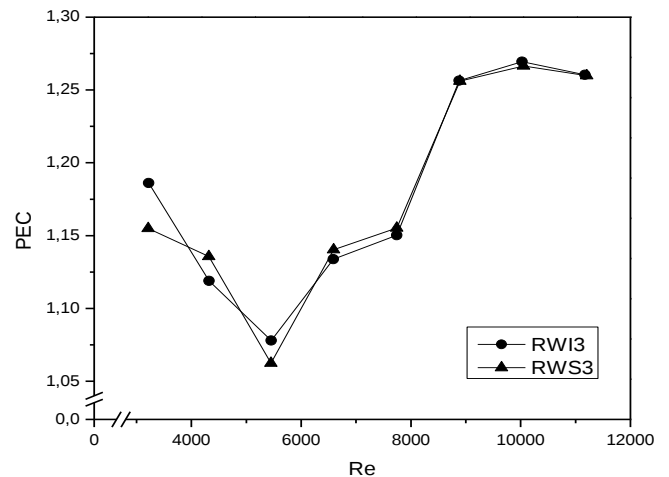


Fig. 5. Graph of PEC values versus Re .

The variation in the PEC value generated with Re , as shown in Fig 5, explains the effect of the JF factor ratio and the friction factor on the increase in the PEC value, which is in line with the increase in Re [10]. The resulting PEC values were larger in RWVGs with staggered arrangements than in those with in-line arrangements. The number of rows also affects PEC values; the more RWVG rows there are, the greater the resulting PEC value, which is caused by flow resistance [2]. The PEC as a performance evaluation scale in this experiment gave the best indication by the ratio between the number of rows of in-line and staggered installations of RWVGs. The largest PEC value (1.27) was in the staggered RWVG arrangement with three pairs.

IV. CONCLUSION

The effects of RWVGs on the performance evaluation criterion in heat exchanger tubes were determined by comparing the results of in-line and staggered arrangements. Overall performance was based on the JF factor by calculating the ratio of the Colburn factor (j_1/j_0) to the friction factor (f_1/f_0)^{1/3}. The effect of thermal characteristics and pressure drop can be seen from the JF factor obtained.

The staggered arrangement showed an increase in the PEC value proportional to the increase in the Colburn factor for the increase in Re number and inlet velocity by 15.17% compared to the baseline and 1.54% lower than the in-line arrangement with three rows. Therefore, the staggered arrangement of RWVGs and a greater number of rows increase the PEC value.

ACKNOWLEDGMENT

Thanks to the UNDIP Thermofluid Laboratory for providing a place to conduct data collection experiments and UHAMKA, which helped to finance this experiment in the research scheme.

REFERENCES

- [1] M. Samadifar and D. Toghraie, "Numerical simulation of heat transfer enhancement in a plate-fin heat exchanger using a new type of vortex generators," *Appl. Therm. Eng.*, vol. 133, no. September 2017, pp. 671–681, 2018, doi: 10.1016/j.applthermaleng.2018.01.062.
- [2] Z. Han, Z. Xu, and J. Wang, "Numerical simulation on heat transfer

- characteristics of rectangular vortex generators with a hole," *Int. J. Heat Mass Transf.*, vol. 126, pp. 993–1001, 2018, doi: 10.1016/j.ijheatmasstransfer.2018.06.081.
- [3] H. ling Liu, H. Li, Y. ling He, and Z. tao Chen, "Heat transfer and flow characteristics in a circular tube fitted with rectangular winglet vortex generators," *Int. J. Heat Mass Transf.*, vol. 126, 2018, doi: 10.1016/j.ijheatmasstransfer.2018.05.038.
- [4] H. Naik, S. Hari Krishnan, and S. Tiwari, "Numerical investigations on heat transfer characteristics of curved rectangular winglet placed in a channel," *Int. J. Therm. Sci.*, vol. 129, no. April, pp. 489–503, 2018, doi: 10.1016/j.ijthermalsci.2018.03.028.
- [5] Y. Wang, P. Liu, F. Shan, Z. Liu, and W. Liu, "Effect of longitudinal vortex generator on the heat transfer enhancement of a circular tube," *Appl. Therm. Eng.*, vol. 148, no. May 2018, pp. 1018–1028, 2019, doi: 10.1016/j.applthermaleng.2018.11.080.
- [6] G. Lu and X. Zhai, "Effects of curved vortex generators on the air-side performance of fin-and-tube heat exchangers," *Int. J. Therm. Sci.*, vol. 136, no. May 2018, pp. 509–518, 2019, doi: 10.1016/j.ijthermalsci.2018.11.009.
- [7] A. J. Modi, N. A. Kalel, and M. K. Rathod, "Thermal performance augmentation of fin-and-tube heat exchanger using rectangular winglet vortex generators having circular punched holes," *Int. J. Heat Mass Transf.*, 2020, doi: 10.1016/j.ijheatmasstransfer.2020.119724.
- [8] C. Zhai, M. D. Islam, M. M. Alam, R. Simmons, and I. Barsoum, "Parametric study of major factors affecting heat transfer enhancement in a circular tube with vortex generator pairs," *Appl. Therm. Eng.*, vol. 153, no. March, pp. 330–340, 2019, doi: 10.1016/j.applthermaleng.2019.03.018.
- [9] J. Xie and H. M. Lee, "Flow and heat transfer performances of directly printed curved-rectangular vortex generators in a compact fin-tube heat exchanger," *Appl. Therm. Eng.*, 2020, doi: 10.1016/j.applthermaleng.2020.115830.
- [10] A. Gupta, A. Roy, S. Gupta, and M. Gupta, "Numerical investigation towards implementation of punched winglet as vortex generator for performance improvement of a fin-and-tube heat exchanger," *Int. J. Heat Mass Transf.*, 2020, doi: 10.1016/j.ijheatmasstransfer.2019.119171.
- [11] N. Heman and T. Shaligram, "Thermal performance analysis of fin-tube heat exchanger with staggered tube arrangement in presence of rectangular winglet pairs," *Int. J. Therm. Sci.*, 2020.
- [12] H. Naik and S. Tiwari, "Thermodynamic performance analysis of an inline fin-tube heat exchanger in presence of rectangular winglet pairs," *Int. J. Mech. Sci.*, 2021, doi: 10.1016/j.ijmecsci.2020.106148.
- [13] W. M. Yan and P. J. Sheen, "Heat transfer and friction characteristics of fin-and-tube heat exchangers," *Int. J. Heat Mass Transf.*, 2000, doi: 10.1016/S0017-9310(99)00229-X.
- [14] Y. H. Zhang, X. Wu, L. B. Wang, K. W. Song, Y. X. Dong, and S. Liu, "Comparison of heat transfer performance of tube bank fin with mounted vortex generators to tube bank fin with punched vortex generators," *Exp. Therm. Fluid Sci.*, 2008, doi: 10.1016/j.expthermflusci.2008.07.002.



Oktarina Heriyani was born in Palembang on June 5, 1977. Her last education was Master of Engineering (M.T) majoring in Industrial Engineering and Management, Institute of Technology Bandung in 2003. Currently, She is currently studying for a Doctoral Program in Mechanical Engineering Study Program at Diponegoro University, Semarang, Indonesia.

The author is a lecturer at the Faculty of Engineering, Prof. Dr. HAMKA which is located in East Jakarta, Indonesia. Some of the author's publications in recent years include the effect of vortex generator on the approach value on forced draft type cooling tower, effect of cylinder surface roughness to the distance formation of vortex, and performance improvement of a forced draught cooling tower using a vortex generator.



Syaiful was born on March 8, 1974 in Malang. Ph.D in Mechanical and Aerospace Engineering, Gyeongsang National University, Korea, M.Eng., Mechanical Engineering, Institute Technology of Bandung, Indonesia and B.Eng., Mechanical Engineering, University of Brawijaya, Indonesia. He is a lecturer, mechanical engineering, Diponegoro University, Indonesia with the teaching area of engineering mathematics, internal combustion engine, numerical analysis, and computational fluid dynamics. His publications

include numerical analysis of heat and fluid flow characteristics of airflow inside rectangular channel with presence of perforated concave delta winglet vortex generators, effect of butanol on performance and smoke emission of direct injection diesel engine fueled by jatropa oil and diesel fuel with egr system, and thermo-hydrodynamics performance analysis of fluid flow through concave delta winglet vortex generators by numerical simulation. His research interest is in the field of development of new selective catalytic reduction devices for reducing nox and soot emissions from diesel combustors, development of renewable energy sources, thermofluid (heat transfer and fluid mechanics)



Mohamad Djaeni, born on February 7, 1971. Master of Engineering at Universiti Teknologi Malaysia, Malaysia. Doctoral system and control group at Wageningen University, Netherlands.

He is a Professor at Diponegoro University, Semarang, Indonesia. Some of his publications, air dehumidification with advance adsorptive materials for food drying: a critical assessment for future prospective, a

kinetic study on color degradation during application of dried colorant from roselle extract with foaming agent, and optimization foam mat drying of roselle (*Hibiscus sadariffa* L.) extract.

Oktarina Heriyani - Thermal-Hydraulic Performance Analysis by Means of Rectangular Winglet Vortex Generators in a Channel: An Experimental Study

by Oktarina Heriyani Uploaded By Lutfan Zulwaqar

Submission date: 05-Apr-2023 11:46AM (UTC+0700)

Submission ID: 2056331629

File name: 2021_april_29_editor_in_chief,_EJERS_2424_2.pdf (361.5K)

Word count: 2811

Character count: 14514

Thermal-Hydraulic Performance Analysis by Means of Rectangular Winglet Vortex Generators in a Channel: An Experimental Study

Oktarina Heriyani, Moh Djaeni, and Syaiful

Abstract — Vortex generators (VGs) are one of the effective passive models used to increase the heat transfer rate in heat exchangers. In this experiment, heat transfer from six cylinders heated the airflow was improved by attaching rectangular winglet vortex generators (RWVGs) to a plate in a rectangular channel. The installation aimed to increase the value of the thermal-hydraulic performance evaluation criteria in the line. This experimental study was carried out by varying the fluid flow velocity from 0.4 m/s to 2 m/s with an interval of 0.2 m/s in the channel. Three pairs of VGs were arranged in both in-line and staggered configurations. The experimental results show that the thermal-hydraulic performance evaluation criteria for three pairs of vortex generators in the staggered configuration was 15.17% higher than the baseline, while the thermal-hydraulic performance of the in-line arrangement was 1.54% higher than the staggered one.

Index Terms — performance, thermal, rectangular winglet, vortex, in-line, staggered.

I. INTRODUCTION

The use of household and industrial air conditioning is increasing. Therefore, improving thermal-hydraulic performance of air conditioning components is of concern to researchers. The passive method (using a vortex generator) is an effective way to improve the hydraulic thermal performance of heat exchangers. Samadifar et al. studied the numerical effects of VGs on thermal hydraulic performance in plate fin heat exchangers [1] and found that using rectangular VGs on the fin plate resulted in maximum thermal-hydraulic performance. According to a study by Z. Han et al. the shapes of VGs, such as modified rectangular winglet vortex generators (RWVGs), also influence thermal-hydraulic performance [2]. H. Ling Liu et al. modified the heights of the RWVGs [3], while H. Naik et al. used modified RWVGs with concave shapes to improve thermal-hydraulic performance [4].

Concave RWVGs' surfaces, according to the findings of Y. Wang et al. give rise to longitudinal vortices [5] which impact thermal-hydraulic performance. Investigations by Liu et al. [6] concluded that this new vortex generator (VG) geometry can improve thermal-hydraulic performance. Likewise, the findings of Modi et al. show that wavy up and wavy down winglet VGs with a common flow down (CFD) configuration can prove thermal-hydraulic performance [7]. The results of a study by C. Zhai et al. showed that the

thermal-hydraulic performance of the delta winglet vortex generator (DWVG) pair with a CFD configuration is better than common flow up (CFU) [8] because the vortices formed from a pair of winglets create a downwash flow toward the wall between the vortex and the two upwash flows in the outer region of the vortex in the CFD configuration.

The optimal VG configuration for improved thermal-hydraulic performance was explored by J. Xie and Lee at a height ratio of 0.8 and a radius ratio of 1.55, with the obtained performance evaluation criterion (PEC) ranging from 1.3 to 9.5 times [9]. The increase in PEC can reach 34% based on the results of the study of A. Gupta et al. [10]. Their results were achieved using the RWVG perforated and CFU configuration at the upstream location. The thermal-hydraulic performance of the heat exchanger is also influenced by the placement and arrangement of VGs, which was demonstrated in research conducted by H. Naik et al. [11]. Their findings show that RWVG pairs in a staggered arrangement improved thermal-hydraulic performance better than those in an in-line arrangement. H. Naik et al. analyzed the thermodynamic performance of a fin tube heat exchanger arranged in-line by adding three pairs of RWVGs [12]. The results of their analysis show that the location of the RWVGs' paired arrangement affects thermal-hydraulic performance.

Given the findings discussed above, the experiments carried out in this study investigated the effects on thermal-hydraulic performance of three pairs of RWVGs arranged in-line and staggered on the plate in the channel based on the ratio of the Colburn factor (j) to the friction factor (f).

II. METHODOLOGY

This research was conducted experimentally in the thermofluid laboratory of the Department of Mechanical Engineering, Diponegoro University. This experiment used a rectangular air duct with dimensions of 370×18×8 cm. The channel was made of glass, equipped with a blower, hot wire anemometer, pitot tube, straightener, micromanometer (fluke), heater, watt meter, type K thermocouple, heating plate, data acquisition, and regulator, as shown in Fig. 1 below.

Submitted on April 08, 2021.
Published on April 29, 2021.
Oktarina Heriyani
(e-mail: oktarina@uhamka.ac.id)

Moh Djaeni
(e-mail: moh.djaeni@live.undip.ac.id)
Syaiful
(e-mail: syaiful.undip2011@gmail.com).

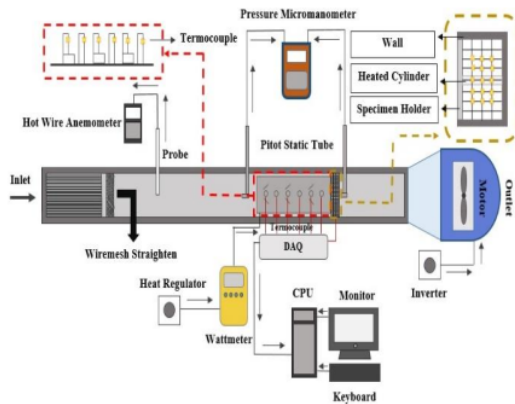


Fig. 1. Specimens of the test equipment.

Tests in this experiment varied the intake air velocity from 0.4 m/s to 2 m/s with an interval of 0.2 s. Then, the air flowed through six cylindrical tubes, each with a diameter of 19.05 mm and a height of 65.8 mm. Six rows of cylinders were installed in-line, each with a diameter of 19.05 mm and a length of 65.8 mm. The distance between the cylinders was 60 mm, with a fixed angle of attack of 15°. The results of Lu and Zhai's observations showed that the best thermal-hydraulic performance was at an angle of attack of 15° [6].

The RWVGs used in this experiment had dimensions of 30×30 mm. The RWVGs were mounted on aluminum plates, which were 500 mm long, 155 mm wide, and 1 mm thick. The RWVGs were installed on the plates, both in-line and staggered (Fig. 2a, b, c, and d).

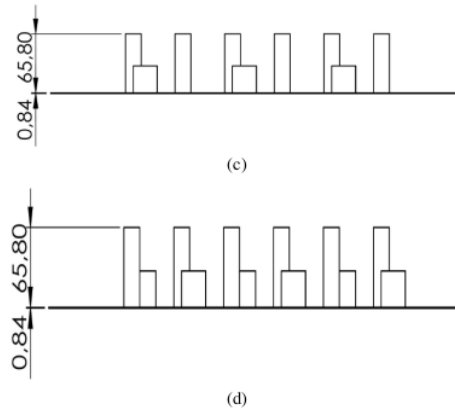
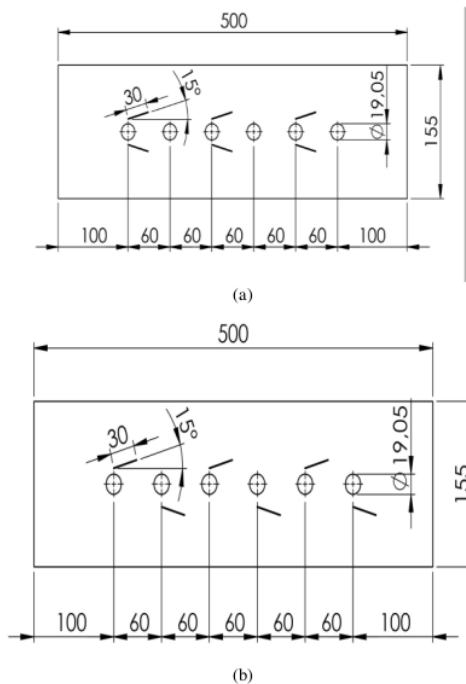


Fig. 2. Test specimens:

- (a) Top plane of RWVGs arranged in three in-line rows;
- (b) Top plane of RWVGs arranged in three staggered rows;
- (c) Side plane of RWVGs arranged in three in-line rows;
- (d) Side plane of RWVGs arranged in three in-line rows.

The data obtained from the experiment were calculated based on the ratio of the Colburn factor (j) to the friction factor (f) to obtain the thermal-hydraulic performance (PEC) with the following formulas:

$$j = \frac{Nu}{Re \cdot Pr^{1/3}} \quad (1)$$

where j is the Colburn factor, and

$$f = \frac{2\Delta p D_h}{\rho u_{in} L} \quad (2)$$

where f is the friction factor. Therefore,

$$PEC = \frac{j_1}{j_0} \frac{1}{\left(\frac{f_1}{f_0}\right)^{1/3}} \quad (3)$$

III. RESULTS AND DISCUSSION

The effects of the RWVGs on thermal-hydraulic performance were studied by comparing the baseline PEC to the PEC when arranged in-line and staggered, with the addition of three pairs of RWVGs in a rectangular channel passing through six heated cylinders. The discussion of PEC is based on the JF factor, which is the ratio between the Colburn factor and the friction factor, which is formulated in (3).

Fig. 3 shows the effects of the aforementioned arrangements on the Colburn factor. According to Modi et al., a decrease in the Colburn factor entails an increase in the Reynolds (Re) number [7].

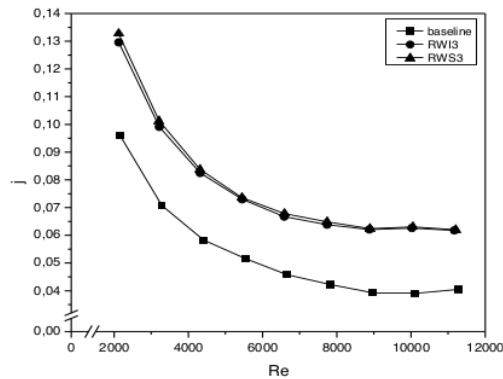


Fig. 3. Graph of j values versus Re for in-line and staggered arrangements

Fig. 3 shows a decrease in the Colburn factor (j) and an increase in the Re number in the RWGs with in-line and staggered arrangements. The highest Colburn factor (j) value (0.13) at a low Re number was found in staggered RWVG arrangements. The lowest Colburn factor value (0.0618) was found in in-line RWVGs arrangements. This is due to the influence of the main vortices induced by the fluid flow downstream of the RWVGs. Therefore, based on experimental data, the arrangements of paired VGs' row configurations affect the resulting Colburn factor (j) values [13].

The determination of the PEC is influenced not only by the Colburn factor, but also by the friction factor (f). The friction factor decreases as the Re number increases, according to the findings of Modi et al [7]. However, a higher variation of the Re number is found to be nearly constant in their f value according to their analysis. This is due to reducing the coefficient of resistance.

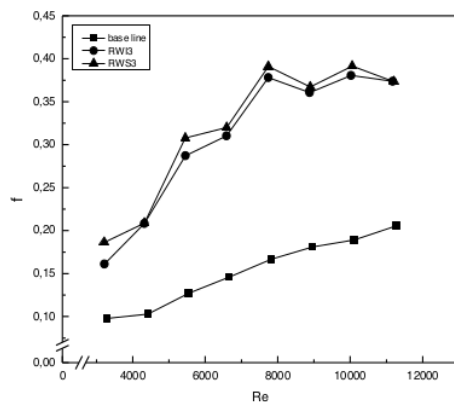


Fig. 4. Graph of f values versus Re .

Fig. 4 shows that the value of the friction factor (f) was higher in the staggered arrangement than in the in-line arrangement [14]. The highest value of friction factor (f) was in the staggered arrangements (0.392) and for the three in-line row arrangements, it was 0.381. The number of rows affects the value of the friction factor (f); the more rows there are, the greater the value of the friction factor (f) [4].

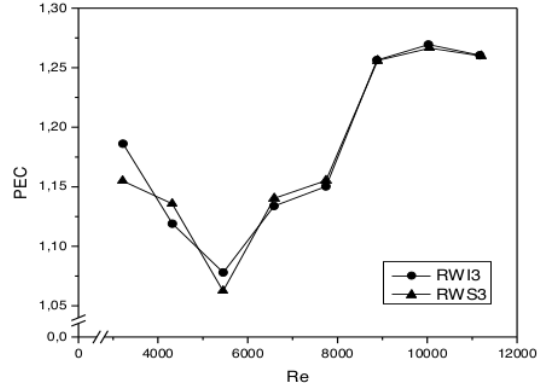


Fig. 5. Graph of PEC values versus Re .

The variation in the PEC value generated with Re , as shown in Fig 5, explains the effect of the JF factor ratio and the friction factor on the increase in the PEC value, which is in line with the increase in Re [10]. The resulting PEC values were larger in RWVGs with staggered arrangements than in those with in-line arrangements. The number of rows also affects PEC values; the more RWVG rows there are, the greater the resulting PEC value, which is caused by flow resistance [2]. The PEC as a performance evaluation scale in this experiment gave the best indication by the ratio between the number of rows of in-line and staggered installations of RWVGs. The largest PEC value (1.27) was in the staggered RWVG arrangement with three pairs.

IV. CONCLUSION

The effects of RWVGs on the performance evaluation criterion in heat exchanger tubes were determined by comparing the results of in-line and staggered arrangements. Overall performance was based on the JF factor by calculating the ratio of Colburn factor (j_1/j_0) to the friction factor (f_1/f_0)^{1/3}. The effect of thermal characteristics and pressure drop can be seen from the JF factor obtained.

The staggered arrangement showed an increase in the PEC value proportional to the increase in the Colburn factor for the increase in Re number and inlet velocity by 15.17% compared to the baseline and 1.54% lower than the in-line arrangement with three rows. Therefore, the staggered arrangement of RWVGs and a greater number of rows increase the PEC value.

ACKNOWLEDGMENT

Thanks to the UNDIP Thermofluid Laboratory for providing a place to conduct data collection experiments and UHAMKA, which helped to finance this experiment in the research scheme.

REFERENCES

- [1] M. Samadifar and D. Toghiani, "Numerical simulation of heat transfer enhancement in a plate-fin heat exchanger using a new type of vortex generators," *Appl. Therm. Eng.*, vol. 133, no. September 2017, pp. 671–681, 2018, doi: 10.1016/j.applthermaleng.2018.01.062.
- [2] Z. Han, Z. Xu, and J. Wang, "Numerical simulation on heat transfer

- characteristics of rectangular vortex generators with a hole," *Int. J. Heat Mass Transf.*, vol. 126, pp. 993–1001, 2018, doi: 10.1016/j.ijheatmasstransfer.2018.06.081.
- [3] H. ling Liu, H. Li, Y. ling He, and Z. tao Chen, "Heat transfer and flow characteristics in a circular tube fitted with rectangular winglet vortex generators," *Int. J. Heat Mass Transf.*, vol. 126, 2018, doi: 10.1016/j.ijheatmasstransfer.2018.05.038.
- [4] H. Naik, S. Harikrishnan, and S. Tiwari, "Numerical investigations on heat transfer characteristics of curved rectangular winglet placed in a channel," *Int. J. Therm. Sci.*, vol. 129, no. April, pp. 489–503, 2018, doi: 10.1016/j.jthermalsci.2018.03.028.
- [5] Y. Wang, P. Liu, F. Shan, Z. Liu, and W. Liu, "Effect of longitudinal vortex generator on the heat transfer enhancement of a circular tube," *Appl. Therm. Eng.*, vol. 148, no. May 2018, pp. 1018–1028, 2019, doi: 10.1016/j.applthermaleng.2018.11.080.
- [6] G. Lu and X. Zhai, "Effects of curved vortex generators on the air-side performance of fin-and-tube heat exchangers," *Int. J. Therm. Sci.*, vol. 136, no. May 2018, pp. 509–518, 2019, doi: 10.1016/j.jthermalsci.2018.11.009.
- [7] A. J. Modi, N. A. Kalel, and M. K. Rathod, "Thermal performance augmentation of fin-and-tube heat exchanger using rectangular winglet vortex generators having circular punched holes," *Int. J. Heat Mass Transf.*, 2020, doi: 10.1016/j.ijheatmasstransfer.2020.119724.
- [8] C. Zhai, M. D. Islam, M. M. Alam, R. Simmons, and I. Barsoum, "Parametric study of major factors affecting heat transfer enhancement in a circular tube with vortex generator pairs," *Appl. Therm. Eng.*, vol. 153, no. March, pp. 330–340, 2019, doi: 10.1016/j.applthermaleng.2019.03.018.
- [9] J. Xie and H. M. Lee, "Flow and heat transfer performances of directly printed curved-rectangular vortex generators in a compact fin-tube heat exchanger," *Appl. Therm. Eng.*, 2020, doi: 10.1016/j.applthermaleng.2020.115830.
- [10] A. Gupta, A. Roy, S. Gupta, and M. Gupta, "Numerical investigation towards implementation of punched winglet as vortex generator for performance improvement of a fin-and-tube heat exchanger," *Int. J. Heat Mass Transf.*, 2020, doi: 10.1016/j.ijheatmasstransfer.2019.119171.
- [11] N. Heman and T. Shaligram, "Thermal performance analysis of fin-tube heat exchanger with staggered tube arrangement in presence of rectangular winglet pairs," *Int. J. Therm. Sci.*, 2020.
- [12] H. Naik and S. Tiwari, "Thermodynamic performance analysis of an inline fin-tube heat exchanger in presence of rectangular winglet pairs," *Int. J. Mech. Sci.*, 2021, doi: 10.1016/j.jimecs.2020.106148.
- [13] W. M. Yan and P. J. Sheen, "Heat transfer and friction characteristics of fin-and-tube heat exchangers," *Int. J. Heat Mass Transf.*, 2000, doi: 10.1016/S0017-9310(99)00229-X.
- [14] Y. H. Zhang, X. Wu, L. B. Wang, K. W. Song, Y. X. Dong, and S. Liu, "Comparison of heat transfer performance of tube bank fin with mounted vortex generators to tube bank fin with punched vortex generators," *Exp. Therm. Fluid Sci.*, 2008, doi: 10.1016/j.expthermflusci.2008.07.002.



Oktarina Heriyani was born in Palembang on June 5, 1977. Her last education was Master of Engineering (M.T) majoring in Industrial Engineering and Management, Institute of Technology Bandung in 2003. Currently, She is currently studying for a Doctoral Program in Mechanical Engineering Study Program at Diponegoro University, Semarang, Indonesia. The author is a lecturer at the Faculty of Engineering, Prof. Dr. HAMKA which is located in East Jakarta, Indonesia. Some of the author's publications in recent years include the effect of vortex generator on the approach value on forced draft type cooling tower, effect of cylinder surface roughness to the distance formation of vortex, and performance improvement of a forced draught cooling tower using a vortex generator.



Syaiful was born on March 8, 1974 in Malang, Ph.D in Mechanical and Aerospace Engineering, Gyeongsang National University, Korea, M.Eng., Mechanical Engineering, Institute Technology of Bandung, Indonesia and B.Eng., Mechanical Engineering, University of Brawijaya, Indonesia. He is a lecturer, mechanical engineering, Diponegoro University, Indonesia with the teaching area of engineering mathematics, internal combustion engine, numerical analysis, and computational fluid dynamics. His publications include numerical analysis of heat and fluid flow characteristics of airflow inside rectangular channel with presence of perforated concave delta winglet vortex generators, effect of butanol on performance and smoke emission of direct injection diesel engine fueled by jatropha oil and diesel fuel with egr system, and thermo-hydrodynamics performance analysis of fluid flow through concave delta winglet vortex generators by numerical simulation. His research interest is in the field of development of new selective catalytic reduction devices for reducing nox and soot emissions from diesel combustors, development of renewable energy sources, thermofluid (heat transfer and fluid mechanics)



Mohamad Djaeni, born on February 7, 1971. Master of Engineering at Universiti Teknologi Malaysia, Malaysia. Doctoral system and control group at Wageningen University, Netherlands. He is a Professor at Diponegoro University, Semarang, Indonesia. Some of his publications, air dehumidification with advance adoptive materials for food drying: a critical assessment for future prospective, a kinetic study on color degradation during application of dried colorant from roselle extract with foaming agent, and optimization foam mat drying of roselle (*Hibiscus sadariffa* L.) extract.

Oktarina Heriyani - Thermal-Hydraulic Performance Analysis by Means of Rectangular Winglet Vortex Generators in a Channel: An Experimental Study

ORIGINALITY REPORT

24%
SIMILARITY INDEX

13%
INTERNET SOURCES

22%
PUBLICATIONS

2%
STUDENT PAPERS

PRIMARY SOURCES

- 1

Yafid Effendi, Amrih Prayogo, Syaiful, M. Djaeni, Eflita Yohana. "Effect of perforated concave delta winglet vortex generators on heat transfer and flow resistance through the heated tubes in the channel", Experimental Heat Transfer, 2021

Publication

2%
- 2

[link.springer.com](#)

Internet Source

2%
- 3

[www.mdpi.com](#)

Internet Source

2%
- 4

Submitted to Swinburne University of Technology

Student Paper

2%
- 5

C. Zhai, MD. Islam, M.M. Alam, R. Simmons, I. Barsoum. "Parametric study of major factors affecting heat transfer enhancement in a circular tube with vortex generator pairs", Applied Thermal Engineering, 2019

1%

6

Chidanand K. Mangrulkar, Ashwinkumar S. Dhoble, Amey R. Deshmukh, Sachin A. Mandavgane. "Numerical investigation of heat transfer and friction factor characteristics from in-line cam shaped tube bank in crossflow", Applied Thermal Engineering, 2017

Publication

7

Jinlong Xie, Hsiao Mun Lee. "Flow and heat transfer performances of directly printed curved-rectangular vortex generators in a compact fin-tube heat exchanger", Applied Thermal Engineering, 2020

Publication

8

Syaiful, Ganesha Rachmandala, Bambang Yunianto, MSK Tony Su, M. Ilham Maulana. "Heat Transfer Enhancement with Considering Pressure Loss Penalty of Airflow through Heated Plate Mounted by Perforated Concave Rectangular Winglet Vortex Generators", IOP Conference Series: Materials Science and Engineering, 2019

Publication

9

Wei He, Davood Toghraie, Amin Lotfipour, Farzad Pourfattah, Arash Karimipour, Masoud Afrand. "Effect of twisted-tape inserts and nanofluid on flow field and heat transfer

1 %

1 %

1 %

1 %

characteristics in a tube", International Communications in Heat and Mass Transfer, 2020

Publication

10

www.semanticscholar.org

Internet Source

1 %

11

KeWei Song, DongLiang Hu, Qiang Zhang, Kun Zhang, Xiang Wu, LiangBi Wang. "Thermal-hydraulic characteristic of a novel wavy fin-and-circle tube heat exchanger with concave curved vortex generators", International Journal of Heat and Mass Transfer, 2022

Publication

1 %

12

Arvind Gupta, Aditya Roy, Sachin Gupta, Munish Gupta. "Numerical investigation towards implementation of punched winglet as vortex generator for performance improvement of a fin-and-tube heat exchanger", International Journal of Heat and Mass Transfer, 2020

Publication

1 %

13

Ashish J. Modi, Manish K. Rathod. "Comparative study of heat transfer enhancement and pressure drop for fin-and-circular tube compact heat exchangers with sinusoidal wavy and elliptical curved rectangular winglet vortex generator",

1 %

International Journal of Heat and Mass Transfer, 2019

Publication

14

Oktarina Heriyani, Dan Mugisidi, P H Gunawan, Dwi Apriliana Putri. "The effect of vortex generator on the approach value on forced draft type cooling tower", IOP Conference Series: Materials Science and Engineering, 2020

Publication

1 %

15

api.intechopen.com

Internet Source

1 %

16

Ibrahim, T.A.. "Thermal performance criteria of elliptic tube bundle in crossflow", International Journal of Thermal Sciences, 200911

Publication

<1 %

17

publications.iitm.ac.in

Internet Source

<1 %

18

Ahmet Ümit Tepe, Harun Yilmaz. "Thermal-hydraulic performance of the circular-slice-shaped-winglet for tube bank heat exchanger", International Journal of Thermal Sciences, 2022

Publication

<1 %

19

Chien-Nan Lin, Jiin-Yuh Jang. "Conjugate Heat Transfer and Fluid Flow Analysis in Fin-Tube

<1 %

Heat Exchangers with Wave-Type Vortex Generators", Journal of Enhanced Heat Transfer, 2002

Publication

20

Jiaxin Liu, Lingqin Meng, Yadong Liu, Enver Doruk Özdemir, Mehmet Haluk Aksel. "Signal-to-noise ratio analysis on saw-tooth vortex generator in vehicle radiators", Transactions of the Canadian Society for Mechanical Engineering, 2022

Publication

<1 %

21

Seyed Mahdi Seyed Mousavi, Seyed Mahmoud Abolhasan Alavi. "Experimental and numerical study to optimize flow and heat transfer of airfoil-shaped turbulators in a double-pipe heat exchanger", Applied Thermal Engineering, 2022

Publication

<1 %

22

iieta.org
Internet Source

<1 %

23

tsl.energy.hust.edu.cn
Internet Source

<1 %

24

www.ijitee.org
Internet Source

<1 %

25

Ashish J. Modi, Navnath A. Kalel, Manish K. Rathod. "Thermal performance augmentation of fin-and-tube heat exchanger using

<1 %

rectangular winglet vortex generators having circular punched holes", International Journal of Heat and Mass Transfer, 2020

Publication

26

Babak Lotfi, Min Zeng, Bengt Sundén, Qiuwang Wang. "3D numerical investigation of flow and heat transfer characteristics in smooth wavy fin-and-elliptical tube heat exchangers using new type vortex generators", Energy, 2014

Publication

27

G. Liang, M.D. Islam, N. Kharoua, R. Simmons. "Numerical study of heat transfer and flow behavior in a circular tube fitted with varying arrays of winglet vortex generators", International Journal of Thermal Sciences, 2018

Publication

28

Josip Batista, Anica Trp, Kristian Lenic. "Heat Transfer Enhancement of Crossflow Air-to-Water Fin-and-Tube Heat Exchanger by Using Delta-Winglet Type Vortex Generators", Energies, 2022

Publication

29

Mazen Abdel-Salam, Adel Ahmed, Hamdy Ziedan, Khairy Sayed, Mahmoud Amery, Mohamed Swify. "A solar-wind hybrid power system for irrigation in Toshka area", 2011

<1 %

<1 %

<1 %

<1 %

30

Muhammad Awais, Arafat A. Bhuiyan. "Heat and mass transfer for compact heat exchanger (CHXs) design: A state-of-the-art review", International Journal of Heat and Mass Transfer, 2018

Publication

31

A. Y. Adam, A. N. Oumer, G. Najafi, M. Ishak, M. Firdaus, T. B. Aklilu. "State of the art on flow and heat transfer performance of compact fin-and-tube heat exchangers", Journal of Thermal Analysis and Calorimetry, 2019

Publication

32

Muhammad Awais, Arafat A. Bhuiyan. "Heat transfer enhancement using different types of vortex generators (VGs): A review on experimental and numerical activities", Thermal Science and Engineering Progress, 2018

Publication

33

Syaiful, Tri Wahyuni, Bambang Yuniarto, Nazaruddin Sinaga. "Evaluation of Vortex Generators in the Heat Transfer Improvement

<1 %

<1 %

<1 %

<1 %

of Airflow through an In-Line Heated Tube Arrangement", Fluids, 2021

Publication

Exclude quotes Off

Exclude matches Off

Exclude bibliography On