

Dan Mugisidi - Development of the Dethridge Wheel Blade Shape for Hydropower Generation in Irrigation Canals in Indonesia

by Dan Mugisidi Uploaded By Lutfan Zulwaqar


Submission date: 21-Oct-2022 01:06PM (UTC+0700)

Submission ID: 1931318582

File name: l_blade_shape_for_hydropower_generation_in_irrigation_canals.pdf (818.97K)

Word count: 4178

Character count: 21669



Development of the Dethridge Wheel Blade Shape for Hydropower Generation in Irrigation Canals in Indonesia

Dan Mugisidi^{1,*}, Irfan Nur Fauzi¹, Oktarina Heriyani¹, Yusuf Djeli¹, Erwin Aidhilhan¹, Pancatavta Hesti Gunawan¹

¹ Mechanical Engineering, Faculty of Engineering, Universitas Muhammadiyah Prof. Dr. HAMKA, Indonesia

ARTICLE INFO

Article history:

Received 4 April 2022
Received in revised form 12 July 2022
Accepted 23 July 2022
Available online 16 August 2022

Keywords:

Dethridge wheel; waterwheel; wheel blade; hydropower; pico hydro; irrigation

ABSTRACT

Consumption of electrical energy continues to increase along with population growth. As a result, various sources of electrical energy are utilised to meet these needs, especially in areas that have not been reached by the national electricity network. In countries with hilly geography, irrigation canals, pico hydro energy is often considered an alternative. One of the tools used to convert water flow energy into electrical energy is the Dethridge wheel. The Dethridge wheel is a simple waterwheel that is easy to manufacture and suitable for irrigation canals with very low water head heights. This study aims to increase the performance of the Dethridge wheel by changing the shape of the wheel blades and examine the effect of the variation of water flow rate in the channel. Experimental and numerical methods were used to investigate the potential of the developed wheel. The Dethridge wheel and its development were tested using artificial irrigation canal with flow rates of 20, 30, 60, 90 and 120 m³/h. Furthermore, a three-dimensional numerical model of the Dethridge wheel was simulated using Ansys Fluent 18.2 software. The highest efficiency of the experimental Dethridge wheel, 55.6%, was achieved when the flow rate was 30 m³/h. The developed Dethridge wheel efficiency increased to 71.72%. These results are also in agreement with the simulated model.

1. Introduction

The global use of electrical energy continues to increase due to general population growth. In 2012, electricity consumption increased by 1.8% from the previous year, and in 2018, it jumped by 4% from 2017 [1]. Until now, the largest source of electrical energy has come from fossil fuels, at 57.1% of electricity generation, followed by nuclear at 18%, and then hydropower at 13.2% though its utilization is the largest compared to other renewable energy sources [2]. In Indonesia, the target of renewable energy application is 23% by 2025 especially in off-grid areas [3]. In areas with limited access to the national electricity grid, electrical energy generated from micro hydro helps the development of local areas, contributes to improving community welfare and bolsters environmental conservation [4,5]. Furthermore, the availability of power would enhance the growth of industries

⁵ Corresponding author.

E-mail address: dan.mugisidi@uhamka.ac.id

<https://doi.org/10.37934/arfmts.98.2.146156>

and activities in the service sector and increase its competitiveness [6,7]. However, the utilisation of renewable energy from water energy is not simple, as it is dependent on the weather and geographical conditions [8,9].

If they can be utilised, irrigation canals are a potential source of renewable energy that can provide up to 1.5–2 kW/Ha [10,11]. However, hydropower plants must be able to operate efficiently and not obstruct the environment [12]. An efficient, reliable and cost-effective option is pico hydro, which produces less than 5 kW of power and can be operated at locations with low water head heights [13,14]. Pico hydro may be more effective to generate power than diesel engines, wind generators and solar cells [15]. The application of pico hydro is suitable for off-grid electricity in Indonesian rural areas even when utilising low heads [16].

For heads less than 5 m, an axial pump can be employed as a generator with a flow rate of 50 to 1000 m^3/s [17]. Meanwhile, for lower heads, waterwheels are a cost-effective choice as long as the ratio between the radius of the wheel and the submerged radius is at least 0.5 [18]. The Zuppinger mill has an efficiency of up to 75% [19] for a 1 m head, which is reduced to 60% for a 0.5 m head [20]. Even at heads between 0.2 and 1 m, hydrostatic pressure mills can still be used [21]. Meanwhile, Paudel has used the Dethridge mill to generate electrical energy from irrigation flow and has also investigated the optimal wheel size–canal geometry ratio [22,23].

The Dethridge wheel is a waterwheel that is simple and easy to make; it can be made with simple equipment and materials. These mills are suitable for driving generators in irrigation canals with very low heads, although they were initially used as water flow meters. Furthermore, studies have shown that the Dethridge wheel has a weakness due to the shape of the blades, because the force of the water decreases when the blade starts to spin up [24]. However, few improvements have been proposed for the Dethridge wheel blade shape to increase its efficiency. Therefore, this study aims to develop the Dethridge wheel by changing the shape of the blades.

2. Methodology

2.1 Experimental Setup

This study used an irrigation canal made of transparent plastic with a length of 20 m in accordance with the standard of quaternary irrigation canals in Indonesia [25]. The waterwheel was placed 10 m from the inlet to allow the water flow to become subcritical. To focus the water impulse, the width of the canal was reduced such that the distance between the canal wall and the wheel was only 7 mm on each side, as shown in Figure 1.



Fig. 1. Dethridge wheel experimental rig installation

The tools used in this study are listed in Table 1.

Table 1

Measuring tools used	
Measuring Instrument	Type
Rotameter	0–150 [m ³ /h]
Tachometer	KW06-563
Torque meter	Lutron TQ-8800
Flow Velocity meter	Flowatch FL-03

This research compares two systems: the Dethridge wheel (DW) adapted from Paudel and Saenger [22] and a developed Dethridge wheel (dDW) with a different blade shape. The two waterwheels used the same blade material: steel plates with a thickness of 1.8 mm. The two wheels have hub radii of 300 mm and width of 250 mm. The hub covers are made using wood materials. The dimensions of the DW and dDW can be seen in Figure 2 and Figure 3, respectively.

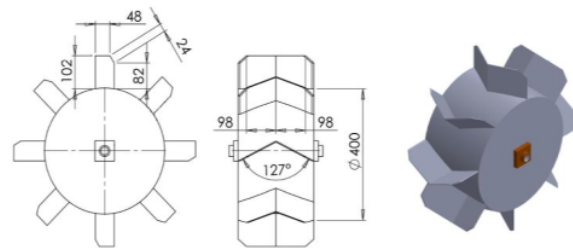


Fig. 2. Dethridge wheel geometry

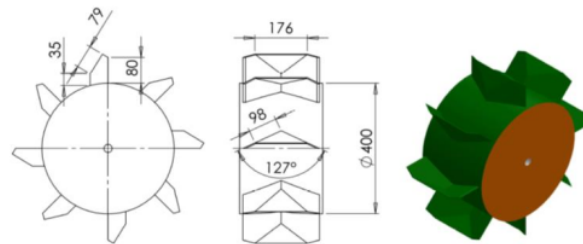


Fig. 3. Developed Dethridge wheel geometry

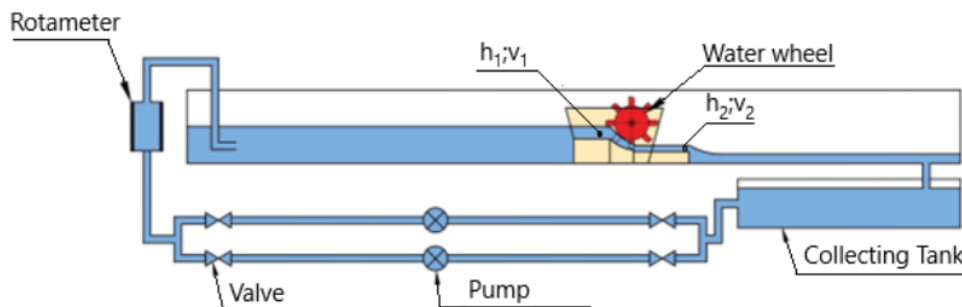


Fig. 4. Experimental setup

Two water pumps were used to pump water from the collecting tank to the canal by first passing the water through the rotameter, as shown in Figure 4. The water discharge was regulated by changing the pump rotation. The water that enters the canal flows towards the wheel, and afterward, it enters the collecting tank. Waterpower is obtained by multiplying the pressure due to the head difference with the flow of water (Q). The total head is obtained based on the difference in pressure and speed at the entrance and exit of the wheel, where h_1 and v_1 are the height and velocity of the water entering the wheel, respectively, while h_2 and v_2 are the height and velocity of the water leaving the wheel, respectively [19]

$$H = \left(h_1 + \frac{v_1^2}{2g} \right) - \left(h_2 + \frac{v_2^2}{2g} \right)$$

$$P_i = \rho \times Q \times g \times H$$

The power produced by the wheel is calculated by multiplying the torque (T) and angular velocity (ω)

$$P_o = T \times \omega$$

The efficiency of the wheel, which is a comparison of the waterwheel power and the waterpower, is obtained by

$$\eta = \frac{P_o}{P_i} \times 100\%$$

The moving mass of water (\dot{m}) causes the water force (F_a) to push the blade and create a tangential force of the wheel (F_t), which is perpendicular to the shaft of the wheel such that it generates the wheel force (F_e) [26,27]

$$\dot{m} = \rho \times A \times v$$

$$F_a = \dot{m} \times (v_2 - v_1)$$

$$F_t = \frac{F_a}{\cos \theta}$$

2.2 Computational Fluid Dynamics

Computational fluid dynamics (CFD) is dedicated to determining fluid flow behaviour using computational simulations [28]. The simulation was performed using Ansys Fluent 18.2 software and divided into two geometry models: DW and dDW. Furthermore, the simulation was carried out using 2D following Cleynen *et al.*, [29]. Each model utilised a geometry consisting of a stationary part and a rotating part to control the rotation of the turbine and improve the mesh quality.

The mesh used in this simulation had a maximum size of 20 mm globally and a minimum size of 2 mm in high-gradient areas, such as the rotating region, blade and surroundings, as shown in Figure 5 and Figure 6.

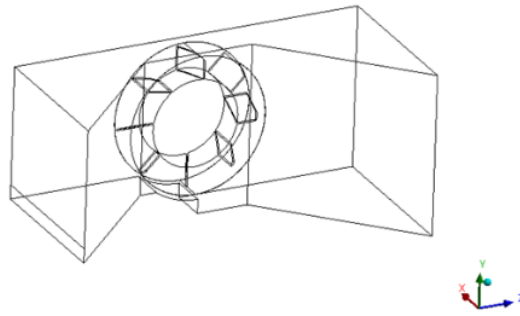


Fig. 5. CFD Wheel Geometry

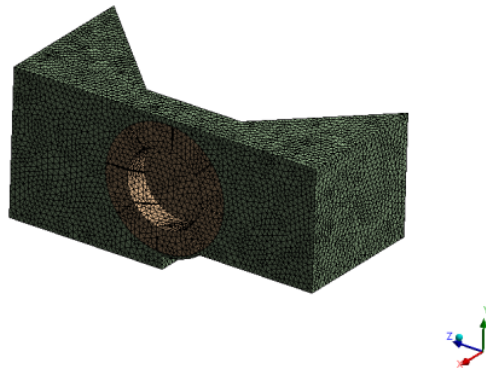


Fig. 6. Global Meshing

3. Results

3.1 Experimental Data

The waterwheel is given a torque load, which is maintained at 7 kg-cm, while the rotation of the wheel follows the discharge flow. The surface height and water flow velocity before and after the waterwheel change according to the increase in discharge flow, as can be seen in Table 2 and Table 3.

Table 2
Setting of CFD

Gravity	-9.81
Turbulent	k-omega, SST
Mesh Motion	Rotating
Fluid	Air and water

Table 3
Water levels of DW and dDW

Q (m ³ /h)	Water Level DW (m)		Water Level dDW (m)	
	h ₁	h ₂	h ₁	h ₂
20	0.041	0.013	0.040	0.011
30	0.051	0.018	0.056	0.017
60	0.073	0.019	0.068	0.019
90	0.083	0.020	0.074	0.021
120	0.094	0.022	0.088	0.024

The speed of the water before the wheel is different from the water after the wheel. The flow of water before the wheel has a Reynolds number of 2,357 for DW and 2,457 for dDW, which means that the water is in transitional flow and beginning to enter turbulent flow regime. The flow is laminar for $Re < 500$ in open-channel flow. Also, open channel flow is usually turbulent for $Re > 2500$ and transitional for $500 < Re < 2500$ [30]. The flow also appears wavy under visual observation, although the Froude number of the flow before the wheel is in the range of 0.28–0.42 for DW and 0.32–0.44 for dDW. This means that the flow is subcritical and dominated by gravity. Meanwhile, the flow after the wheel is turbulent, with a Reynolds number of 18,800 for both DW and dDW. Additionally, the Froude number after the wheel is 1.53–2.10 for DW and 1.64–2.07 for dDW, which means that the flow has become supercritical. Although the maximum output of the wheel decreases when the Reynolds number increases, the turbine has a blockage ratio of 0.88; thus, almost all of the flow force drives the wheel to rotate [31-33]. Therefore, according to Eq. (2), the waterpower has also increased, as shown in Figure 7.

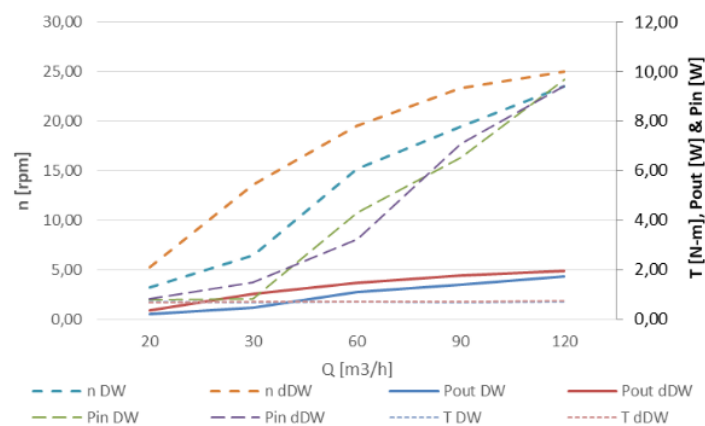


Fig. 7. Wheel rotation (n), torque (T), power of water (P_{in}) and power of wheel (P_{out}) for DW and dDW

In addition to displaying waterpower, Figure 7 also displays torque, wheel rotation and wheel power. The torque was kept at 0.7 N-m for both waterwheel types. The rotation increased with increasing water discharge. Theoretically, if the water discharge increases, the velocity and mass of the flow also increase, which causes the kinetic energy that moves the blade to increase [34-36]. Hence, the turbine power increases.

It appears that the rotation of the dDW is faster than that of the DW, although the difference becomes smaller with an increase in water discharge. The difference in the efficiency of the two waterwheels also decreased, as shown in Figure 8. The highest efficiency occurred at a discharge of 30 m³/h. At lower water discharge, the mass of water is not strong enough to overcome the waterwheel's inertia [37]. The simulation using CFD produced results that are in line with the experiment, as seen in Table 4.

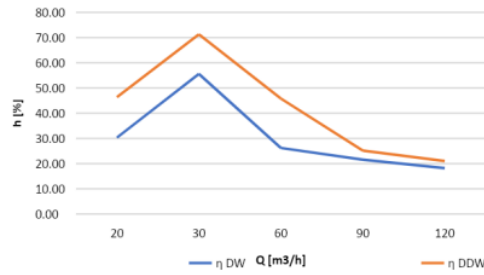


Fig. 8. Efficiency of DW and dDW

Table 4
 Velocities of DW and dDW

Q (m ³ /h)	Velocity DW (m/s)		Velocity dDW (m/s)	
	V ₁	V ₂	V ₁	V ₂
w	0.18	0.55	0.20	0.55
	0.25	0.71	0.27	0.70
	0.32	0.80	0.35	0.83
	0.35	0.92	0.40	0.92
	0.41	0.99	0.42	0.97


Table 5
 Torque in CFD simulation [N-m]

Q (m ³ /h)	DW	dDW
20	0.0712	0.1160
30	0.1603	0.2609
60	0.6415	1.0440
90	1.4435	2.3484
120	2.5663	4.1749

The water mass discharge varies between the two waterwheels to the different shapes of the blades, as shown in Figure 9.

Figure 9 demonstrates that the water held by the wheel has piled up, and the water piles up higher for greater flows. This happens for both blade shapes. However, the pile of water in the dDW is higher than in the DW because the water in the DW blades can immediately flow when leaving the shroud at the bottom of the wheel. Meanwhile, in the dDW, the water still pushes the blade at the top of the shroud. This can be explained by looking at the direction of the force acting on the blade, as illustrated in Figure 10.

Figure 10 shows the direction of the velocity when the water enters and leaves the DW and dDW, as presented previously by several studies [38-40]. The dDW has a greater effective velocity than the DW. The shape of the dDW blade enables the water to remain at the end of the shroud for longer. This extends the time and magnitude of the force pushing on the blade, thereby increasing the effective force and power [41,42].

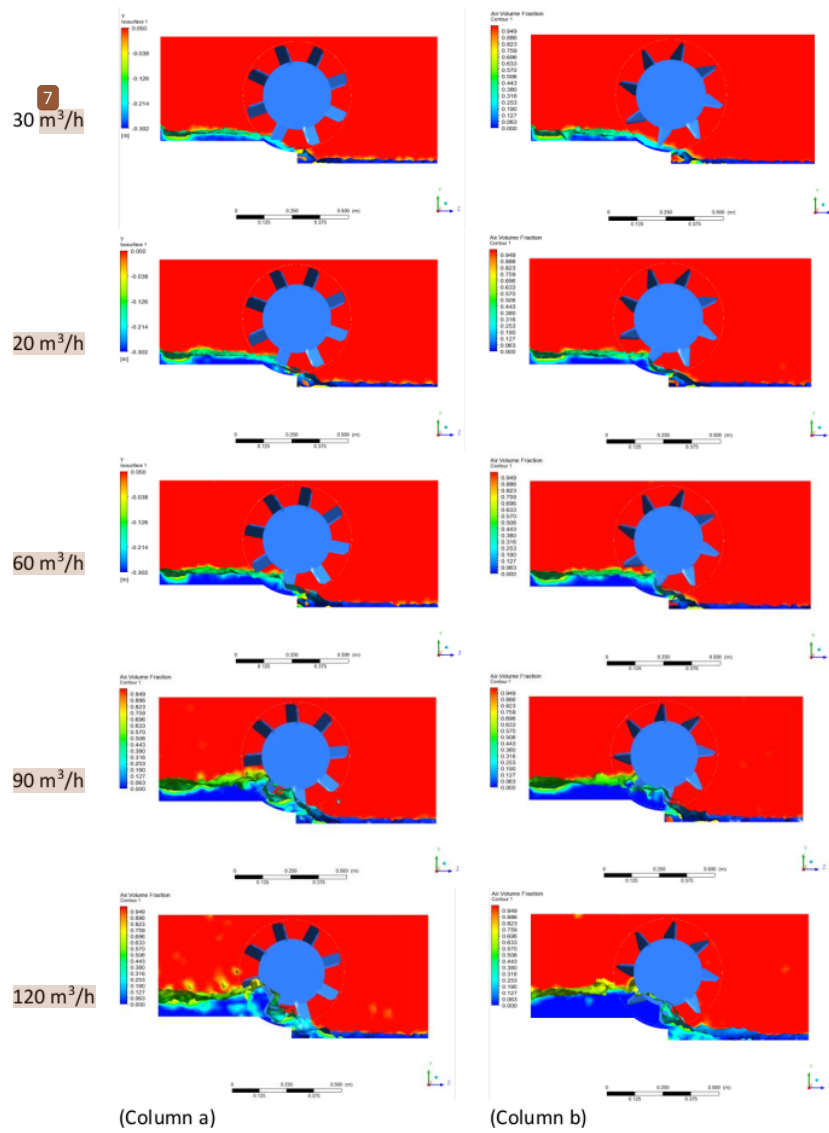

(Column a) (Column b)
Fig. 9. Water mass discharge of (Column a) DW and (Column b) dDW at water discharges of 20, 30, 60, 90 and 120 m³/h

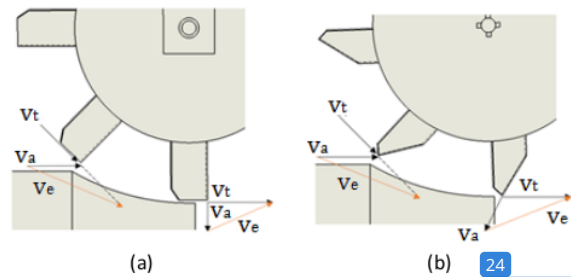


Fig. 10. Forces on DW (a) and dDW (b), v_t is tangential velocity, v_a is the inlet velocity of water, and v_e is an effective velocity

4. Conclusions

Although the head height in irrigation canals is usually relatively low, the energy possessed by the flow of water in irrigation canals has not been fully exploited, even though the energy potential is sufficiently large, especially in areas with hilly terrain. Thus, proper tools are needed to convert the flow of water energy into electrical energy. One tool that is simple and easy to manufacture is the Dethridge wheel.

Therefore, several developments pertaining to the Dethridge wheel blade have been conducted to improve its performance. The experimental results show that the shape of the waterwheel blade affects the power and efficiency. The developed Dethridge wheel utilises a blade shape that allows water to push continuously until the blade leaves the canal bed, causing larger forces for a longer duration, which consequently impacts power and efficiency. The highest efficiency of the Dethridge wheel was found to be 55.56%, while that of the developed Dethridge wheel was 71.72%. Thus, the developed Dethridge wheel increases efficiency by 29% at 30 m³/h. CFD results are also in agreement with the experiment.

3

Acknowledgement

This research was funded by a grant from Lemlitbang UHAMKA and supported by the Office of UPPI at Universitas Muhammadiyah Prof. Dr. Hamka.

References

- [1] British Petroleum. "BP statistical review of world energy June 2013." London: British Petroleum (2013).
- [2] International Energy Agency. "Electricity information: Overview (2020 edition)." IEA (2020).
- [3] Lubis, Hamzah. "Renewable Energy of Rice Husk for Reducing Fossil Energy in Indonesia." *Journal of Advanced Research in Applied Sciences and Engineering Technology* 11, no. 1 (2018): 17-22.
- [4] Ngowi, Joseph M., Lennart Bångens, and Erik O. Ahlgren. "Benefits and challenges to productive use of off-grid rural electrification: The case of mini-hydropower in Bulongwa-Tanzania." *Energy for Sustainable Development* 53 (2019): 97-103. <https://doi.org/10.1016/j.esd.2019.10.001>
- [5] Harlan, Tyler. "Rural utility to low-carbon industry: Small hydropower and the industrialization of renewable energy in China." *Geoforum* 95 (2018): 59-69. <https://doi.org/10.1016/j.geoforum.2018.06.025>
- [6] Muhammadu, M. M., and J. Usman. "Small Hydropower Development in North-Central of Nigeria: An Assessment." *Journal of Advanced Research in Applied Mechanics* 69, no. 1 (2020) 7-16. <https://doi.org/10.37934/aram.69.1.716>
- [7] Amran, Mohd Effendi, Mohd Nabil Muhtazaruddin, and Habibah@Norehan Haron. "Renewable Energy Optimization Review: Variables towards Competitive Advantage in Green Building Development." *Progress in Energy and Environment* 8 (2019): 1-15.
- [8] Choudhury, Shibabrata, Adikanda Parida, Rajive Mohan Pant, and Saibal Chatterjee. "GIS augmented computational intelligence technique for rural cluster electrification through prioritized site selection of micro-

- hydro power generation system." *Renewable Energy* 142 (2019): 487-496. <https://doi.org/10.1016/j.renene.2019.04.125>
- [9] Lubis, Abubakar. "Energi terbarukan dalam pembangunan berkelanjutan." *Jurnal Teknologi Lingkungan* 8, no. 2 (2007).
- [10] Ueda, Tatsuki, Masahiro Goto, Atsushi Namihira, and Yuichi Hirose. "Perspectives of small-scale hydropower generation using irrigation water in Japan." *Japan Agricultural Research Quarterly: JARQ* 47, no. 2 (2013): 135-140. <https://doi.org/10.6090/jarq.47.135>
- [11] Butera, Ilaria, and Roberto Balestra. "Estimation of the hydropower potential of irrigation networks." *Renewable and Sustainable Energy Reviews* 48 (2015): 140-151. <https://doi.org/10.1016/j.rser.2015.03.046>
- [12] Koç, Cengiz. "A study on operation problems of hydropower plants integrated with irrigation schemes operated in Turkey." *International Journal of Green Energy* 15, no. 2 (2018): 129-135. <https://doi.org/10.1080/15435075.2018.1427591>
- [13] Kadier, Abudukeremu, Mohd Sahaid Kalil, Manoj Pudukudy, Hassimi Abu Hasan, Azah Mohamed, and Aidil Abdul Hamid. "Pico hydropower (PHP) development in Malaysia: Potential, present status, barriers and future perspectives." *Renewable and Sustainable Energy Reviews* 81 (2018): 2796-2805. <https://doi.org/10.1016/j.rser.2017.06.084>
- [14] Williamson, Samuel J., W. David Lubitz, Arthur A. Williams, Julian D. Booker, and Joseph P. Butchers. "Challenges Facing the Implementation of Pico-Hydropower Technologies." *Journal of Sustainability Research* 2, no. 1 (2019). <https://doi.org/10.20900/jsr20200003>
- [15] Balkhair, Khaled S., and Khalil Ur Rahman. "Sustainable and economical small-scale and low-head hydropower generation: A promising alternative potential solution for energy generation at local and regional scale." *Applied Energy* 188 (2017): 378-391. <https://doi.org/10.1016/j.apenergy.2016.12.012>
- [16] Siswantara, Ahmad Indra, Budiarmo Budiarmo, Aji Putro Prakoso, Gun Gun R. Gunadi, Warjito Warjito, and Dendy Adanta. "Assessment of turbulence model for cross-flow pico hydro turbine numerical simulation." *CFD Letters* 10, no. 2 (2018): 38-48.
- [17] Bozorgi, A., E. Javidpour, A. Riasi, and A. Nourbakhsh. "Numerical and experimental study of using axial pump as turbine in pico hydropower plants." *Renewable Energy* 53 (2013): 258-264. <https://doi.org/10.1016/j.renene.2012.11.016>
- [18] Tevata, Anurat, and Chainarong Inprasit. "The effect of paddle number and immersed radius ratio on water wheel performance." *Energy Procedia* 9 (2011): 359-365. <https://doi.org/10.1016/j.egypro.2011.09.039>
- [19] Paudel, Shakun, Martin Weber, Dirk Geyer, and Nicole Saenger. "Zuppinger water wheel for very low-head hydropower application." In *10th International Conference on Sustainable Energy and Environment Protection: Marine and Hydro Power*, pp. 25-34. University of Maribor Press, 2017. <https://doi.org/10.18690/978-961-286-055-4.3>
- [20] Quaranta, Emanuele, and Gerald Müller. "Optimization of undershot water wheels in very low and variable flow rate applications." *Journal of Hydraulic Research* 58, no. 5 (2020): 845-849. <https://doi.org/10.1080/00221686.2019.1671508>
- [21] Senior, James, Nicole Saenger, and Gerald Müller. "New hydropower converters for very low-head differences." *Journal of Hydraulic Research* 48, no. 6 (2010): 703-714. <https://doi.org/10.1080/00221686.2010.529301>
- [22] Paudel, Shakun, and Nicole Saenger. "Dethridge wheel for pico-scale hydropower generation: An experimental and numerical study." In *IOP Conference Series: Earth and Environmental Science*, vol. 49, no. 10, p. 102007. IOP Publishing, 2016. <https://doi.org/10.1088/1755-1315/49/10/102007>
- [23] Paudel, Shakun, and Nicole Saenger. "Effect of channel geometry on the performance of the Dethridge water wheel." *Renewable Energy* 115 (2018): 175-182. <https://doi.org/10.1016/j.renene.2017.08.043>
- [24] Mugisidi, Dan, Oktarina Heriyani, Rizal Andi Luhung, and Moh Ramdani Dwi Andrian. "Utilization of the dethridge wheel as a low head power generator and loss analysis." In *MATEC Web of Conferences*, vol. 204, p. 04003. EDP Sciences, 2018. <https://doi.org/10.1051/mateconf/201820404003>
- [25] Effendy, Effendy. "Disain Saluran Irigasi." *Pilar: Jurnal Teknik Sipil Politeknik Negeri Sriwijaya* 7, no. 2 (2012).
- [26] Boli, Rahmat, Abdul Makhsum, and Mahmuddin Tahir. "Analisis Daya Output dan Efisiensi Kincir Air Sudu Miring yang Bekerja pada Saluran Horizontal." *Gorontalo Journal of Infrastructure and Science Engineering* 1, no. 2 (2018): 1-7. <https://doi.org/10.32662/gojise.v1i2.423>
- [27] Denny, Mark. "The efficiency of overshot and undershot waterwheels." *European Journal of Physics* 25, no. 2 (2003): 193. <https://doi.org/10.1088/0143-0807/25/2/006>
- [28] Tu, Jiyuan, Guan Heng Yeoh, and Chaoqun Liu. *Computational fluid dynamics: a practical approach*. Butterworth-Heinemann, 2018.

- [29] Cleynen, Olivier, Emeel Kerikous, Stefan Hoerner, and Dominique Thévenin. "Characterization of the performance of a free-stream water wheel using computational fluid dynamics." *Energy* 165 (2018): 1392-1400. <https://doi.org/10.1016/j.energy.2018.10.003>
- [30] Çengel, Yunus A., and John M. Cimbala. *Fluid Mechanics Fundamentals and Applications (3rd Edition in SI Units)*. McGraw Hill, 2013.
- [31] Vidali, Cristina, Stefano Fontan, Emanuele Quaranta, Paolo Cavagnero, and Roberto Revelli. "Experimental and dimensional analysis of a breastshot water wheel." *Journal of Hydraulic Research* 54, no. 4 (2016): 473-479. <https://doi.org/10.1080/00221686.2016.1147499>
- [32] Mugisidi, Dan, Oktarina Heriyani, Rizal Andi Luhung, and Moh Ramdani Dwi Andrian. "Utilization of the dethridge wheel as a low head power generator and loss analysis." In *MATEC Web of Conferences*, vol. 204, p. 04003. EDP Sciences, 2018. <https://doi.org/10.1051/mateconf/201820404003>
- [33] Quaranta, Emanuele. "Stream water wheels as renewable energy supply in flowing water: Theoretical considerations, performance assessment and design recommendations." *Energy for Sustainable Development* 45 (2018): 96-109. <https://doi.org/10.1016/j.esd.2018.05.002>
- [34] Muliawan, Arief, and Ahmad Yani. "Analisis daya dan efisiensi turbin air kinetis akibat perubahan putaran runner." *Sainstek: Jurnal Sains dan Teknologi* 8, no. 1 (2017): 1-9. <https://doi.org/10.31958/js.v8i1.434>
- [35] Yani, Ahmad, Mihdar Mihdar, and Rudi Erianto. "Pengaruh Variasi Bentuk Sudu Terhadap Kinerja Turbin Air Kinetik (Sebagai Alternatif Pembangkit Listrik Daerah Pedesaan)." *Turbo: Jurnal Program Studi Teknik Mesin* 5, no. 1 (2017). <https://doi.org/10.24127/trb.v5i1.113>
- [36] Bahaj, A. S., A. F. Molland, J. R. Chaplin, and W. M. J. Batten. "Power and thrust measurements of marine current turbines under various hydrodynamic flow conditions in a cavitation tunnel and a towing tank." *Renewable Energy* 32, no. 3 (2007): 407-426. <https://doi.org/10.1016/j.renene.2006.01.012>
- [37] Prabowo, Boy Ilham, and Priyo Heru Adiwibowo. "Eksperimental Kinerja Turbin Reaksi Aliran Vortex Tipe Sudu Berpenampang L Dengan Variasi Panjang Sisi Lurus Pada Ujung Sudu." *Jurnal Teknik Mesin* 6, no. 1 (2018): 115-123.
- [38] Müller, G., and Christian Wolter. "The breastshot waterwheel: design and model tests." In *Proceedings of the Institution of Civil Engineers-Engineering Sustainability*, vol. 157, no. 4, pp. 203-211. Thomas Telford Ltd, 2004. <https://doi.org/10.1680/ensu.2004.157.4.203>
- [39] Zaman, Ayesha, and Taslima Khan. "Design of a water wheel for a low head micro hydropower system." *Journal Basic Science and Technology* 1, no. 3 (2012): 1-6.
- [40] Nguyen, Manh Hung, Haechang Jeong, and Changjo Yang. "A study on flow fields and performance of water wheel turbine using experimental and numerical analyses." *Science China Technological Sciences* 61, no. 3 (2018): 464-474. <https://doi.org/10.1007/s11431-017-9146-9>
- [41] Anam, Asroful, Rudy Soenoko, and Denny Widhiyanuriyawan. "Pengaruh variasi sudut input sudu mangkok terhadap kinerja turbin kinetik." *Jurnal Rekayasa Mesin* 4, no. 3 (2014): 199-203.
- [42] Adanta, Dendy, Satrio Adi Arifianto, and Sanjaya BS Nasution. "Effect of blades number on undershot waterwheel performance with variable inlet velocity." In *2018 4th International Conference on Science and Technology (ICST)*, pp. 1-6. IEEE, 2018.

Dan Mugisidi - Development of the Dethridge Wheel Blade Shape for Hydropower Generation in Irrigation Canals in Indonesia

ORIGINALITY REPORT

12%

SIMILARITY INDEX

10%

INTERNET SOURCES

3%

PUBLICATIONS

1%

STUDENT PAPERS

PRIMARY SOURCES

1	silo.pub Internet Source	2%
2	iopscience.iop.org Internet Source	1%
3	umexpert.um.edu.my Internet Source	1%
4	Submitted to University of Illinois at Urbana-Champaign Student Paper	1%
5	www.econstor.eu Internet Source	1%
6	repository.uhamka.ac.id Internet Source	1%
7	www.bad-saulgau.de Internet Source	1%
8	ejournal.radenintan.ac.id Internet Source	<1%

9	www.thaiscience.info Internet Source	<1 %
10	www.mdpi.com Internet Source	<1 %
11	Emanuele Quaranta, Roberto Revelli. "CFD simulations to optimize the blades design of water wheels", Copernicus GmbH, 2017 Publication	<1 %
12	Jamal A. Hameed, Amer T Saeed, Mugdad H. Rajab. "Design and Study of Hydroelectric Power Plant by Using Overshot and Undershot Waterwheels", International Journal of Energy Optimization and Engineering, 2019 Publication	<1 %
13	gurutraders.successfinancialfreedom.com Internet Source	<1 %
14	Daqing Zhou, Jia Gui, Zhiqun Daniel Deng, Huixiang Chen, Yunyun Yu, An Yu, Chunxia Yang. "Development of an ultra-low head siphon hydro turbine using computational fluid dynamics", Energy, 2019 Publication	<1 %
15	archive.nlm.nih.gov Internet Source	<1 %
16	ejournal.unesa.ac.id Internet Source	<1 %

<1 %

17

ijrer.org

Internet Source

<1 %

18

link.springer.com

Internet Source

<1 %

19

odr.chalmers.se

Internet Source

<1 %

20

open.uct.ac.za

Internet Source

<1 %

21

revistas.tec.ac.cr

Internet Source

<1 %

22

www.ajbasweb.com

Internet Source

<1 %

23

www.science.gov

Internet Source

<1 %

24

www.tandfonline.com

Internet Source

<1 %

25

www.uni-flensburg.de

Internet Source

<1 %

Exclude quotes Off

Exclude matches Off

Exclude bibliography On