

# Ristanto Wirangga - THE IMPACT OF WIND SPEED ON THE RATE OF WATER EVAPORATION IN A DESALINATION CHAMBER

*by Ristanto Wirangga Uploaded By Lutfan Zulwaqar*

---

**Submission date:** 29-May-2023 09:56AM (UTC+0700)

**Submission ID:** 2104170349

**File name:** Ristanto\_Wirangga\_Teknik\_Mesin\_TURNITIN\_KE-1.docx (1.18M)

**Word count:** 4803

**Character count:** 26309



## THE IMPACT OF WIND SPEED ON THE RATE OF WATER EVAPORATION IN A DESALINATION CHAMBER

Ristanto Wirangga<sup>1</sup>, Dan Mugisidi<sup>1,\*</sup>, Adi Tegar Sayuti<sup>1</sup>, Oktarina Heriyani<sup>1</sup>

<sup>25</sup>  
<sup>10</sup> Department of Mechanical engineering, Faculty of Industrial and Informatic Technology, Universitas Muhammadiyah Prof. Dr. HAMKA, Indonesia

### ARTICLE INFO

#### Article history:

Received  
Received in revised form  
Accepted  
Available online

#### Keywords:

sea water; desalination; evaporation;  
wind velocity

### ABSTRACT

Water is v<sup>30</sup> important to human life, and its use is increasing as the population grows. However, sources of fresh water on the earth's surface are limited, as seawater covers most of th<sup>6</sup> earth. Therefore, seawater desalination is a potential solution to water shortages. Desalination is the process of removing salt from seawater to produce fresh water. Desalination is particularly useful approach in Indonesia because two-thirds of this nation's terr<sup>29</sup> is ocean. Desalination involves two stages: evaporation <sup>20</sup> condensation. Wind speed affects the rate of evaporation. Thus, this study explores the effect of wind speed on the rate of evaporation. Wind speed was regulated using a fan, and wind speeds of 0 m/s, 0.6 m/s, 2.6 m/s, and 5 m/s were tested; the wa<sup>17</sup> temperature was kept constant at 60 °C. The data were analysed statistically to determine the effect <sup>1</sup> wind speed on the evaporation of seawater. The highest rate of evaporation occurred at a wind speed of 5 m/s <sup>22</sup> d the lowest at a wind speed of 0 m/s. The highest amount of condensation occurred at a wind speed of 0.6 m/s and the lowest at a wind speed of 5 m/s.

## 1. Introduction

Water is very important for humans. Water consumption increases as the number of people on earth increases [1], and a global population increase of 15% will reduce the quality [2] and amount of clean water by 40% [3]. Clean water shortages occur all over the world, including in Indonesia. In fact, in several places in Indonesia lack clean water and must buy it from other areas [4], [5]. Even though Indonesia is the largest archipelagic country in the world and two-thirds of its area (3,288,683 km<sup>2</sup>) consists of ocean [6], shortages of clean water occur in many places [7], especial<sup>33</sup> in coastal regions, only 66.54% have access t<sup>24</sup> clean water [8]. This is a serious concern; only 2.8% of water on the earth's surface is fresh, while the rest is advance water [9]. Therefore, seawater is a potential source of clean water [10], and due to the abundance of seawater in Indonesia, desalinating seawater to convert it to clean water could help address the nation's water problems [11].

\* Corresponding author.

E-mail address: [dan.mugisidi@uhamka.ac.id](mailto:dan.mugisidi@uhamka.ac.id)

<https://doi.org/10.37934/arfmts.XX.X.XX>

6  
Desalination is the process of removing the salt from seawater to produce fresh water [12] [13] that uses two processes to separate salt from water: evaporation and condensation [15] [16]. The resulting fresh water can be used for various human needs, including drinking, washing, and cooking [17]. In addition to converting seawater into fresh water, the desalination process also produces salt through the separation of seawater content. The salt produced through this process has potential as a valuable product. However, modern desalination equipment is fairly inefficient due to ineffective evaporation processes [18].

Many studies on evaporation have been conducted. Some study that have been explored include the effect of pressure and material on evaporation [19]–[23]; the impact of the angle of the glass roof and the mirror at the base of the basin on evaporation [24], [25]; the effect of sunlight on evaporation [26], [27]; the effect of water level on evaporation [28]–[32]; the effect of temperature on evaporation [33]–[34]; and the use of mist sprayed from a nozzle to evaporate water [35][36]. However, no previous study has explored the effect of wind speed on the evaporation of sea water in desalination chamber.

7  
Therefore, the present study aimed to determine the effect of wind speed on the evaporation of seawater in a desalination device. This study has analysed the impact of various wind speeds on the evaporation of seawater at a constant temperature. It is hoped that this research can also be useful for the traditional salt-making industry, where in making salt they use an evaporation process that relies on wind speed and sunlight so that this research can also increase the efficiency of their salt-making.

### 1.1 Mass Transfer

Mass transfer is the transfer of a substance in a mixture from one location to another [37] [38], [39]. Mass transfer can also be interpreted as the driving force that causes the movement of molecules in liquid [40], [41]. The mechanism of mass transfer is largely due to the dynamics of liquids [42]. Many physical and chemical processes involve mass transfer, including adsorption, evaporation, precipitation, membrane filtration, desalination and drying [43]. Engineers use mass transfer to describe physical processes involving molecular diffusion and the convection transfer of chemical species within a system. Previous studies have shown that number of mass transfer can vary depending on the physical and chemical parameters of the system, such as temperature, pressure, viscosity, and flow rate [44] [45].

Evaporation is the process by which water transforms into water vapour or gas. It is caused by the difference in pressure between the surface of the water and the air above it [46]. Evaporation can be affected by several physical parameters, including humidity, wind speed and air temperature [47], [48]. There are various methods for measuring evaporation [49].

Evaporation rate calculation:

According to [50], the rate of evaporation is defined as:

$$E_{tp} = (0.37 + 0.0041 \bar{u})(p_s - p_w)^{0.88} \quad (1)$$

Where:

$E_{tp}$  = evaporation rate, in/day,

$\bar{u}$  = wind movement, mi/day,

$p_s$  = saturation vapor pressure at air temperature water vapor, in Hg, and

$p_w$  = actual vapor pressure of air under conditions of temperature and humidity, in Hg.

To calculate the mass evaporation rate per unit area, [37] uses the following equation:

$$\frac{\dot{m}_w}{A} = \frac{E_{tp}}{12} \rho_w \quad (2)$$

Where:

$E_{tp}$  = mass evaporation rate per unit area,  $kg/h \cdot m^2$  and

$\rho_w$  = water density,  $lb/ft^3$ .

To determine the efficiency of the condenser in a desalination system, condensation efficiency is calculated using the following equation [51]:

$$(\eta) = \frac{\text{condensation results}}{\text{evaporation result}} \times 100\% \quad (3)$$

## 1.2 Pressure

Pressure is one of the primary factors impacting the rate of evaporation [15]. Therefore, it is necessary to determine the pressure in the water and on its surface because evaporation occurs when the air pressure above the water is lower than the surface water pressure. When the air pressure is low, water molecules evaporate into the atmosphere, leaving water behind. During evaporation, water molecules draw heat from the environment, which causes the temperature of the water to decrease and reduces the concentration of water molecules in the water.

The following equation is used to calculate water pressure [53]:

$$P_w = \exp \left[ 25.317 - \frac{5144}{T_w + 273} \right] \quad (4)$$

Where:

$P_w$  = water pressure (Pa) and

$T_w$  = water temperature ( $^{\circ}C$ ).

## 2. Methods


In this study, a temperature of  $60^{\circ}C$  was maintained in the main water container. Several wind speeds (0 m/s, 0.6 m/s, 2.6 m/s, and 5 m/s) were obtained using an adjustable fan to compare the rate of seawater evaporation during desalination at different wind speeds [54]. High wind speeds can help remove the water vapor from the surface of the desalination device and reduce the pressure, thus accelerating evaporation. However, wind speeds that are too high can cause vortices and energy losses [54].

Thus, various wind speeds were compared in this study to help determine the optimal conditions to maximize the evaporation rate of seawater during desalination. The following tools were used:

**Table 1.** Measurement tools


No	Tools	Function	Specifications
----	-------	----------	----------------

1	Thermostat XH-W3001	Temperature	-50°C -110°C, ±0.1°C.
2	Anemometer GM816	Wind speed	0 – 30 m/s, 0.1 m/s,
3	Digital thermometer	Water temperature	-50°C -110°C, ±0.1°C
4	Digital hygrometer	Humidity	10% – 99%, ±1%
5	Digital scale 40 kg	Water mass	0 – 40 kg, 0.005 kg
6	Digital scale 5 kg	Condensed water mass	0 – 5 kg, 1 gr

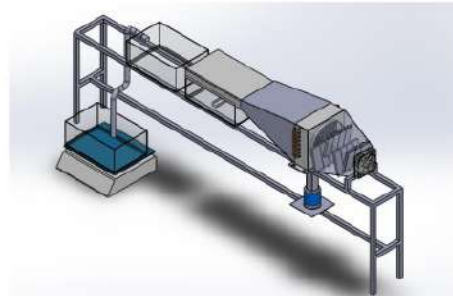

**Fig. 1.** Experimental rig

Figure 1 shows the design of the research tool. The study was conducted in the mechanical engineering laboratory of the Faculty of Industrial and Informatics Technology at the Universitas Muhammadiyah Prof. Dr. HAMKA from March to August 2022.

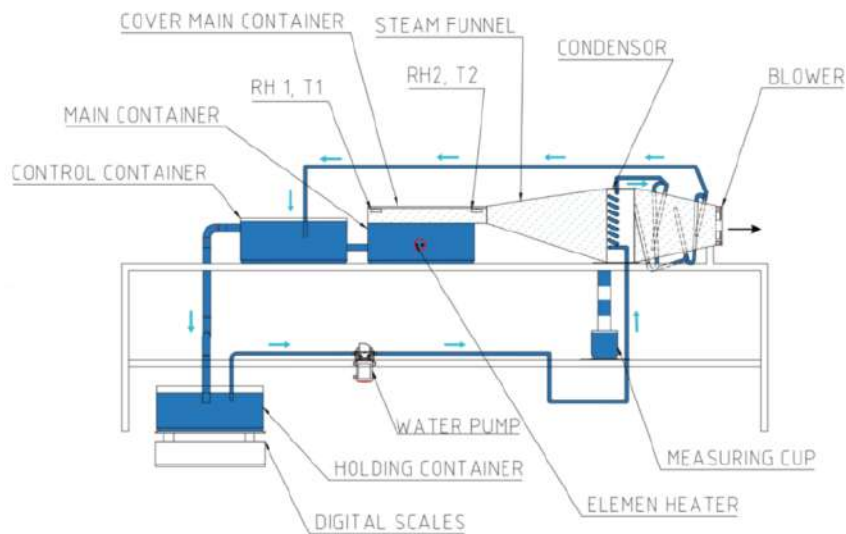

**Fig. 2.** Experimental setup



Figure 2 shows a schematic of a desalination device used in this study. In this device, seawater in the main container is heated to maintain the water temperature at 60°C. As the water evaporates, water vapour moves towards the steam funnel and through it to the condenser. Wind speeds of 0 m/s, 0.6 m/s, 2.6 m/s and 5 m/s were tested. Seawater in the holding container is channelled to the condenser by a pump. Water from the condenser flows into the control container through the condenser outlet. To maintain the water level at a certain level, the control container has an overflow into the holding container. Therefore, the water level in the control container remains constant, while the water level in the holding container decreases due to evaporation. So that the rate of evaporation is measured by the mass of the water in the holding container. Every 15 minutes, the mass of the water in the holding container is measured using a digital scale to determine whether the water mass has reduced due to evaporation. In Figure 2, data are collected at RH1, RH2, T1 and T2. Where T1 is temperature of the incoming air above the seawater in the main container, T2 is temperature of the outgoing air over the seawater in the main container, RH1 is humidity of the incoming air over the seawater in the main container and RH 2 is humidity of the outgoing air over the seawater in the main container.

This study was conducted indoors to minimise of uncontrollable variables such as wind speed and solar radiation.

### 3. Results

In this study, four variables were tested: wind speeds of 0 m/s, 0.6 m/s, 2.6 m/s and 5 m/s. Other data collected were water and air temperature, relative humidity, mass of water in holding container to measure evaporation results and mass of measuring cup to measure condensation results.



Fig. 3. Desalination equipment

Figure 3 shows the evaporation and condensation data collection processes. Seawater in the main container is heated using a heater which is regulated by a thermostat to maintain a constant temperature of 60°C. Data collection begins when seawater in the holding container is pumped into the condenser, from there to the heat exchanger, and from there to the control container, which is connected to the main container. This ensures a constant level of seawater in the main container. Data were collected every 15 minutes for two hours.

#### 3.1 Total Evaporation


To determine how much seawater evaporates under four different wind speeds, it is necessary to measure the reduction in mass of water in the holding container. This was measured using digital scales to determine how much seawater evaporated during desalination.

Using equations 1 and 2, the theoretical and measured evaporation rates per unit area over two hours were calculated; the results are shown in Table 2.

**Table 2.** Experimental and theoretical evaporation

	Experimental	Theoretical
$V = 0 \text{ m/s}$	335 ml	360.5 ml
$V = 0.6 \text{ m/s}$	455 ml	496.3 ml
$V = 2.6 \text{ m/s}$	530 ml	549.8 ml
$V = 5 \text{ m/s}$	715 ml	763.5 ml

The values shown in Table 2 are plotted in Fig. 4 to illustrate the correlation between the experimental and theoretical evaporation.

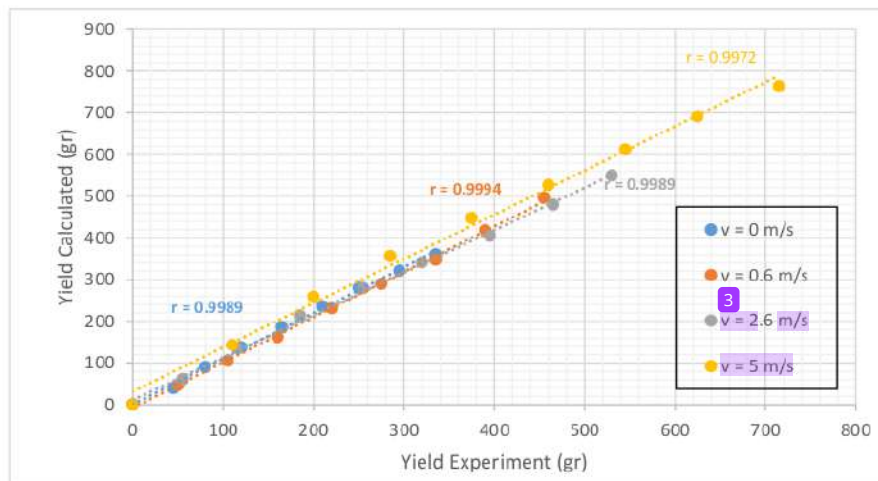

**Fig. 4.** Correlation of experimental and theoretical evaporation rates

The experimental results show the actual evaporation rates at various wind speeds over a period of two hours. These results show that higher wind speeds led to higher evaporation rates. At a wind speed of 0 m/s, the actual evaporation rate is 335 ml, while at a wind speed of 0.6 m/s, the actual evaporation rate increases to 445 ml. At a wind speed of 2.6 m/s, the actual evaporation rate is 530 ml, and at a wind speed of 5 m/s, the actual evaporation rate reaches 715 ml. The theoretical evaporation rates at these wind speeds were also calculated. The theoretical evaporation rate at a wind speed of 0 m/s is 360.505 ml, while at a wind speed of 0.6 m/s, the theoretical evaporation rate increases to 496.3 ml. At a wind speed of 2.6 m/s, the theoretical evaporation rate is 549.8 ml, and at a wind speed of 5 m/s, the theoretical evaporation rate reaches 763.5 ml. The results of this study show that wind speed significantly impacts the evaporation rate. Increased wind speed causes a decrease in air pressure above the basin, accelerating the evaporation process [55].


It can therefore be concluded from these findings that wind speed affects the rate of evaporation. However, it should be noted that the theoretical evaporation rate may differ from the actual evaporation rate due to other factors not measured in this study. The results of this study can be used as a reference for calculating the evaporation rate in a given location based on wind speed.

The correlation between measured and theoretical evaporation rates ranges from 0.9972 to 0.9994 (Fig. 4), which means it is between 0.99 and 1. This indicates a strong correlation between actual and theoretical evaporation rates in the present study [56] and the future similar studies can be predicted using this calculation. Thus, it can be concluded that wind speed significantly affects evaporation, and this study shows that the measured evaporation rates correlate strongly with theoretical calculations. These findings can be used as a basis for developing a model to predict evaporation rates.

**Table 3.** Air pressure over the basin

Air pressure over the basin			
v = 0 m/s	v = 0.6 m/s	v = 2.6 m/s	v = 5 m/s
10433 Pa	6159 Pa	5451 Pa	5123 Pa

Pressure is one of the main factors impacting evaporation [57]; therefore, in the present study, it was necessary to measure the pressure in the water vapor and the surface pressure of the water. This is because evaporation is caused by pressure differences. The vapour properties [58] were used to measure the air pressure above the basin as shown in Table 3. Water pressure was calculated as 19,331.67 Pa using equation 4. Thus, the air pressure above the surface of the water is lower than the water pressure; this difference in pressure causes evaporation [59].

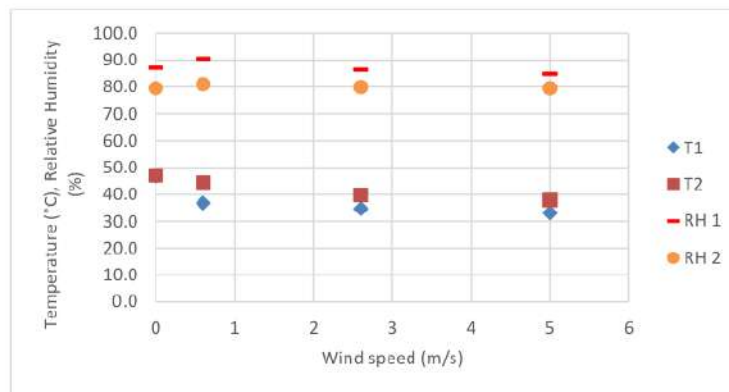

**Fig. 5.** Temperature (T1, T2) and relative humidity (RH1, RH2)

As seen in Figure 5, the temperature of the air entering the basin (T1) is always lower than the temperature of the air leaving the basin (T2). This is because, during evaporation, water draws heat energy and transforms into water vapor [60]. Therefore, the air leaving the basin has a higher temperature because it has heat energy.

As shown in Figure 5, higher wind speeds decrease the air temperature. Thus, increasing the wind speed increases the rate of evaporation because the wind carries the newly formed water vapor away from the surface of the water and replaces it with drier air. Increasing the wind speed also increases the rate at which heat is transferred from the surface of the water to the surrounding air, decreasing the air temperature further.



<sup>5</sup> Relative humidity (RH) is a ratio of the humidity ratio of a particular water-air mixture compared to the saturation humidity ratio at a given temperature (dry-bulb) [61]. As wind speed increases, the pressure of partial water vapour decreases, causing RH to decrease. This is shown in Table 3; higher wind speeds lead to lower pressure in the partial water vapour. As shown in Figure 5, increasing the wind speed decreases the humidity. Previous studies [62] have also shown that higher wind speeds lead to lower RH. The decrease in humidity from the time of entry (RH1) to exit (RH2) depends on wind speed; faster wind speeds bring water vapour, decreasing air humidity, which accelerates evaporation [63].

### 3.2 Amount of Condensed Water Produced

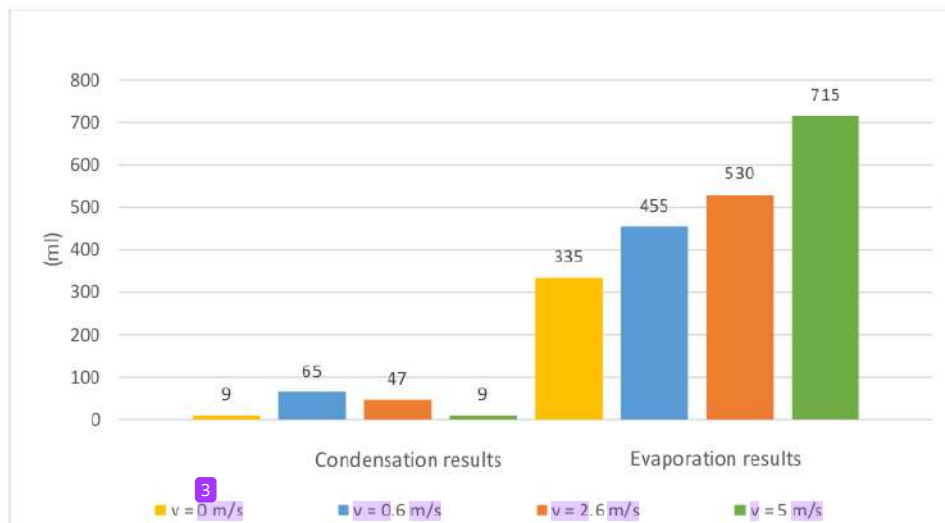


Fig. 6 Evaporation vs condensation over a two-hour period

Equation 3 was used to calculate the condensation efficiency of the desalination device. <sup>4</sup> At a wind speed of 0 m/s, the device's efficiency is 2.69%; <sup>1</sup> at a wind speed of 0.6 m/s, it is 14.28%; at a wind speed of 2.6 m/s, it is 8.87%; and at a wind speed of 5 m/s, it is 1.26%. These results indicate that changing the condenser would improve the efficiency of condensation [64].

<sup>12</sup>

## 4. Conclusions

Based on the results of the study, it can be concluded that wind speed significantly impacts the rate of seawater evaporation during desalination. The present study has demonstrated that increasing the wind speed accelerates evaporation. Over a period of two hours, the highest amount of water evaporated (715 ml) with a wind speed of 5 m/s; the lowest amount of water evaporated (335 ml) with a wind speed of 0 m/s. However, higher wind speeds also decrease condensation because wind causes the water vapour to exit the condenser more quickly, before it can condense. Therefore, the condenser used in this research should be improved to support more efficient desalination.

## Acknowledgement

<sup>9</sup> The author would like to thank the UHAMKA Research and Development Office for funding this research under contract number 51/F.03.07/2022.

## References

- [1] S. M. Habib, A. Hamed, A. Y. Youssef, M. Kassem, and A. Hanafi, "Dynamic Modeling and Simulation of the Forward Feed MED-TVC Desalination Plant," *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*, vol. 92, no. 1, pp. 190–211, 2022, doi: <https://doi.org/10.37934/arfmts.92.1.190211>.
- [2] N. A. Maizunati and M. Z. Arifin, "Pengaruh Perubahan Jumlah Penduduk Terhadap Kualitas Air Di Indonesia," *Jurnal Litbang Provinsi Jawa Tengah*, vol. 15, no. 2, pp. 207–215, 2017, doi: <https://doi.org/10.36762/litbangjateng.v15i2.417>.
- [3] J. Schewe *et al.*, "Multimodel assessment of water scarcity under climate change," *Proc Natl Acad Sci U S A*, vol. 111, no. 9, pp. 3245–3250, 2014, doi: <https://doi.org/10.1073/pnas.1222460110>.
- [4] M. Bakrie, "Krisis Air Bersih Melanda Pesisir Maros Sulsel," *Detiknews*, 2019.
- [5] K. B. A. Walangare, A. S. M. Lumenta, J. O. Wuwung, and B. A. Sugiarto, "Rancang Bangun Alat Konversi Air Laut Menjadi Air Minum Dengan Proses Destilasi Sederhana Menggunakan Pemanas Elektrik," *Jurnal Teknik Elektro dan Komputer*, vol. 2, no. 2, 2013.
- [6] F. Shalihah, "Perlindungan Hukum Terhadap Kedaulatan Wilayah Negara Republik Indonesia Menurut Konsep Negara Kepulauan Dalam United Nation Convention On The Law Of The Sea (Unclos) 1982," *PROSIDING SNPK*, vol. 1, 2016.
- [7] F. Lestari, T. Susanto, and K. Kastamto, "Pemanenan Air Hujan Sebagai Penyediaan Air Bersih Pada Era New Normal Di Kelurahan Susunan Baru," *SELAPARANG Jurnal Pengabdian Masyarakat Berkemajuan*, vol. 4, no. 2, p. 427, 2021, doi: <https://doi.org/10.31764/jpmb.v4i2.4447>.
- [8] LIPI, "Indonesia Negeri Tropis, Tapi Krisis Air Bersih di Kawasan Pesisir Terjadi?," Apr. 05, 2018.
- [9] V. Belessiotis, S. Kalogirou, and E. Delyannis, *Thermal Solar Desalination Methods and Systems*. Elsevier, 2016. doi: [10.1016/c2015-0-05735-5](https://doi.org/10.1016/c2015-0-05735-5).
- [10] D. Mugisidi, O. Heriyani, and Z. S. Abdel-rehim, "The influence of container material conductivity to sea water evaporation The Influence of Container Material Conductivity to Sea Water Evaporation," vol. 030023, no. June, 2018, doi: <https://doi.org/10.1063/1.5042943>.
- [11] Dan. Mugisidi and O. Heriyani, "Sea Water Characterization at Ujung Kulon Coastal Depth as Raw Water Source for Desalination and Potential Energy," in *The 2nd International Conference on Energy, Environmental and Information System (ICENIS 2017)*, 2018. doi: <https://doi.org/10.1051/e3sconf/20183102005>.
- [12] D. Curto, V. Franzitta, and A. Guercio, "A Review of the Water Desalination Technologies," 2021, doi: <https://doi.org/10.3390/app11020670>.
- [13] K. A. A. Wahid *et al.*, "Self-Desalination Seawater Jig Based on Solar Thermal Energy," *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*, vol. 91, no. 1, pp. 92–101, 2022, doi: <https://doi.org/10.37934/arfmts.91.1.92101>.
- [14] P. G. Youssef, R. K. Al-Dadah, and S. M. Mahmoud, "Comparative analysis of desalination technologies," *Energy Procedia*, vol. 61, pp. 2604–2607, 2014, doi: <https://doi.org/10.1016/j.egypro.2014.12.258>.
- [15] A. Amirfakhræi, T. Zarei, and J. Khorshidi, "Performance improvement of adsorption desalination system by applying mass and heat recovery processes," *Thermal Science and Engineering Progress*, vol. 18, no. September 2019, p. 100516, 2020, doi: <https://doi.org/10.1016/j.tsep.2020.100516>.

- [16] K. kumar Sadasivuni *et al.*, "Ground water treatment using solar radiation-vaporization & condensation-techniques by solar desalination system," *International Journal of Ambient Energy*, vol. 43, no. 1, pp. 2868–2874, 2022, doi: <https://doi.org/10.1080/01430750.2020.1772872>.
- [17] S. Pakombong, "Efek Permukaan Berkain Pada Efisiensi Distilasi Air Energi Surya Jenis Baik," 2019.
- [18] D. Mugisidi *et al.*, "Iron Sand as a Heat Absorber to Enhance Performance of a Single-Basin Solar Still," *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*, vol. 70, no. 1, pp. 125–135, 2020, doi: [10.37934/arfmts.70.1.125135](https://doi.org/10.37934/arfmts.70.1.125135).
- [19] K. Liu, Z. Wang, C. Jin, F. Wang, and X. Lu, "An experimental study on thermal conductivity of iron ore sand cement mortar," *Constr Build Mater*, vol. 101, pp. 932–941, 2015, doi: [10.1016/j.conbuildmat.2015.10.108](https://doi.org/10.1016/j.conbuildmat.2015.10.108).
- [20] D. Mugisidi, R. S. Cahyani, O. Heriyani, D. Agusman, and Rifky, "Effect of Iron Sand in Single Basin Solar Still: Experimental Study," *IOP Conf Ser Earth Environ Sci*, vol. 268, no. 1, 2019, doi: [10.1088/1755-1315/268/1/012158](https://doi.org/10.1088/1755-1315/268/1/012158).
- [21] M. A. Kazemi, D. S. Nobes, and J. A. W. Elliott, "Experimental and Numerical Study of the Evaporation of Water at Low Pressures," *Langmuir*, vol. 33, no. 18, pp. 4578–4591, May 2017, doi: [10.1021/acs.langmuir.7b00616](https://doi.org/10.1021/acs.langmuir.7b00616).
- [22] J. Szilagyi, "On the thermodynamic foundations of the complementary relationship of evaporation," *J Hydrol (Amst)*, vol. 593, Feb. 2021, doi: [10.1016/j.jhydrol.2020.125916](https://doi.org/10.1016/j.jhydrol.2020.125916).
- [23] Z. A. Jaafar, H. G. Hameed, and R. H. Hussein, "Experimental Investigation of a Single Slope Solar Still Performance-Evaporation Process Enhancement," *IOP Conf Ser Mater Sci Eng*, vol. 928, no. 2, 2020, doi: <https://doi.org/10.1088/1757-899X/928/2/022096>.
- [24] E. Aprizki, M. Rokhmat, and D. Wibowo, "Analisis Pengaruh Kemiringan Sudut Atap Kaca Dan Penambahan Cermin Pada Alas Basin Terhadap Laju Penguapan Air Garam Dalam Destilator Tenaga Surya Destilator," vol. 5, no. 3, pp. 5594–5601, 2018.
- [25] T. Ding, Y. Zhou, W. L. Ong, and G. W. Ho, "Hybrid solar-driven interfacial evaporation systems: Beyond water production towards high solar energy utilization," *Materials Today*, vol. 42, no. xx, pp. 178–191, 2021, doi: <https://doi.org/10.1016/j.mattod.2020.10.022>.
- [26] C. Chen, Y. Kuang, and L. Hu, "Challenges and Opportunities for Solar Evaporation," *Joule*, vol. 3, no. 3, pp. 683–718, 2019, doi: <https://doi.org/10.1016/j.joule.2018.12.023>.
- [27] D. Mugisidi, B. Fajar, T. Utomo, and Syaiful, "The Effect of Water Surface Level in sensible heat material on Yield of Single Basin Solar Still: Experimental Study," *J Phys Conf Ser*, vol. 1373, no. 1, 2019, doi: [10.1088/1742-6596/1373/1/012014](https://doi.org/10.1088/1742-6596/1373/1/012014).
- [28] M. Feilizadeh, M. R. Karimi Estahbanati, A. Ahsan, K. Jafarpur, and A. Mersaghian, "Effects of water and basin depths in single basin solar stills: An experimental and theoretical study," *Energy Convers Manag*, vol. 122, pp. 174–181, 2016, doi: [10.1016/j.enconman.2016.05.048](https://doi.org/10.1016/j.enconman.2016.05.048).
- [29] M. S. K. Tarawneh, "Effect of Water Depth on the Performance Evaluation of Solar Still," *System*, vol. 1, no. 1, pp. 23–29, 2007.
- [30] A. K. Tiwari and G. N. Tiwari, "Effect of water depths on heat and mass transfer in a passive solar still: in summer climatic condition," *Desalination*, vol. 195, no. 1–3, pp. 78–94, 2006, doi: [10.1016/j.desal.2005.11.014](https://doi.org/10.1016/j.desal.2005.11.014).
- [31] A. E. Kabeel, S. W. Sharshir, G. B. Abdelaziz, M. A. Halim, and A. Swidan, "Improving performance of tubular solar still by controlling the water depth and cover cooling," *J Clean Prod*, vol. 233, pp. 848–856, 2019, doi: [10.1016/j.jclepro.2019.06.104](https://doi.org/10.1016/j.jclepro.2019.06.104).
- [32] J. Geng *et al.*, "Temperature and pressure effect on evaporation behavior of chloride salts using low pressure distillation," *Progress in Nuclear Energy*, vol. 147, p. 104212, 2022, doi: <https://doi.org/10.1016/j.pnucene.2022.104212>.

- [33] R. J. Speedy, P. G. Debenedetti, R. S. Smith, C. Huang, and B. D. Kay, "The evaporation rate, free energy, and entropy of amorphous water at 150 K," *Journal of Chemical Physics*, vol. 105, no. 1, pp. 240–244, 1996, doi: <https://doi.org/10.1063/1.471869>.
- [34] F. Fathinia, M. Khiadani, and Y. M. Al-Abdeli, "Experimental and mathematical investigations of spray angle and droplet sizes of a flash evaporation desalination system," *Powder Technol*, vol. 355, pp. 542–551, 2019, doi: <https://doi.org/10.1016/j.applthermaleng.2019.114385>.
- [35] C. Farnham, M. Nakao, M. Nishioka, M. Nabeshima, and T. Mizuno, "Effect of Water Temperature on Evaporation of Mist Sprayed From a Nozzle," *Journal of Heat Island Institute International*, vol. 10, p. 35, 2015.
- [36] J. P. Holman, *Heat Transfer*, 10th ed. 2010.
- [37] M. I. H. Khan, C. P. Batuwatta-Gamage, M. A. Karim, and Y. Gu, "Fundamental Understanding of Heat and Mass Transfer Processes for Physics-Informed Machine Learning-Based Drying Modelling," *Energies (Basel)*, 2022, doi: <https://doi.org/10.3390/en15249347>.
- [38] B. A. Mohamad, "Lecture Notes in Mass Transfer," no. January, 2022, doi: 10.13140/RG.2.2.21901.41440/4.
- [39] J. Benitez, *Principles and Modern Applications of Mass Transfer Operations second edition*, vol. 57, no. 11. 2011. doi: <https://doi.org/10.1002/aic.12641>.
- [40] H. Utami and Azhar, *Transfer Massa dan Panas*. Tekkim Publishing, 2017.
- [41] D. Rahmi. Utami, "Simulasi Model Perpindahan Panas Dan Massa Pada Proses Pengeringan Butiran Kedelai," *J Chem Inf Model*, vol. 53, no. 9, pp. 1689–1699, 2013.
- [42] D. Gruyter, "Chapter 3. Chemical processes and unit operations," *Chemical Reaction Technology*, pp. 67–102, 2022, doi: <https://doi.org/10.1515/9783110335443-005>.
- [43] N. Sorokova, V. Didur, and M. Variny, "Mathematical Modeling of Heat and Mass Transfer during Moisture – Heat Treatment of Castor Beans to Improve the Quality of Vegetable Oil," 2022, doi: <https://doi.org/10.3390/agriculture12091356>.
- [44] T. Waleign, E. Haile, T. Kebede, and A. Waleign, "Analytical study of heat and mass transfer in MHD flow of chemically reactive and thermally radiative Casson nanofluid over an inclined stretching cylinder," 2020, doi: <https://doi.org/10.1088/2399-6528/abcdba>.
- [45] D. Mugisidi, A. Rahman, O. Heriyani, and P. H. Gunawan, "Determination of the convective heat transfer constant (c and n) in a solar still," *Jurnal Teknosains*, vol. 11, no. 1, p. 1, 2021, doi: <https://doi.org/10.22146/teknosains.50908>.
- [46] A. H. Kamel, H. A. Afan, M. Sherif, A. N. Ahmed, and A. El-Shafie, "RBFNN versus GRNN modeling approach for sub-surface evaporation rate prediction in arid region," *Sustainable Computing: Informatics and Systems*, vol. 30, no. August 2020, p. 100514, 2021, doi: <https://doi.org/10.1016/j.chemosphere.2018.12.124>.
- [47] M. Invernizzi, A. Bellini, R. Miola, L. Capelli, V. Busini, and S. Sironi, "Assessment of the chemical-physical variables affecting the evaporation of organic compounds from aqueous solutions in a sampling wind tunnel," *Chemosphere*, vol. 220, pp. 353–361, 2019, doi: 10.1016/j.chemosphere.2018.12.124.
- [48] R. Tanggu, D. Pranata, P. Ambali, R. Rantetasak, and N. T. Saranga, "Tingkat Evaporasi di Kampus II Universitas Kristen Indonesia Toraja," *Journal Dynamic sainT*, vol. 6, no. 2, pp. 53–56, 2021.
- [49] P. J. Uno, "Plastic shrinkage cracking and evaporation formulas," *ACI Mater J*, vol. 95, no. 4, pp. 365–375, 1998, doi: <https://doi.org/10.14359/379>.
- [50] A. Y. Yuga and S. Kuncoro, "Modifikasi Rancang Bangun Kondensasi Uap Air Laut untuk Mendapatkan Air Murni," *Jurnal Agricultural Biosystem Engineering*, vol. 1, no. 4, 2022.



- [51] K. Zhang *et al.*, "Vegetation Greening and Climate Change Promote Multidecadal Rises of Global Land Evapotranspiration," *Sci Rep*, vol. 5, no. June, pp. 1–9, 2015, doi: <https://doi.org/10.1038/srep15956>.
- [52] C. Elango, N. Gunasekaran, and K. Sampathkumar, "Thermal models of solar still — A comprehensive review," *Renewable and Sustainable Energy Reviews*, vol. 47, pp. 856–911, 2015, doi: <https://doi.org/10.1016/j.rser.2015.03.054>.
- [53] Nurhayati, "Pengaruh Kecepatan Angin Terhadap Evapotranspirasi Berdasarkan Metode Penman Di Kebun Stroberi Purbalingga," *Elkawnie: Journal of Islamic Science and Technology*, vol. 2, no. 1, pp. 21–28, 2016.
- [54] D. Mugisidi, O. Heriyani, P. H. Gunawan, and D. Apriani, "Performance improvement of a forced draught cooling tower using a vortex generator," *CFD Letters*, vol. 13, no. 1, pp. 45–57, 2021, doi: [10.37934/cfdl.13.1.4557](https://doi.org/10.37934/cfdl.13.1.4557).
- [55] F. Gayuh and U. Dewi, "Pengaruh Kecepatan Dan Arah Aliran Udara Terhadap Kondisi Udara Dalam Ruang Pada Sistem Ventilasi Alami," vol. 3, no. 2, pp. 299–304, 2012.
- [56] W. B. Sulfemi and A. H. Lestari, "Korelasi kompetensi pedagogik guru dengan prestasi belajar mata pelajaran ips di smp muhammadiyah pamijahan kabupaten bogor," vol. 16, no. 106, pp. 1–17, 2017.
- [57] B. Majhi, D. Naidu, A. P. Mishra, and S. C. Satapathy, "Improved prediction of daily pan evaporation using Deep-LSTM model," *Neural Comput Appl*, vol. 32, no. 12, pp. 7823–7838, 2020, doi: <https://doi.org/10.1007/s00521-019-04127-7>.
- [58] J. P. Holman, *Experimental Methods for Engineers Eighth Edition*, Eighth. Mc-Graw Hill, 2011. [Online]. Available: [www.mhhe.com/holman](http://www.mhhe.com/holman)
- [59] A. Khamdila, S. Wilastari, and A. Saleh, "Menjaga Kestabilan Suhu Ruang Evaporator Berdampak Pada Hasil Produksi Air Tawar Fresh Water Generator," *Jurnal Sains Dan Teknologi Maritim*, vol. 19, no. 2, pp. 111–120, 2019, doi: <https://doi.org/10.33556/jstm.v19i2.200>.
- [60] A. Mardatila, "Mengenal Siklus Air Beserta Pengertian, Tahapan dan Urutannya," *merdeka.com*, Sumut, 2020.
- [61] L. Ahmad, R. H. Kanth, S. Parvaze, and S. S. Mahdi, *Experimental Agrometeorology : A Practical Manual*. Springer, Cham, 2017. doi: <https://doi.org/10.1007/978-3-319-69185-5>.
- [62] H. Davarzani, K. Smits, R. M. Tolene, and T. Illangasekare, "Study of the effect of wind speed on evaporation from soil through integrated modeling of atmospheric boundary layer and shallow subsurface Study of the effect of wind speed on evaporation from soil through integrated modeling of the atmospheric boundary," no. January, 2014, doi: <https://doi.org/10.1002/2013WR013952>.
- [63] A. H. As-syarif, Suwandi, and E. Rosdiana, "Effect Of Water Evaporation On Temperature And Air Moisture In A Room," vol. 8, no. 2, pp. 1844–1851, 2021.
- [64] Tamrin, Rivaldo, and Warji, "Performance of Seawater Steam Condenser to Gain Pure Water," *Jurnal Teknik Pertanian Lampung*, vol. 10, no. 4, pp. 425–431, 2021, doi: <https://doi.org/10.23960/jtep-l.v10i4.425-431>.

# Ristanto Wirangga - THE IMPACT OF WIND SPEED ON THE RATE OF WATER EVAPORATION IN A DESALINATION CHAMBER

## ORIGINALITY REPORT

19%

SIMILARITY INDEX

16%

INTERNET SOURCES

11%

PUBLICATIONS

5%

STUDENT PAPERS

## PRIMARY SOURCES

1	<a href="http://www.science.gov">www.science.gov</a> Internet Source	2%
2	<a href="http://journals.plos.org">journals.plos.org</a> Internet Source	2%
3	<a href="http://ir.library.osaka-u.ac.jp">ir.library.osaka-u.ac.jp</a> Internet Source	2%
4	<a href="http://ahtt.mit.edu">ahtt.mit.edu</a> Internet Source	1%
5	Submitted to St. Francis Preparatory High School Student Paper	1%
6	<a href="http://scitechdaily.com">scitechdaily.com</a> Internet Source	1%
7	<a href="http://worldwidescience.org">worldwidescience.org</a> Internet Source	1%
8	<a href="http://epdf.pub">epdf.pub</a> Internet Source	<1%

[link.springer.com](http://link.springer.com)

9

Internet Source

<1 %

10

Submitted to Universitas Hang Tuah Surabaya

Student Paper

<1 %

11

Submitted to Academic Library Consortium

Student Paper

<1 %

12

Submitted to Universitas Muhammadiyah

Sumatera Utara

Student Paper

<1 %

13

Masoud Sobhani, Hossein Ajam.

"Experimental performance evaluation of a novel design solar desalination device equipped with air stones", Desalination, 2022

Publication

<1 %

14

Stephen W. Roberts, Kenneth R. Knoerr. "

Estimates of Variable Plant Resistance to Water Flux in Ait. ", Plant Physiology, 1978

Publication

<1 %

15

Submitted to University of Sunderland

Student Paper

<1 %

16

Dan Mugisidi, Oktarina Heriyani, Zeinab S.

Abdel-Rehim, Hamdi Fathurohman. "The influence of container material conductivity to sea water evaporation", AIP Publishing, 2018

Publication

<1 %

17

Submitted to Sacred Heart University

Student Paper

<1 %

18

[dspace.lib.cranfield.ac.uk](https://dspace.lib.cranfield.ac.uk)

Internet Source

<1 %

19

[techscience.com](https://techscience.com)

Internet Source

<1 %

20

Submitted to 16504

Student Paper

<1 %

21

Abujazar, Mohammed Shadi S., S. Fatihah, A.R. Rakmi, and M.Z. Shahrom. "The effects of design parameters on productivity performance of a solar still for seawater desalination: A review", *Desalination*, 2016.

Publication

<1 %

22

Xi Meng, Li Meng, Yi Gao, Haoran Li. "A comprehensive review on the spray cooling system employed to improve the summer thermal environment: Application efficiency, impact factors, and performance improvement", *Building and Environment*, 2022

Publication

<1 %

23

[ndl.ethernet.edu.et](https://ndl.ethernet.edu.et)

Internet Source

<1 %

24

[www.researchgate.net](https://www.researchgate.net)

Internet Source

<1 %



25 Dimas Hanung Pamungkas, F. A. Rusdi Sambada. "Effects of water heating time on the efficiency of a wick-covered partition solar still", AIP Publishing, 2019

Publication

<1 %

26 pdfcoffee.com

Internet Source

<1 %

27 repository.itbwigalumajang.ac.id

Internet Source

<1 %

28 A.E. Kabeel, Mohamed Abdelgaied, K. Harby, Amr Eisa. "Augmentation of diurnal and nocturnal distillate of modified tubular solar still having copper tubes filled with PCM in the basin", Journal of Energy Storage, 2020

Publication

<1 %

29 Submitted to Cambridge High School

Student Paper

<1 %

30 Dinesh Mevada, Hitesh Panchal, Kishor Kumar Sadasivuni. "Investigation on evacuated tubes coupled solar still with condenser and fins: Experimental, exergo-economic and exergo-environment analysis", Case Studies in Thermal Engineering, 2021

Publication

<1 %

31 Hamed Majidian, Elshan Ahani, Lei Wang. "Aerodynamic study of pyramid stacking configuration on mega-sized container ships

<1 %

using CFD to optimize lateral drag", Applied Ocean Research, 2022

Publication

32

Mohammad Amin Kazemi, David S. Nobes, Janet A. W. Elliott. "Experimental and Numerical Study of the Evaporation of Water at Low Pressures", Langmuir, 2017

Publication

<1 %

33

Sivakumar, V., and E. Ganapathy Sundaram. "Assessment of convective heat transfer coefficient and mass of water evaporated from a single-slope passive solar still by different thermal models: an experimental validation", International Journal of Ambient Energy, 2016.

Publication

<1 %

34

Submitted to University of the Philippines Los Banos

Student Paper

<1 %

35

Vassilis Belessiotis, Soteris Kalogirou, Emmy Delyannis. "Indirect Solar Desalination (MSF, MED, MVC, TVC)", Elsevier BV, 2016

Publication

<1 %

36

[espace.aus.edu:8443](https://espace.aus.edu:8443)

Internet Source

<1 %

37

[jurnal.ugm.ac.id](http://jurnal.ugm.ac.id)

Internet Source

<1 %

38 mafiadoc.com <1 %  
Internet Source

---

39 teras.unimal.ac.id <1 %  
Internet Source

---

40 www.ijtrd.com <1 %  
Internet Source

---

41 Asaad H. Sayer, Hazim Al-Hussaini, Alasdair N. Campbell. "Experimental analysis of the temperature and concentration profiles in a salinity gradient solar pond with, and without a liquid cover to suppress evaporation", Solar Energy, 2017 <1 %  
Publication

---

42 Oktarina Heriyani, Mohammad Djaeni, Syaiful, Aldila Kurnia Putri. "Perforated concave rectangular winglet pair vortex generators enhance the heat transfer of air flowing through heated tubes inside a channel", Results in Engineering, 2022 <1 %  
Publication

---

Exclude quotes Off

Exclude matches Off

Exclude bibliography On