

Deskripsi Artikel

- Judul Jurnal : Jurnal Polimesin
- Volume Jurnal : Vol. 23, No. 2, April 2025
- Akreditasi : SINTA Peringkat 2
- Judul Artikel : Impact of Angle Cap and Water-Filled Blade Modification On The Output of Overshot Waterwheels
- Penulis : Rizki Afif Afandi, **Dan Mugisidi**, Giri Parwatmoko, Oktarina Heriyani.
- Status Penulis : Kontributor

Jurnal Polimesin

Disseminating information on the research of mechanical engineering.

Indexed: ICI, Accredited: Sinta 2

<http://e-jurnal.pnl.ac.id/polimesin>

Volume: 16, No. 2, August 2022

ISSN-p: 1693-5462, ISSN-e: 2549-1199

Department of mechanical engineering

Lhokseumawe State Polytechnic

Keywords: Aceh Coffee Brewing Process, CAD/ CAM, Thermal Energy, DOE, Level Control floating valve, Sink Faucet Solar Collector Design of Work Tool, Air Blower, SMAW, Friction Stir Welding Processing Step, microstructure



Akreditasi SINTA 2

<https://sinta.kemdikbud.go.id/journals/profile/3959>

SINTA

Author Subjects Affiliations Sources FAQ WCU Registration Login

**JURNAL POLIMESIN**
POLITEKNIK NEGERI LHOKEUMAWA
P-ISSN : 16935462 < E-ISSN : 25491199 Subject Area : Science, Engineering

0.748858
Impact

1103
Google Citations

Sinta 2
Current Accreditation

[Google Scholar](#) [Garuda](#) [Website](#) [Editor URL](#)

History Accreditation

2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029


Garuda Google Scholar

Taguchi-based optimization of sheeting machine parameters for improved production speed
Politeknik Negeri Lhokseumawe Jurnal Polimesin Vol 23, No 1 (2025): February 83-88
2025 DOI: 10.30811/jpl.v23i1.5612 Accred : Sinta 2

Get More with SINTA Insight

Go to Insight

Citation Per Year By Google Scholar

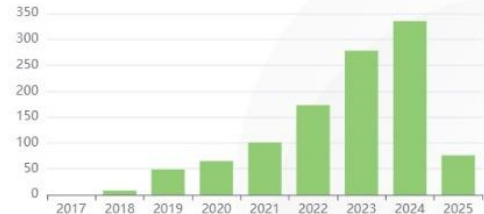

Year	Citation
2017	0
2018	50
2019	70
2020	100
2021	170
2022	280
2023	330
2024	340
2025	80

Journal By Google Scholar

	All	Since 2020
Citation	1103	1031
h-index	15	15
i10-index	26	26

Activate Windows
Go to Settings to activate Windows.

Editorial Team

<https://e-jurnal.pnl.ac.id/index.php/polimesin/about/editorialTeam>

The screenshot shows the 'Editorial Team' page of the Polimesin journal. The page has a blue header and a white main content area. On the right side, there is a vertical navigation menu with links: Publication Ethics, Open Access Policy, Online Submission, Peer Review Process, Author Fees, Abstracting & Indexing, and a section for 'COLLABORATED WITH PDRI' featuring the PDRI logo and 'MoU Jurnal Polimesin-PDRI'. Below this, it says 'Supported by: iJIRELAWAN JURNAL INDONESIA'. The main content area lists the Editor in Chief (A. Jannifar), Managing Editor (Azwinur), and Associate Editors (Rahadian Nopriantoko, Mr. Lasinta Ari Nendra Wibawa, Dr. Omer A. Alawi, Prof. Dr. Iskandar Hasanuddin, Dr. Irwin Syahri Cebro, Dr. Samsul Bahri, Syukran Syukran, Muhammad Akil, Alex Taufiqurrohman Zain, Amir Zaki Mubarak, Riki Effendi, and Dr. Faisal Muhammad Nur). It also lists the Advisory International Editorial Boards (Prof. Dr-ing. Yupiter HP Manurung and Prof. Dr. Ir. Wahyu Kuntjoro). The bottom of the page shows a Windows taskbar with the date 06/05/2023.

Home > About the Journal > Editorial Team

Editorial Team

Editor in Chief
A. Jannifar, PhD, Politeknik Negeri Lhokseumawe, Scopus Author ID: 55123253500, Indonesia

Managing Editor
Azwinur Azwinur, Politeknik Negeri Lhokseumawe, Scopus Author ID: 57209408481, Indonesia

Associate Editors
Rahadian Nopriantoko, Universitas Krisnadwipayana, Indonesia
Mr. Lasinta Ari Nendra Wibawa, Badan Riset dan Inovasi Nasional (BRIN) Scopus ID: 57217102709 Sinta ID: 6670715, Indonesia
Dr. Omer A. Alawi, Universiti Teknologi Malaysia, Scopus ID: 56108584300, Malaysia
Prof. Dr. Iskandar Hasanuddin, Mechanical and Industrial Engineering Department, Universitas Syiah Kuala, Darussalam, Banda Aceh, Indonesia, Author Scopus ID: 57203218451, Indonesia
Dr. Irwin Syahri Cebro, Politeknik Negeri Lhokseumawe, Author Scopus ID: 57203138585, Indonesia
Dr. Samsul Bahri, Politeknik Negeri Lhokseumawe, Scopus Author ID: 57203144032, Indonesia
Syukran Syukran, Politeknik Negeri Lhokseumawe, ID Scopus: 55995422000, API-IWS, Indonesia
Muhammad Akil, Universitas Negeri Makassar, Author Scopus ID: 57346145400, Indonesia
Alex Taufiqurrohman Zain, Politeknik Negeri Jember, Author Scopus ID: 57222958035, Indonesia
Amir Zaki Mubarak, Syiah Kuala University, Scopus Author ID: 57190937549
Riki Effendi, University of Muhammadiyah Jakarta, Scopus Author ID: 57223930959, Indonesia
Dr. Faisal Muhammad Nur, Universitas Malikussaleh, Scopus Author ID: 57201065285, Indonesia
Zulkifli Zulkifli, Politeknik Negeri Balikpapan, Indonesia

Advisory International Editorial Boards
Prof. Dr-ing. Yupiter HP Manurung, Universiti Teknologi MARA, Scopus Author ID=36768369500, Malaysia
Prof. Dr. Ir. Wahyu Kuntjoro, Universiti Teknologi Mara, Scopus Author ID=26429710100, Malaysia

Publication Ethics
Open Access Policy
Online Submission
Peer Review Process
Author Fees
Abstracting & Indexing

COLLABORATED WITH PDRI:

MoU Jurnal Polimesin-PDRI

Supported by :
iJIRELAWAN JURNAL INDONESIA

ARTICLE TEMPLATE

Daftar Isi

<https://e-jurnal.pnl.ac.id/polimesin/issue/view/480>

The screenshot shows the 'Daftar Isi' (Table of Contents) page for Volume 23, No 2 (2025) of the Journal Polimesin. The page has a blue header with the journal's logo and name. Below the header, there is a navigation menu with links: HOME, ABOUT, LOGIN, SEARCH, CURRENT, ARCHIVES, ANNOUNCEMENTS, FOCUS & SCOPE, EDITORS, REVIEWERS, REGISTER, and GUIDELINE. The main content area lists the table of contents for the issue, including the title 'Fabrication and characterization of antioxidant biodegradable plastic from mangrove starch, chitosan, and clove essential oil' and 'Material selection for coal flow breaker plate based on fatigue life analysis using finite element method'. The right side of the page features a vertical navigation menu with links: Publication Ethics, Open Access Policy, Online Submission, Peer Review Process, Author Fees, Abstracting & Indexing, and a section for 'COLLABORATED WITH PDRI' featuring the PDRI logo and 'MoU Jurnal Polimesin-PDRI'. The bottom of the page shows a Windows taskbar with the date 06/05/2023.

Vol 23, No 2 (2025)

Jurnal Polimesin

Disseminating information on the research of mechanical engineering
Index: ICI, SINTA 2, Google Scholar ISSN Online: 2549-1199, ISSN Print: 1693-5462
Department of Mechanical Engineering, Lhokseumawe State Polytechnic, Lhokseumawe 24301, Indonesia

HOME ABOUT LOGIN SEARCH CURRENT ARCHIVES ANNOUNCEMENTS FOCUS & SCOPE EDITORS REVIEWERS REGISTER GUIDELINE

Home > Archives > Vol 23, No 2 (2025)

Vol 23, No 2 (2025)

April

DOI: <http://dx.doi.org/10.30811/jpl.v23i2>

Table of Contents

Fabrication and characterization of antioxidant biodegradable plastic from mangrove starch, chitosan, and clove essential oil	PDF 134-141
DOI: 10.30811/jpl.v23i2.6394 Abstract views : 238 times Check in Scholar	
Syaubari Syaubari, Jimmy Dawood, Muhammad Zaki, Dandi Bachtiar	
Material selection for coal flow breaker plate based on fatigue life analysis using finite element method	PDF 142-146
DOI: 10.30811/jpl.v23i2.5407 Abstract views : 87 times Check in Scholar	
Acepnu Lubis, Kianus Abdul Hadi, Iamiatul Akmal, Mohammad Badaruddin	

Publication Ethics
Open Access Policy
Online Submission
Peer Review Process
Author Fees
Abstracting & Indexing

COLLABORATED WITH PDRI:

MoU Jurnal Polimesin-PDRI

Bukti Korespondensi

- Judul Jurnal : Jurnal Polimesin
- Volume Jurnal : Vol. 23, No. 2, April 2025
- Akreditasi : SINTA Peringkat 2
- Judul Artikel : Impact of Angle Cap and Water-Filled Blade Modification On The Output of Overshot Waterwheels
- Penulis : Rizki Afif Afandi, **Dan Mugisidi**, Giri Parwatmoko, Oktarina Heriyani.
- Status Penulis : Kontributor



Jurnal Polimesin

Disseminating information on the research of mechanical engineering

Index: ICI, SINTA 2, Google Scholar ISSN Online: 2549-1199, ISSN Print: 1693-5462

Department of Mechanical Engineering, Lhokseumawe State Polytechnic, Lhokseumawe 24301, Indonesia

[HOME](#) [ABOUT](#) [USER HOME](#) [SEARCH](#) [CURRENT](#) [ARCHIVES](#) [ANNOUNCEMENTS](#) [FOCUS & SCOPE](#) [EDITORS](#) [REVIEWERS](#) [REGISTER](#) [GUIDELINE](#)

[Home](#) > [User](#) > [Author](#) > [Submissions](#) > #6543 > **Summary**

#6543 Summary

SUMMARY REVIEW EDITING

Submission

Authors	Rizki Afif Afandi, Dan Mugisidi, Giri Parwatmoko, Oktarina Heriyani
Title	Impact of angle cap and water-filled blade modification on the output of overshot waterwheels
Original file	6543-18927-2-SM.DOCX 2025-02-26
Supp. files	None
Submitter	Afif Rizki Afif Afandi
Date submitted	February 26, 2025 - 04:53 PM
Section	
Editor	Irwin Cebro
Author comments	Konversi Energi
Abstract Views	16

Status

Status	Published Vol 23, No 2 (2025): April
Initiated	2025-04-30
Last modified	2025-05-03

[Publication Ethics](#)

[Open Access Policy](#)

[Online Submission](#)

[Peer Review Process](#)

[Author Fees](#)

[Abstracting & Indexing](#)

COLLABORATED WITH PDRI;



MoU Jurnal Polimesin-PDRI

Supported by :



Submission Metadata

Authors

Name Rizki Afif Afandi 
Affiliation University Muhammadiyah Prof Dr Hamka
Country Indonesia
Bio Statement Student of Mechanical Engineering Department, Faculty of Industrial Technology and Informatics, Universitas Muhammadiyah Prof.Dr.Hamka

Name Dan Mugisidi 
URL https://scholar.google.co.id/citations?user=twv_DEEAAAAJ&hl=en
Affiliation University Muhammadiyah Prof Dr Hamka
Country Indonesia
Bio Statement Lecturer in Mechanical Engineering, Faculty of Industrial Technology and Informatics, Universitas Muhammadiyah Prof.Dr.Hamka

Principal contact for editorial correspondence.

Name Giri Parwاتمoko 
Affiliation University Muhammadiyah Prof Dr Hamka
Country Indonesia
Bio Statement Student of Mechanical Engineering Department, Faculty of Industrial Technology and Informatics, Universitas Muhammadiyah Prof.Dr.Hamka

Name Oktarina Heriyani 
URL <https://scholar.google.com/citations?hl=id&user=vAlciPQAAAAJ>
Affiliation University Muhammadiyah Prof Dr Hamka
Country Indonesia
Bio Statement Lecturer in Mechanical Engineering, Faculty of Industrial Technology and Informatics, Universitas Muhammadiyah Prof.Dr.Hamka

Title and Abstract

Title Impact of angle cap and water-filled blade modification on the output of overshot waterwheels
Abstract The utilization of water resources as renewable energy through waterwheels presents an environmentally friendly alternative, however, its efficiency requires improvement through technological modification. This research investigates two design modifications: a 45° Angle Cap (AC) and a Water-Filled Angle Cap (WFAC), in comparison with a waterwheel without a Cap (WC). Experiments were conducted at discharges from 1 to 10 m³/h with a constant torque load of 0.05 N-m. The highest



ARTICLE TEMPLATE



ISSN

P-ISSN: 1693-5462 ; E-ISSN: 2549-1199



USER

You are logged in as...
afifafandi
» My Journals
» My Profile
» Log Out

JOURNAL CONTENT

Search

Search Scope

Browse

» Browse

efficiency of 57.08% was achieved in the AC 45° configuration at 1 m³/h, generating 1.09 watts of power, while the Wfac 45° yielded the highest power output of 2.88 watts at 10 m³/h with an efficiency of 14.50%. Although increasing discharge generally led to higher power input, it was accompanied by a decrease in efficiency across all configurations. Among all three variations, Wfac 45° demonstrated superior performance at higher discharges, indicating its potential for enhancing the power and efficiency of overshot waterwheels.

Indexing

Keywords Waterwheel, renewable energy, rotational kinetic energy, moment of inertia, efficiency
Language en

Supporting Agencies

Agencies The authors express their sincere gratitude to the Renewable Energy Research Team, Faculty of Industrial Technology and Informatics, Universitas Muhammadiyah Prof. Dr. Hamka, for the financial support provided for this research.

References

References

[1] R. A. Febriansyar, T. Riyanto, dan I. Istadi, "Analysis of CaCO3 Impregnation on HY Zeolite Surface Area, Pore Size, and Activity in the Catalytic Cracking of Palm Oil to Biofuels," *Teknik*, vol. 43, no. 1, hal. 78–86, 2022, doi: 10.14710/teknik.v43i1.44579 Copyright.

[2] T. C. Lee, M. K. Anser, A. A. Nassani, M. Haffar, K. Zaman, dan M. M. Q. Abro, "Managing natural resources through sustainable environmental actions: A cross-sectional study of 138 countries," *Sustain.*, vol. 13, no. 22, hal. 2–19, 2021.

[3] R. D. Syahrial, R. Soenoko, T. D. Widodo, dan A. Sunarso, "Pengaruh Tinggi Celah Aliran Pada Sluice Gate Terhadap Kinerja Kincir Air Jenis Sudu Melengkung," *J. Rekayasa Mesin*, vol. 14, no. 1, hal. 97–103, 2023.

[4] D. Mugisidi, I. N. Fauzi, O. Heriyani, Y. Djeli, E. Aidhilhan, dan P. H. Gunawan, "Development of the Dethridge Wheel Blade Shape for Hydropower Generation in Irrigation Canals in Indonesia," *J. Adv. Res. Fluid Mech. Therm. Sci.*, vol. 98, no. 2, hal. 146–156, 2022.

[5] Y. D. Herlambang, G. Suwoto, B. M. Hermawan, F. G. Sumarno, P. Negeri, dan P. N. Semarang, "Micro Hydro Power Plant (MHP) performance using breast-shot waterwheel with different electrical load to improve efficiency," *Disseminating Inf. Res. Mech. Eng. Polimesin*, vol. 22, no. 3, hal. 278–283, 2024.

[6] L. N. Rahayu dan J. Windarta, "Tinjauan Potensi dan Kebijakan Pengembangan PLTA dan PLTMH di Indonesia," *J. Energi Baru dan Terbarukan*, vol. 3, no. 2, hal. 88–98, 2022.

[7] A. Rahman Hafiz, A. Nuramal, dan N. Iman Supardi, "Analisi Produksi Listrik di Pembangkit Listrik Tenaga Minihidro (PLTM) Analysis of Electricity Production in Mini Hydro Power Plants (PLTM)," *Rekayasa Mek.*, vol. 6, no. 1, hal. 15–21, 2022.

[8] Y. Dewantoro Herlambang, G. Suwoto, B. Mei Hermawan, dan F. Gatot Sumarno, "The effect of variations in electric load on the performance of a 3 kW Micro Hydro Power Plant using an undershot

- » By Issue
- » By Author
- » By Title
- » Other Journals

INFORMATION

- » For Readers
- » For Authors
- » For Librarians

KEYWORDS

3D printing : Oil Treatment, Motor bensin, Viskositas, Aditif. Arc PlasmaDeposition, Copper Deposited, Laboratory-Scale Prototype, Thin FilmCoating, CAD/CAE DOE Direct Tensile Load, TIG welding,Automobile body repair, Gas flow rate, Taguchi method. Espresso Coffee, Semi-Automatic System, Pressure, Temperature, Grind Size FDM Fiberboard composites Hydrogen concentration, Hydrogen gas, MQ-8 gas sensor, Water electrolysis process Hydrogen, Electrolysis, Efficiency, Seawater, Photovoltaic, Titanium Jaloe kayoh, hybrid composite, ramie-Eglass fiber, drop-weight impact testing. OWSC, BEM, hydrodynamics, renewable energy, floating body. Optimization PLA Shore D Titanium Tobacco Leaves, refrigeration system, PLC, SCADA coconut fiber corn cob helical gears, failure analysis, finite element method.

Web Traffic Analysis

Visitors		See
	160,560	 2,945
	137,276	 2,231
	87,636	 2,176

- waterwheel," Disseminating Inf. Res. Mech. Eng. Polimesin, vol. 21, no. 2, hal. 214–218, 2023.
- [9] R. Dyaa Sudiro, L. Halim, dan B. Made Arthaya, "Implementasi Dan Pengujian Prototipe Turbin Jenis Propeller Untuk Pembangkit Listrik Tenaga Mikrohidro," J. Rekayasa Mesin, vol. 15, no. 2, hal. 919–936, 2024.
- [10] E. Quaranta dan R. Revelli, "Gravity water wheels as a micro hydropower energy source: A review based on historic data, design methods, efficiencies and modern optimizations," Renew. Sustain. Energy Rev., vol. 97, hal. 414–427, 2018.
- [11] M. H. Kurniawan, A. Eksperimental, P. Performa..., dan K. K. Ayuningtiyas, "Analisis Eksperimental Pengaruh Performa Aliran Natural (Tanpa Pengarah) dan Penggunaan Nozzle Pada Kincir Air Jenis Breastshot," Indones. J. Eng. Technol., vol. 5, no. 1, hal. 2623–2464, 2022.
- [12] K.-L. Weng, F.-C. C. Chen, dan Y.-H. Lee, "Application Of Water Energy System To Balance Energy And Environment In The Whole World," IEEE Eurasia Conf. IOT, Communication Eng., hal. 21–23, 2019.
- [13] E. Quaranta dan R. Revelli, "Performance Optimization of Overshot Water Wheels at High Rotational Speeds for Hydropower Applications," J. Hydraul. Eng., vol. 146, no. 9, hal. 1–5, 2020.
- [14] A. Agato, A. sunarso Sunarso, N. Narsih, D. S. Domi, dan D. Iswanda, "Optimasi Unjuk Kerja Kincir Air Undershot," J. Rekayasa Mesin, vol. 14, no. 1, hal. 251–260, 2023.
- [15] H. Putra Prabawa, D. Mugisidi, M. Yusuf D, dan O. Heriyani, "Pengaruh Variasi Ukuran Diameter Nozzle Terhadap Daya Dan Efisiensi Kincir Air Sudu Datar," in Jurnal UMJ, 2016, hal. 1–8.
- [16] Warjito, D. Adanta, Budiarmo, dan A. P. Prakoso, "The effect of bucketnumber on breastshot waterwheel performance," in IOP Conference Series: Earth and Environmental Science, Jan 2018, hal. 1–7.
- [17] F. J. Sánchez-Jiménez dan J. A. González, "Watermills: The origin of the use of renewable hydraulic energy in Spain," Ind. Archaeol. Rev., vol. 40, no. 1, hal. 2–10, 2018.
- [18] I. Gunawan Widodo, A. Sunarso, H. Sihombing, dan D. Sulistiono, "Pengaruh Kedalaman Pencelupan Sudu Kincir Terhadap Unjuk Kerja Kincir Air," J. Rekayasa Mesin, vol. 13, no. 2, hal. 62–66, 2018.
- [19] M. H. Nguyen, H. Jeong, dan C. Yang, "A study on flow fields and performance of water wheel turbine using experimental and numerical analyses," Sci. China Technol. Sci., vol. 61, no. 3, hal. 464–474, 2018.
- [20] E. Quaranta dan R. Revelli, "Hydraulic Behavior and Performance of Breastshot Water Wheels for Different Numbers of Blades," J. Hydraul. Eng., vol. 143, no. 1, hal. 1–10, Jan 2017.
- [21] D. Mugisidi, O. Heriyani, R. A. Luhung, dan M. R. D. Andrian, "Utilization of the dethridge wheel as a low head power generator and loss analysis," in MATEC Web of Conferences, 2018, hal. 1–6.
- [22] Agato, Deendarlianto, Indarto, dan A. Sunarso, "Simulasi Numerik Aliran Fluida Pada Kincir Air Menggunakan Metode Sliding Mesh Interface," J. Rekayasa Mesin, vol. 15, no. 2, hal. 955–966, 2023.
- [23] M. Castro-García, J. I. Rojas-Sola, dan E. De La Morena-de La Fuente, "Technical and functional analysis of Albolafia waterwheel (Cordoba, Spain): 3D modeling, computational-fluid dynamics simulation and finite-element analysis," Energy Convers. Manag., vol. 92, hal. 207–214, 2015, doi: 10.1016/j.enconman.2014.12.047.
- [24] S. D. Boedi, A. N. Mekel, dan A. Maidangkay, "Rancang Bangun Turbin Kinetik Sudu Berengsel Luar Sebagai Pembangkit Listrik Skala Pikohidro," Otopro, vol. 17, no. 2, hal. 69–75, 2022.
- [25] N. Mandal dan G. Rajita, "An accurate technique of measurement of flow rate using rotameter as a primary sensor and an improved op-amp based network," Flow Meas. Instrum., vol. 58, hal. 38–45, 2017.
- [26] M. B. Damdhani, B. Jayarajah, Budiarmo, Warjito, dan D. Adanta, "Investigation of the 16 blades pie

	28,897		1,577		562
	11,669		1,486		534
	10,983		1,434		451
	10,670		1,250		451
	9,946		972		391
	9,366		966		381
	6,911		816		361



00726149

Web Traffic Analysis

WRITING TOOLS



Mendeley Citation.pdf



JOURNAL HELP

- [26] W. R. Ramdhanii, R. Ilwansyah, Budiarso, Wajito, dan D. Awanita, "Investigation of the 10 blades pico scale breastshot waterwheel performance in actual river condition," J. Adv. Res. Fluid Mech. Therm. Sci., vol. 75, no. 1, hal. 38–47, 2020.
- [27] J. Štigler, "Overshot water wheel efficiency measurements for low heads and low flowrates," EPJ Web Conf., vol. 269, hal. 01058, 2022.
- [28] M. F. Basar, I. A. Zulkarnain, K. Sopian, dan N. A. Mohd Rais, "Investigations on the performance of bottle blade overshot water wheel in very low head resources for pico hydropower," Energy Harvest. Syst., vol. 11, no. 1, hal. 2–10, 2024.
- [29] Z. Nurfadilah, D. Mugisidi, A. Rahman, S. Pohan, dan O. Heriyani, "Pengaruh Kincir Tertutup Terhadap Efisiensi dan Rugi-rugi," Rekayasa Energi Manufaktur) J. |, vol. 8, no. 1, hal. 2528–3723, 2023.
- [30] E. Quaranta dan R. Revelli, "Output power and power losses estimation for an overshot water wheel," Renew. Energy, vol. 83, hal. 979–987, 2015.
- [31] M. Darwis, "Analisis Pengaruh Pembukaan Katup Terhadap Kinerja Turbin Air," J. P4I, vol. 3, no. 4, hal. 365–376, 2023.
- [32] Marinus S, Hiendro A, dan Yandri, "Studi Aplikatif Roda Gila (FLYWHEEL) Pada Pembangkit Listrik Tenaga Mikrohidro (PLTMH)," J. Elektr. Eng. Energy Inf. Teknol., vol. 7, no. 1, hal. 1–9, 2019.
- [33] A. Digdoyo, F. Rahmasari, A. Budi Djatmiko, E. Yuniaty, dan D. Saepul Anwar, "Rancang Bangun Alat Uji Momen Inersia Massa Suatu Elemen Mesin dalam Tiga Arah Sumbu," J. Ilm. Rekayasa Dan Inov., vol. 4, no. 2, hal. 193–200, 2022.
- [34] M. F. Basar, N. A. M. Rais, A. A. Rahman, W. A. Mustafa, K. Sopian, dan K. V. Wong, "Optimization of Reaction Typed Water Turbine in Very Low Head Water Resources for Pico Hydro," J. Adv. Res. Fluid Mech. Therm. Sci., vol. 90, no. 1, hal. 23–39, 2022.
- [35] D. Iswanda, R. Soenoko, W. Winarto, dan A. Sunarso, "Pengaruh Besar Sudut Butterfly Guide terhadap Unjuk Kerja Kincir Air," J. Rekayasa Mesin, vol. 12, no. 3, hal. 653–661, Des 2021, doi: 10.21776/ub.jrm.2021.012.03.15.
- [36] I. Wayan, B. Saputra, dan A. I. Weking, "Rancang Bangun Pemodelan Pembangkit Listrik Tenaga Mikro Hidro (PLTMH) Menggunakan Kincir Overshot Wheel," Teknol. Elektro, vol. 16, no. 02, 2017.
- [37] T. Harismandri, J. Teknik Mesin, F. Teknik Universitas Riau Kampus Binawidya Km, dan S. Baru Panam, "PENGUJIAN PRESTASI KINCIR AIR TIPE OVERSHOT DI IRIGASI KAMPUS UNIVERSITAS RIAU DENGAN PENSTOCK BERVARIASI," 2017.
- [38] J. Štigler, "Overshot water wheel efficiency measurements for low heads and low flowrates," EPJ Web Conf., vol. 269, hal. 01058, 2022.

ABSTRACTING & INDEXING BY:





Ciptaan disebarluaskan di bawah Lisensi Creative Commons Atribusi-BerbagiSerupa 4.0 Internasional .

Alamat Surat :

Politeknik Negeri Lhokseumawe

Jl. Banda Aceh-Medan Km 280

Buketrata, Lhokseumawe, 24301, Aceh, Indonesia



Jurnal Polimesin

Disseminating information on the research of mechanical engineering

Index: ICI, SINTA 2, Google Scholar ISSN Online: 2549-1199, ISSN Print: 1693-5462

Department of Mechanical Engineering, Lhokseumawe State Polytechnic, Lhokseumawe 24301, Indonesia

[HOME](#) [ABOUT](#) [USER HOME](#) [SEARCH](#) [CURRENT](#) [ARCHIVES](#) [ANNOUNCEMENTS](#) [FOCUS & SCOPE](#) [EDITORS](#) [REVIEWERS](#) [REGISTER](#) [GUIDELINE](#)

[Home](#) > [User](#) > [Author](#) > [Submissions](#) > #6543 > **Review**

#6543 Review

[SUMMARY](#)

[REVIEW](#)

[EDITING](#)

Submission

Authors Rizki Afif Afandi, Dan Mugisidi, Giri Parwatmoko, Oktarina Heriyani 

Title Impact of angle cap and water-filled blade modification on the output of overshoot waterwheels

Section

Editor Irwin Cebro 

Peer Review

Round 1

Review Version 6543-18932-2-RV.DOCX 2025-02-27

Initiated 2025-02-27

Last modified 2025-04-13

Uploaded file Reviewer A 6543-19145-1-RV.DOCX 2025-03-07
Reviewer B 6543-19633-1-RV.DOCX 2025-04-13

Editor Decision

[Publication Ethics](#)

[Open Access Policy](#)

[Online Submission](#)

[Peer Review Process](#)

[Author Fees](#)

[Abstracting & Indexing](#)

COLLABORATED WITH PDRI;



MoU Jurnal Polimesin-PDRI

Supported by :



Decision

Accept Submission 2025-04-23

Notify Editor

 Editor/Author Email Record  No Comments

Editor Version

6543-18965-1-ED.DOCX 2025-02-27

Author Version

6543-19738-1-ED.DOCX 2025-04-21 [DELETE](#)6543-19738-2-ED.DOCX 2025-04-21 [DELETE](#)

Upload Author Version

[Choose File](#)

No file chosen

[Upload](#)

ABSTRACTING & INDEXING BY:



Ciptaan disebarluaskan di bawah Lisensi Creative Commons Atribusi-BerbagiSerupa 4.0 Internasional .

Alamat Surat :

Politeknik Negeri Lhokseumawe

Jl. Banda Aceh-Medan Km 280

Buketrata, Lhokseumawe, 24301, Aceh, Indonesia

ARTICLE TEMPLATE



ISSN

P-ISSN: 1693-5462 ; E-ISSN: 2549-1199



USER

You are logged in as...

afifafandi

- » My Journals
- » My Profile
- » Log Out

JOURNAL CONTENT

Search

Search Scope

[Search](#)

Browse

[All Issues](#)

- » By Issue
- » By Author
- » By Title
- » Other Journals

INFORMATION

- » For Readers
- » For Authors
- » For Librarians

KEYWORDS

3D printing : Oil Treatment, Motor bensin, Viskositas, Aditif. Arc PlasmaDeposition, Copper Deposited, Laboratory-Scale Prototype, Thin FilmCoating. CAD/CAE DOE Direct Tensile Load, TIG welding,Automobile body repair, Gas flow rate, Taguchi method. Espresso Coffee, Semi-Automatic System, Pressure, Temperature, Grind Size FDM Fiberboard composites Hydrogen concentration, Hydrogen gas, MQ-8 gas sensor, Water electrolysis process Hydrogen, Electrolysis, Efficiency, Seawater, Photovoltaic, Titanium Jaloe kayoh, hybrid composite, ramie-Eglass fiber, drop-weight impact testing. OWSC, BEM, hydrodynamics, renewable energy, floating body. Optimization PLA Shore D Titanium Tobacco Leaves, refrigeration system, PLC, SCADA coconut fiber corn cob helical gears, failure analysis, finite element method.

Web Traffic Analysis

Visitors		See
	160,560	 2,945
	137,276	 2,231
	87,636	 2,176
		 745
		 685
		 574

	28,897		1,577		562
	11,669		1,486		534
	10,983		1,434		451
	10,670		1,250		451
	9,946		972		391
	9,366		966		381
	6,911		816		361



00726147

Web Traffic Analysis

WRITING TOOLS



Mendeley Citation.pdf



[JOURNAL HELP](#)



Jurnal Polimesin

Disseminating information on the research of mechanical engineering
Index: ICI, SINTA 2, Google Scholar ISSN Online: 2549-1199, ISSN Print: 1693-5462
Department of Mechanical Engineering, Lhokseumawe State Polytechnic, Lhokseumawe 24301, Indonesia

HOME ABOUT USER HOME SEARCH CURRENT ARCHIVES ANNOUNCEMENTS FOCUS & SCOPE EDITORS REVIEWERS REGISTER GUIDELINE

Home > User > Author > Submissions > #6543 > **Editing**

#6543 Editing

SUMMARY REVIEW **EDITING**

Submission

Authors Rizki Afif Afandi, Dan Mugisidi, Giri Parwاتمoko, Oktarina Heriyani

Title Impact of angle cap and water-filled blade modification on the output of overshoot waterwheels

Section

Editor Irwin Cebro

Copyediting

COPYEDIT INSTRUCTIONS

Copyeditor Ilham Jaya

REVIEW METADATA

	REQUEST	UNDERWAY	COMPLETE
1. Initial Copyedit	2025-04-21	2025-04-25	2025-04-25
File: 6543-19741-2-CE.DOCX 2025-04-25			
2. Author Copyedit	2025-04-25	2025-04-25	2025-04-26
File: 6543-19790-1-CE.DOCX 2025-04-26			
Choose File No file chosen Upload			

Publication Ethics

Open Access Policy

Online Submission

Peer Review Process

Author Fees

Abstracting & Indexing

COLLABORATED WITH PDRI;



MoU Jurnal Polimesin-PDRI

Supported by :



3.	Final Copyedit	2025-04-26	2025-04-27	2025-04-27
File: 6543-19805-1-CE.DOCX 2025-04-27				
Copyedit Comments No Comments				

Layout

Layout Editor		Mr Misran Misran			
Layout Version		REQUEST	UNDERWAY	COMPLETE	VIEWS
6543-19806-1-LE.DOCX 2025-04-27		2025-04-27	2025-04-27	2025-04-30	
Galley Format		FILE			
1.	PDF VIEW PROOF	6543-20089-1-PB.PDF	2025-05-01		7
Supplementary Files		FILE			
		None			
Layout Comments		No Comments			

Proofreading

Proofreader		Dr. Dinni Agustina		
REVIEW METADATA				
		REQUEST	UNDERWAY	COMPLETE
1.	Author	2025-04-27	2025-04-27	 2025-04-30
2.	Proofreader	2025-04-30	2025-04-30	2025-04-30
3.	Layout Editor	2025-04-30	2025-04-30	2025-04-30
Proofreading Corrections		 2025-05-01	PROOFING INSTRUCTIONS	

ABSTRACTING & INDEXING BY:



ARTICLE TEMPLATE



ISSN

P-ISSN: 1693-5462 ; E-ISSN: 2549-1199



USER

You are logged in as...
afifafandi
» My Journals
» My Profile
» Log Out

JOURNAL CONTENT

Search

Search Scope

All

Search

Browse
» By Issue



GARUDA
GARBA RUJUKAN DIGITAL



Ciptaan disebarluaskan di bawah Lisensi Creative Commons Atribusi-BerbagiSerupa 4.0 Internasional .

Alamat Surat :

Politeknik Negeri Lhokseumawe

Jl. Banda Aceh-Medan Km 280

Buketrata, Lhokseumawe, 24301, Aceh, Indonesia

- » By Issue
- » By Author
- » By Title
- » Other Journals

INFORMATION

- » For Readers
- » For Authors
- » For Librarians

KEYWORDS

3D printing : Oil Treatment, Motor bensin, Viskositas, Aditif. Arc Plasma Deposition, Copper Deposited, Laboratory-Scale Prototype, Thin Film Coating, CAD/CAE DOE Direct Tensile Load, TIG welding, Automobile body repair, Gas flow rate, Taguchi method. Espresso Coffee, Semi-Automatic System, Pressure, Temperature, Grind Size **FDM** Fiberboard composites Hydrogen concentration, Hydrogen gas, MQ-8 gas sensor, Water electrolysis process Hydrogen, Electrolysis, Efficiency, Seawater, Photovoltaic, Titanium Jaloe kayoh, hybrid composite, ramie-Eglass fiber, drop-weight impact testing. OWSC, BEM, hydrodynamics, renewable energy, floating body. Optimization PLA Shore D Titanium Tobacco Leaves, refrigeration system, PLC, SCADA coconut fiber corn cob helical gears, failure analysis, finite element method.

Web Traffic Analysis

Visitors

			See
	160,560		2,945
	137,276		2,231
	87,636		2,176
			741
			681

	28,897		1,577		561
	11,669		1,486		534
	10,983		1,434		451
	10,670		1,250		451
	9,946		972		391
	9,366		966		381
	6,911		816		361



00726148

Web Traffic Analysis

WRITING TOOLS



Mendeley Citation.pdf



[JOURNAL HELP](#)

GUIDE FOR REVIEWER & AUTHOR **for the reviewer**

1. Please fill out the comment column in the Table of Comment-Response and fill in a related page number of the comment.
2. If manuscripts lack a chapter, let's place the comments in the relevant sections, such as introduction, method, result, and discussion, which are distinct components.
3. If any (Not necessary), in addition to the table, the reviewer could utilize the “review” and activated “track change” menu of Microsoft Word on the ribbon to mark and comment on the manuscript. The reviewer might use a **yellow** highlighter in the manuscript (not in the Comment-Response table) to distinguish it from the author's revision highlight color later.
4. Please freely add list numbers according to the number of reviewer comments by a “table row insertion”, in the MS. Word menu.
5. If the reviewer preliminary thinks the manuscript tends to be declined It should not be reviewed in detail. A reviewer might go straight into the “FINAL REVIEW” section of the table, and it is the right place to put a notice about the declination reasons shortly.
6. The author's response must be left blank.

for the author

1. The reviewer's comment must be responded to by one of 3 kinds of responses: 1. acknowledgment, 2. revision, or 3. rebuttal. The 1st one, acknowledgment is given when the reviewer praises any part of the manuscript. On the 2nd one, when a revised part has been completed, the revised page in the manuscript must be mentioned in the author's response separately related to the reviewer’s focused part of writing. The last one, please provide a thorough explanation to refute the author's strong positions on their original work in some areas. Fill in the revised page number in the manuscript pages.
2. The color of the **turquoise** highlight (not in the Comment-Response table) must be used to draw attention to any revised part in the manuscript.

3. Download a based file for revision as in the **green** square, nor the **red** one or something else. The **red** one is only an informational file forwarded by the editor to the author, once a reviewer finishes their task. The author needs to wait for a decision (blue square) by the editor before conducting any revision, to avoid unnecessary revision because of a declination or resubmission.

Peer Review

Round 1

Review Version	6166-17731-2-RV.DOC	2024-12-15
Initiated	2024-12-15	
Last modified	2025-01-03	
Uploaded file	Reviewer A 6166-18007-1-RV.DOCX 2024-12-30 Reviewer B 6166-18102-1-RV.DOC 2025-01-03	

Editor Decision

Decision	Revisions Required	2025-01-07
Notify Editor	Editor/Author Email Record	2025-01-07
Editor Version	6166-17863-1-ED.DOC 2024-12-15	
Author Version	None	
Upload Author Version	Choose File No file chosen Upload	

4. Upload this author-revised “Editor Version” file as a completed with all reviewer comments, related author responses, and intended revised manuscript.
5. Without an appropriate and comprehensive response, the author might be asked by the editor to revise their 1st revision. So, they need to submit the 2nd round revision. In the worst scenario, the author might decide to review for resubmitting.
6. Complying with all instructions will expedite the processing of your manuscript.

TABLE of COMMENT-RESPONSE

Reviewer's A comments		Page	Author's Response		Page
TITLE					
1.	Replace the dash (-) characters!	1	Thank you for your valuable suggestion. I agree with your comment to replace the hyphen character (-). The title has been revised to: “The impact of angle cap and water filled blade innovations on the efficiency and power of overshot waterwheel.”	1	
2.	Repair the title; the title should be in line with purposes and conclusion; the title close to performance test of...	1	Thank you for your valuable suggestion. I agree with your comment that the title should match the objective and conclusion. The title has been revised to: “The impact of angle cap and water filled blade innovations on the efficiency and power of overshot waterwheel.”	1	
ABSTRACT					
1.	State the innovation in question directly!	1	Thank you for your valuable suggestions. I agree with your comment to mention the innovation directly. I have revised the abstract to mention the innovation directly in sentence 2: “The innovation in this study is the 45° water-filled angle cap which is included in the research variables that aim to determine the power performance and performance efficiency of the waterwheel”	1	

2.	The sentence in method is odd; replace or repair with effective sentence!	1	Thank you for your valuable suggestions. I agree with your comment for the replacement of the abstract effective sentence in sentence 3: The revised text is as follows: “Experiments were conducted using 1 waterwheel applied to three variable conditions: without cap, 45° angle cap and, 45° water-filled angle cap. Tests were carried out with a variation of discharge 1-10 m³/h (interval 0.5 m³/h) and torque 0.05 N-m.”	1
INTRODUCTION				
1.	Rewrite the paragraph to be effective sentences	1	Thank you for your valuable suggestion. I agree with your comment to rewrite paragraphs into effective sentences. Revised paragraph 1 starting from sentence 2 to finish using effective sentences: “Indonesia is one of the developing countries that has abundant renewable natural resources and one of them is water [1]. Water as a renewable natural energy has great potential to be converted from kinetic energy into electrical energy [4]. Hydropower plants are designed to generate electricity on a large scale, while small-scale plants are known as Micro hydro Power Plants (MHP) [5], [6], [7]. MHP utilises the flow of rivers or other water sources to generate electricity on a sustainable basis, meeting the needs of residential, agricultural and community facilities [8], [9], [10].” And Revise paragraph 3 sentence 7, the first sentence of this objective should be in line with the title: “Therefore, this study aims to determine the performance of the power generated by the wheel and the efficiency of the wheel's performance, by comparing a straight blade water wheel with a water wheel that has a blade cover to direct water in, as well as a wheel that contains water in the blade.”	1
2.	Make sure the writing is correct; do proof reading whole document	1	Thank you for your valuable suggestion. I have reconfirmed that the writing is correct and have re-read it: There are improvements in the first paragraph to improve the sentence into an effective sentence. and improvement in the 3 paragraph, sentence 7, the purpose is in accordance with the title.	1
METHOD				
1.	Rewrite the method carefully	1	Thank you for your valuable suggestion. Have rechecked the handwriting on the method there is a correction in the first paragraph of sentence 4. Corrected the writing of Figure 1, Torque and caption using english. Correction of decimal numbers. The revised text is as follows: “The cap that forms a 45° angle on the blades serves to expand the area outside the blades, so that the water flow is concentrated in the blade area to achieve maximum rotation.”	1

2.	This research aims to calculate or measure efficiency but does not write the formula		Thank you for your valuable suggestion. The revised text is as follows: The efficiency formula is written in equation 4 after equation 3 of the waterwheel power formula (P_{out}).	1-3
RESULT & DISCUSSION				
1.	Rewrite carefully; what is discussed must be delivered in the introduction and written down in the formulation in the method and all of that leads to the research objectives	6	Thank you for your valuable advice. I agree with your comments. Table 4 is my addition to try to compare the efficiency of waterwheel performance in previous studies. I agree to provide a discussion in the introduction section. I have added the discussion of efficiency material in the 3rd paragraph of the 2nd sentence in the introduction chapter. I agree to provide the calculation formula and discussion. I have provided the efficiency formula in the methods chapter in equation 4.	6
2.	Rewrite into effective sentences (accurate on word and punctuation (. and,), and consistent; i.e. 81/2 with 8.5)	4	Thank you for your valuable advice. I agree with your comments to rewrite into effective sentences (precise on words and punctuation (. and,), and consistent; i.e. 81/2 with 8.5) I have revised the results and discussion section of the first paragraph as follows: 'After obtaining torque and rotation data for each discharge variation. Calculation of water power, waterwheel power, and overshot waterwheel efficiency using equations 1, 3, and 4.' I have made revisions to consistently specify 8.5 for all decimals.	4
CONCLUSION				
1.	Write the research results briefly referring to the research objectives	6-7	Thank you for your valuable suggestion. I agree with your comment to complete the conclusion by referring to the research objectives. The revised conclusions are as follows: "The waterwheel with a 45° angle cap (AC 45°) shows better rotation performance at a discharge of 10 m ³ /h which is 48.56 rpm, the variable water fill angle cap (WFAC 45°) is 47.47 rpm and the variable waterwheel without a cap (WC) is 41.47 rpm weaker because the flow of water directly falling down is not maximally concentrated on the blade of the waterwheel. In addition, in producing waterwheel power with a discharge of 10 m ³ /h. The variable without a cap (WC) produces a waterwheel power of 2.29 W, the 45° angle cap variable (AC 45°) produces a waterwheel power of 2.85 W and the 45° water-filled angle cap variable (WFAC 45°) produces a waterwheel power of 2.88 W higher than the without a cap and 45° angle cap. The addition of load by filling water on the waterwheel can increase the moment of inertia and affect the increase in rotational kinetic energy which results in an increase in wheel power. As for the efficiency of waterwheel performance at a discharge of 10 m ³ /h. The efficiency of the waterwheel performance on the variable without	6-7

			a cap is 11, 50%, the variable angle cap 45° is 14, 32% and the 45° water-filled angle cap variable is 14, 50% higher than the variable without a cap and angle cap 45°. The variable water-filled angle cap (WFAC 45°) with the provision of water on the closed blade gives the best results in terms of waterwheel power and waterwheel performance efficiency at a discharge of 10 m ³ /h. Further research is recommended to use a higher water discharge than this study in order to obtain more maximum waterwheel power and waterwheel performance efficiency in overshot waterwheels.	
2.	Remove unnecessary sentences!	6	Thank you for your valuable suggestion.	6
CITED LITERATURE				
1.	Rewrite accurately in English to this journal format!	7-8	Thank you for your valuable suggestion. To write the reference is in accordance with the journal using English. There are references from national journals where the titles use Indonesian, and there are also international journals whose titles are already in English. So that in writing there are writing references using Indonesian and English.	7-8
2.				
FINAL REVIEW				
Major revision				

TABLE of COMMENT-RESPONSE

Reviewer's B comments		Page	Author's Response	Page
TITLE				
1.	Don't use dash in the title	1	Thank you for your valuable suggestion. I agree with your comment not to use hyphens in the title. The title has been revised to: "Impact of angle cap and water filled blade innovations on the efficiency and power of overshot waterwheel."	1
2.				
ABSTRACT				
1.	Good	1	Thank you for your positive feedback. I am glad to know that the abstract I wrote is good and in accordance with the research I conducted.	1
2.				
INTRODUCTION				
1.	There are some words that are still written in Indonesian	1	Thank you for your valuable suggestions. I have made the corrections that still use Indonesian sentences into English.	1
2.				
METHOD				

1.	The method should be accompanied by a flow diagram.	2	Thank you for your valuable suggestions. I agree with your comment that the study is accompanied by a flow chart. I have made revisions by providing additional research flow charts, I placed them in the methods chapter section in figure 2. I have completed figure 4, by providing additional image information for the location of the overshot waterwheel research data collection.	2
2.				
RESULT & DISCUSSION				
1.	The results obtained should be compared with other studies.	6	Thank you for your valuable advice. I agree with your comment that the results obtained should be compared with other studies. I have made revisions to provide a comparison of the results of the research data with previous studies. I revised the comparison table and provided a brief description below the 4 table.	6
2.				
CONCLUSION				
1.	Conclusions should be made concisely and clearly	6-7	Thank you for your valuable suggestion. I agree with your comment conclusion should be made concisely and clearly.	6-7
2.				
CITED LITERATURE				
1.	Ok	8	Thank you for the approval. The reference section has been corrected and we have ensured that it conforms to the prescribed format.	8
2.				
FINAL REVIEW				
Minor revisions				

The impact of angle cap and water filled blade innovations on the efficiency and power of overshot waterwheel.

Abstract

The utilisation of water resources as renewable energy through waterwheels is an environmentally friendly alternative, but its efficiency still needs to be improved through technological innovation. The innovation in this study is (WFAC 45) which is included in the research variables to determine the power performance and efficiency of the waterwheel performance. The experiment used 1 waterwheel applied to three variable conditions, namely (WC, AC 45° and WFAC 45°. Tests were carried out with a variation of discharge 1-10 m³/h (interval 0.5 m³/h) and torque 0.05 N-m. The results showed that the maximum efficiency of 23.30% occurred in the variable (WC) with a discharge of 2 m³/hr producing 0.89 watts of power; meanwhile, 57.08% efficiency was achieved in the variable (AC 45°) at a discharge of 1 m³/hr capable of producing 1.09 watts of power; and 37.53% efficiency was achieved in the variable (WFAC 45°) at a discharge of 1.5 m³/hr producing 1.07 watts of power. Although an increase in discharge generally tends to increase the power generated by the waterwheel, it results in a decrease in efficiency across the tested variables. On the other hand, the water-filled angle cap variable (WFAC 45°) showed superiority in producing the highest power at a discharge of 10 m³/h, which was 2.88 watts resulting in an efficiency of 14.50%, compared to the angle cap variation (WC 45°) which was only able to produce 2.85 watts of power with an efficiency of 14.32%.

Keywords

Waterwheel, Renewable energy, Rotational kinetic energy, Moment of inertia, Efficiency.

Introduction

Sustainable utilisation of natural resources is one of the central issues in the global effort to deal with climate change and environmental degradation [1], [2], including Indonesia. Indonesia is one of the developing countries that has abundant renewable natural resources and one of them is water [3]. Water as a renewable natural energy has great potential to be converted from kinetic energy into electrical energy [4]. Hydropower plants are designed to generate electricity on a large scale, while small-scale plants are known as Micro hydro Power Plants (MHP) [5], [6], [7]. MHP utilizes the flow of rivers or other water sources to generate electricity in a sustainable manner to meet the needs of housing, agriculture, and community facilities [8], [9], [10].

The utilization of water as a renewable energy source requires a waterwheel that plays an important role in converting kinetic energy from water flow into other forms of energy and is usually converted into electrical energy through a generator that operates without reducing the volume of water [11], [12]. In this context, waterwheels were chosen because they are more environmentally friendly and cost-effective [13]. Waterwheels have 3 types including overshot, breastshot, and undershot waterwheels. [14]. In an overshot waterwheel, water flows from the top of the wheel and spins it as it falls to a lower surface. In a breastshot waterwheel, water flows over the center of the waterwheel which is positioned parallel to the top [15]. Meanwhile, in an undershot waterwheel, the waterwheel is placed slightly above the water flow so that only the

bottom part of the waterwheel enters the water. The difference between the three types of waterwheels lies in the type of energy transferred to the waterwheel which affects the efficiency and the exact conditions of use of each waterwheel. [16], [17].

Various studies have been conducted on waterwheels, including the effect of adding angled caps, blade thickness on flat-bladed waterwheels, and the relationship between blade height and power and efficiency [18], [19]. The efficiency of waterwheels is influenced by a variety of factors, including aspects of the geometry of the wheel, such as diameter size, number of blades and their curved shape, as well as operational factors such as water level (head), flow discharge, load torque, and water flow position [20], [21]. In order to achieve high efficiency, more in-depth research is needed related to these factors with experimental methods under field conditions [22]. Previous research shows that the shape of the waterwheel blades is very important, because a certain shape makes it easier for water to enter between the blades and is one of the causes of the rotation of the wheel. In addition, the moment of inertia of the waterwheel is also an important factor that affects the efficiency and stability of the waterwheel [23]. Although research on waterwheels has been going on for a long time, until now no waterwheel has been equipped with a director to force water to enter between the blades, even though this has the potential to increase the power generated. Another attempt that has not yet been made is to introduce water into the waterwheel to increase its moment of inertia.

Therefore, this study aims to determine the performance of the power generated by the wheel and the efficiency of the wheel's performance, by comparing a straight blade water wheel with a water wheel that has a blade cover to direct water in, as well as a wheel that contains water in the blade.

Method

The waterwheel used in the study is an overshot waterwheel with 16 blades. There are 2 models of blade caps, namely closed water-filled and 45° angled caps to the outside as shown in Figure 1. The closed water-filled blades aim to produce a moment of inertia and increase the kinetic energy of the wheel. The cap that forms a 45° angle on the blades serves to expand the area outside the blades, so that the water flow is concentrated in the blade area to achieve maximum rotation.

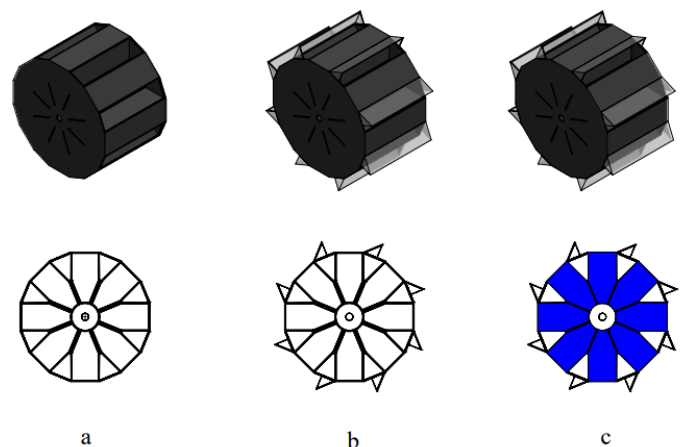


Fig 1. a) Isometric and Side View (WC) Without Cap b) Isometric and Side View (AC 45°) Angle Cap c) Isometric and Side View (WFAC 45°) Water-filled Angle Cap

The test method applied in the overshot waterwheel research is the actual experimental method on a laboratory scale. The test was carried out in the Mechanical Engineering laboratory of University Prof. Dr Hamka Muhammadiyah. Tests were carried out


Tachometer measuring instrument [24]. Water discharge settings using Rotameter measuring instrument and water flow rate measured using Flow velocity meter tool [25], according to the specifications listed in table 1 below:

Measurement tool	Type	Capacity
Torque meter	Lutron TQ-8800	0 - 0.15 (N-m)
Tachometer	KW06-563	0 - 20.000 (rpm)
Rotameter	LZT-50S105/N	1 - 10 m ³ /h)
Flow velocity meter	Flowatch FL-03	2 - 150 (km/h)

Fig 2. Flowchart of Overshot Waterwheel Research Systematic

The design of the overshot waterwheel involved design, cutting, welding, and testing. The manufacture of the waterwheel housing uses melamine multiplex material, with the inside coated with resin and the outside coated with waterproof paint. The wheel house is 100 cm high, 100 cm long, and 37 cm wide. The lid is made of acrylic material with a 45° tilt angle. Meanwhile, the wheel is made of iron material with a thickness of 3 mm.

The wheel mounting frame plays a role in supporting the pillow block to support the wheel shaft, ensuring optimal wheel rotation. The waterwheel shaft is solid with a diameter of 25 mm, while the waterwheel has a diameter of 45 cm and a thickness of 30 cm. The geometry design of the overshot waterwheel in millimetres (mm) is shown in Figure 3 below:

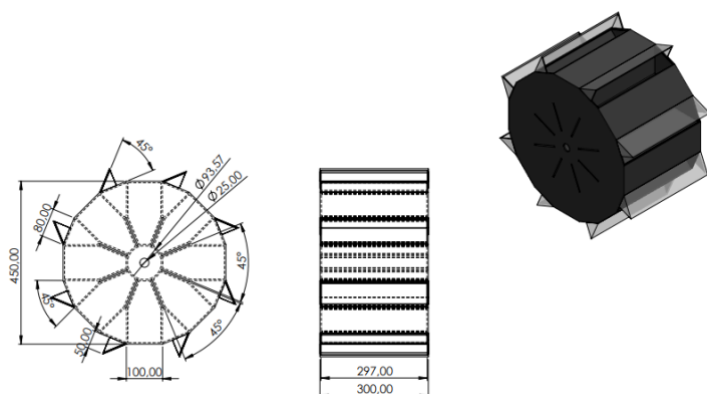

The diagram illustrates a water flow measurement system. At the bottom right, a red electric motor (1) drives a pump assembly (2). Water flows from the pump through a horizontal pipe (3) containing a rotameter mounting frame (13) with a rotameter (7). The pipe continues left, passing through a torque meter (9), a tachometer (10), and a flow meter (8). It then turns upwards through a guttering (6) and a pinwheel shaft (11) into a large orange water trough (17). A vertical pipe (16) rises from the trough, passing through a pillow block (12) and a water wheel (5) mounted on a water wheel mounting frame (4). The pipe continues up to a water pump (1) at the top. Blue arrows indicate the direction of water flow throughout the system.

Description :

- Water pump.
- Waterwheel mounting frame.
- Waterwheel house.
- Acrilic.
- Waterwheel.
- Guttering.
- Pillow Block.
- Pinwheel shaft.
- Torque Meter.
- Tachometer.
- Flow Meter.
- Rotameter.
- Rotameter mounting frame.
- Water toren mounting frame.
- 2 inch pipe.
- 3 inch pipe.
- Water trough.

The installation scheme of the overshoot waterwheel test consists of 17 components, each of which plays a crucial role with different functions, starting from the water pump in charge of maintaining the continuity of water flow through the pipe from the waterwheel house, forwarded to the water trough according to the design shown in Figure 4. The water trough, which acts as the main reservoir, is designed to facilitate the precise regulation of water discharge, which is done with the help of a rotameter gauge to control the flow of water into the gutter. The gutter acts as a guide, concentrating the water flow precisely on the 45° tilt angle of the blades, ensuring an even distribution of water across the surface of the blades. The blade's main function is to maximise the efficiency of the waterwheel rotation by adjusting its rotation rate to the volume and velocity of the incoming water flow, which ultimately determines the overall performance of the waterwheel. As a control and reference in this test, the detailed specifications of the waterwheel are presented in Table 2 below, providing a clear guide to the technical parameters tested.

2

Table 2. Waterwheel specifications.

Spesifikasi	Parameter
Weight of Waterwheel Without Cap (WC)	41 kg
Weight of Waterwheel Angle Cap (AC 45°)	42.5 kg
Weight of Waterwheel Water-filled Angle Cap (WFAC 45°)	60 kg
Toque	0.05 N-m

The precision-designed components of the waterwheel are then assembled into a highly complex and interconnected circuit, where each element contributes to the functionality of the entire system. The artificial waterways, whose continuity is supported by the use of pumps, serve to maintain a steady and controlled flow of water, which in turn allows for high accuracy testing of the efficiency of the waterwheel. The overall result of the waterwheel assembly, which incorporates various aspects of technical design and construction, can be seen in Figure 5 below.

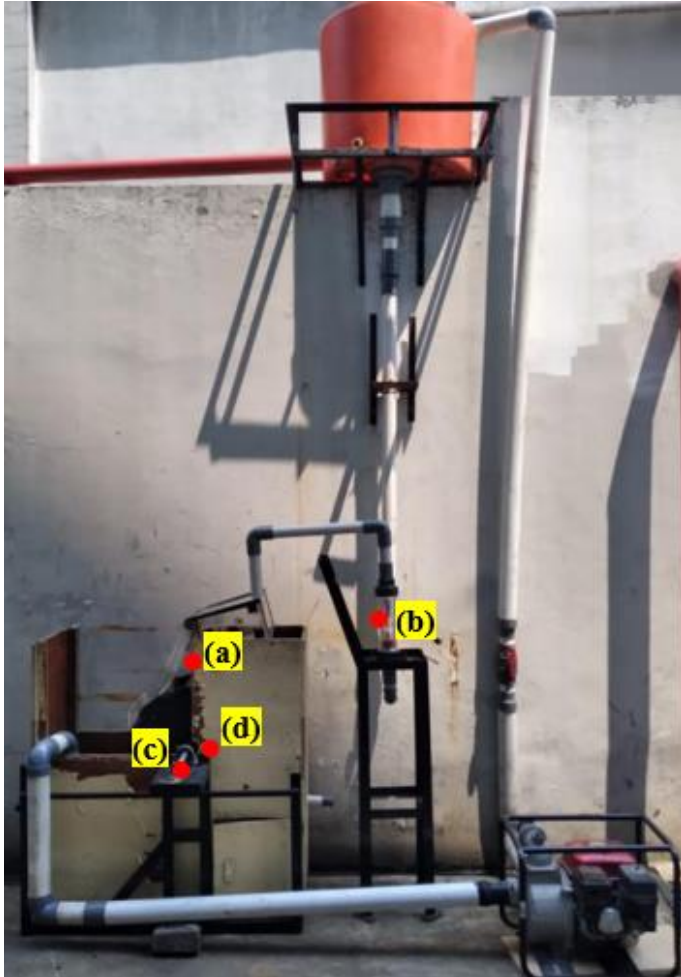


Fig 5. The assembled overshoot waterwheel installation and data collection location. (a) Water flow velocity data, (b) Water discharge data, (c) Waterwheel torque data, (d) Waterwheel rotation data

Experimental results were processed to determine the efficiency of the waterwheel. Energy from water can be obtained through water flowing into the blades of the waterwheel. The power generated by the water (P_{in}) can be calculated using the equation 1 [26].

$$P_{in} = \rho \cdot g \cdot h \cdot Q \quad (1)$$

Description:

P_{in}	= Water power	(watt)
ρ	= Density of water	(998,2 kg/m ³)
g	= Gravitational acceleration	(m/s ²)
h	= Water fall height	(m)
Q	= Water discharge	(m ³ /h)

Where head is the height difference between the surface of the base of the waterwheel housing and the height of the water surface before entering the waterwheel blades [27]. The circumferential speed of the wheel or commonly known as angular velocity (ω) is obtained from equation 2 [28]. Meanwhile, to calculate the waterwheel power (P_{out}) using the equation 3 [29].

$$\omega = \frac{2 \cdot \pi \cdot n}{60} \quad (2)$$

$$P_{out} = T \cdot \omega \quad (3)$$

Description:

ω	= Angular velocity	(rad/s)
n	= Waterwheel rotation	(rpm)
T	= Torque	(N-m)

The efficiency of the waterwheel (η) is the ratio between the power generated by the waterwheel and the water power, which can be calculated using equation 4 [30].

$$\eta = \frac{P_{out}}{P_{in}} \times 100\% \quad (4)$$

The rotation of a solid body with mass (m) moving translational (linear) with velocity (v) using equation 5 can be explained through kinetic energy according to equation 6 [31].

$$v = \omega \cdot r \quad (5)$$

$$Ek = \frac{1}{2} \cdot m \cdot v^2 \quad (6)$$

Description:

Ek	= Kinetic Energy	(Joule)
v	= Water flow velocity	(m/s ²)

It is assumed that the kinetic energy measured in a solid cylinder results in rotational kinetic energy (Ek_{rot}) which is related to the moment of inertia (I) and can be obtained through equation 7 [32].

$$Ek_{rot} = \frac{1}{2} \cdot I \cdot \omega^2 \quad (7)$$

Description:

$E_{k_{rot}}$ = Rotational kinetic energy (Joule)

I = Moment of inertia ($kg.m^2$)

ω = Angular velocity (rad/s)

Moment of inertia (I) is the property of an object that allows it to maintain its position in rotational motion [33]. A stationary object tends to maintain its position, so a moving object will try to maintain its rotational motion. Mathematically, the moment of inertia can be obtained from equation 8.

$$I = m.r^2 \quad (8)$$

Description:

I = Moment of inertia ($kg.m^2$)

m = Mass of the wheel (kg)

r = Distance of the waterwheel to the shaft (m)

Results and Discussion

After obtaining torque and rotation data for each discharge variation. Calculation of water power, waterwheel power, and overshot waterwheel efficiency using equations 1, 3, and 4. The results of testing and data processing are presented in the form of tables and figures that show the relationship between these factors. The complete results of data processing can be seen in Table 3

Table 3. Data processing results of variable waterwheel WC, AC 45°, WFCC 45°

Q (m^3/h)	n (rpm)			P_{in} (watt)			P_{out} (watt)			efficiency (%)		
	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°	WC	AC 45°	WFA C 45°
1	7.41	19.62	8.95	1.91	1.91	1.91	0.41	1.09	0.51	21.70	57.08	26.55
1,5	11.96	25.66	18.31	2.86	2.86	2.86	0.66	1.43	1.07	23.21	50.09	37.53
2	16.22	30.02	19.91	3.82	3.82	3.82	0.89	1.70	1.21	23.30	44.50	31.69
2,5	19.41	34.12	24.96	4.68	4.68	4.68	1.05	1.88	1.41	22.02	39.46	29.60
3	21.62	37.33	28.46	5.72	5.72	5.72	1.22	2.01	1.64	21.37	35.07	28.64
3,5	23.70	38.27	30.13	6.68	6.68	6.68	1.32	2.22	1.68	19.70	33.21	25.21
4	25.06	40.50	32.29	7.63	7.63	7.63	1.41	2.26	1.94	18.45	29.64	25.38
4,5	26.28	41.55	33.43	8.58	8.58	8.58	1.46	2.29	1.94	16.99	26.70	22.57
5	28.12	42.34	34.90	9.54	9.54	9.54	1.55	2.35	2.01	16.26	24.64	21.07
5,5	28.66	42.77	36.21	10.49	10.49	10.49	1.56	2.42	2.01	14.88	23.05	19.16
6	29.75	43.38	37.39	11.77	11.77	11.77	1.66	2.36	2.23	14.11	20.07	18.96
6,5	31.95	43.96	38.42	12.75	12.75	12.75	1.74	2.30	2.21	13.64	18.05	17.35
7	33.11	44.13	39.06	13.73	13.73	13.73	1.80	2.43	2.32	13.13	17.72	16.88
7,5	34.20	45.06	39.67	14.72	14.72	14.72	1.91	2.52	2.20	12.98	17.10	14.96
8	36.04	45.86	40.58	15.70	15.70	15.70	1.95	2.67	2.35	12.42	17.03	14.98
8,5	36.68	46.51	41.68	16.68	16.68	16.68	2.09	2.63	2.37	12.52	15.77	14.22
9	38.99	46.87	42.59	17.90	17.90	17.90	2.14	2.60	2.51	11.94	14.53	14.03
9,5	39.91	47.30	44.73	18.90	18.90	18.90	2.24	2.68	2.58	11.87	14.15	13.63
10	41.47	48.56	47.47	19.89	19.89	19.89	2.29	2.85	2.88	11.50	14.32	14.50

The rotation of the waterwheel is influenced by the water flow using equation 6 and the head of the waterwheel. At the discharge position of 1-5.5 m^3/h , the head value was recorded at 0.7 m, while at the discharge of 6-8.5 m^3/h , the head value increased by 0.02 m, and reached its peak at the discharge of 9 to 10 m^3/h with a head value of 0.73 m. This increase in head is caused by the increase in water flow in the gutter of the waterwheel. The increase in head is caused by the increase in the flow of water flowing in the gutter of the waterwheel. The waterwheel without the corner cap experiences an obstacle, where the water flow cannot hit the entire blade optimally. As a result, the water flow that enters the blades is focused in the middle and goes straight down to the bottom of the wheel, so it cannot maximise the water flow and causes a small rotation.

On the other hand, the waterwheel with a 45° angle cap shows a larger rotation than the waterwheel without a cap, because the angle cap reduces the opening area of the waterwheel. This causes the flow of water into the blade of the waterwheel not to come out immediately, due to obstruction by the waterwheel cover, so that the water can be concentrated effectively towards the blade of the waterwheel.

Meanwhile, the wheel equipped with a corner cap and filled with water experiences a moment of inertia that causes inertia in the rotation of the wheel to be smaller when the discharge is in the range of 1 to 4 m^3/h . However, the rotation began to increase at a discharge of 4 to 10 m^3/h due to the work of the moment of inertia helping to increase the kinetic energy of the waterwheel rotation, where at a discharge of 10 $m^3/hour$, the rotation of the waterwheel

experienced a significant increase compared to the waterwheel using a 45° angle cap without water content. The following figure shows the comparison of the processed data.

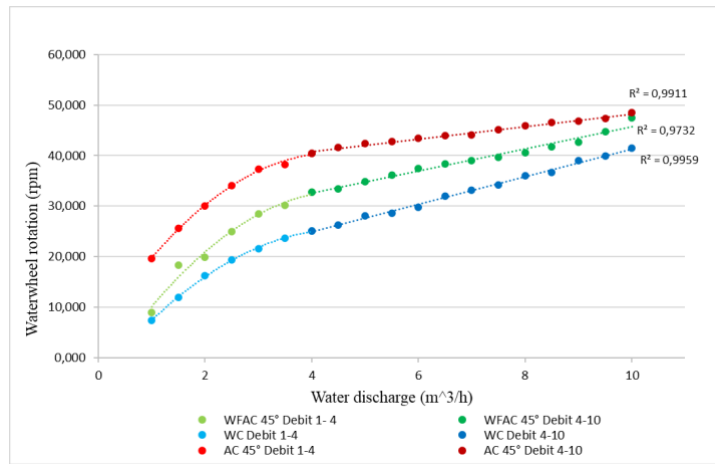


Fig. 5. Waterwheel rotation (rpm)

Figure 5 shows the relationship between water discharge (m^3/h) on the horizontal axis and wheel speed (rpm) on the vertical axis. In this figure, there are three turbine configurations, namely AC 45°, WC, and WFAC 45°, with each tested at two water discharge ranges: 1-4 m^3/h and 4-10 m^3/h .

The 45° AC variable waterwheel represents a polynomial curve at small discharge (1-4 m^3/h), where the rotation of the waterwheel increases gradually from 19.62 rpm to reach 40.50 rpm. The increase in rotation is due to the angle cap which reduces the opening area of the waterwheel so that the water does not fall directly to the bottom of the waterwheel house, resulting in a moment of inertia with the calculation of equation 9 of 2.152 kg/m^2 and generating rotational kinetic energy of 12.249 Joules using the calculation of equation 8. At large discharges (4-10 m^3/h) shows a more stable and linear increase, where the rotation of the waterwheel increases from 40.50 rpm to reach about 48.56 rpm. There is an increase in rotational kinetic energy of 23.386 Joules. The R^2 value is 0.9911, indicating that the 45° angle cap greatly influences the rotation of the waterwheel.

The 45° WFAC variable wheel represents a polynomial curve at small discharge, where the rotation of the wheel experiences inertia due to the water content of the wheel blades causing the rotation to slow down in contrast to the 45° AC. The rotation starts from about 8.95 rpm and increases to 32.29 rpm. In the increase in rotation there is a moment of inertia of 3.087 kg/m^2 resulting in rotational kinetic energy of 9.242 Joules, with a slower increase when compared to the AC 45° waterwheel. At large discharge, the rotation of the waterwheel increased linearly from 32.29 rpm to 47.47 rpm showing a stable relationship between water discharge and waterwheel rotation. The curve also has a high fit to the data, indicated by the R^2 value of 0.9732. In the no-water-fill condition, with the same water discharge of 9-10 m^3/h , the rotation of the waterwheel recorded a continuous increase, which was 46.87 rpm, 47.30 rpm, and 48.56 rpm. A significant increase in the rotation of the 45° water fill angle cap began to be seen at a discharge of 9-10 m^3/hour , respectively 42.59 rpm, 44.73 rpm, and 47.47 rpm and produced rotational kinetic energy of 25.946 Joules. Where water filling produces an increase in rotational kinetic energy, it causes a significant increase in wheel rotation. If the discharge continues the possibility is greater than with AC 45° which increases continuously. This is because the rotational kinetic energy is directly proportional to the square of the rotation speed at large discharge, although the difference in rotation is still visible.

The WC variable wheel showed a polynomial curve configuration at small discharge, with the wheel rotation starting

from about 7.41 rpm and increasing up to 25.06 rpm. The moment of inertia value of 2.076 kg/m^2 produced 3.653 Joules less rotational kinetic energy compared to AC 45° and WFAC 45°, but still had a very high R^2 value of 0.9959 indicating an excellent match with the data. As the discharge was increased, the wheel rotation was only able to increase from 25.06 rpm to 41.47 rpm resulting in rotational kinetic energy of 12.470 Joules less than AC 45° and WFAC 45°, following a similar linear pattern as the other configurations. Overall, this figure shows that an increase in water discharge is closely related to an increase in waterwheel rotation just as in previous studies [34]. The difference in efficiency varies between wheel configurations and water discharge ranges.

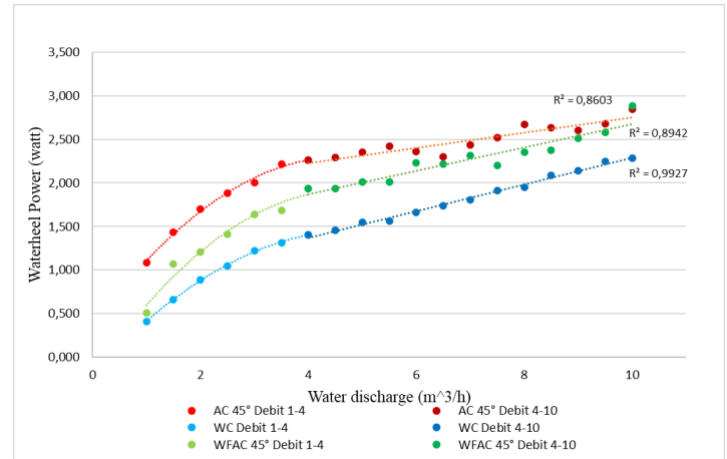


Fig. 6. Waterwheel Power (watt)

Figure 6 shows the relationship between water discharge (m^3/h) and waterwheel power (watt), indicating that the higher the water discharge, the more power the waterwheel produces. This graph consists of several sets of data, each representing different conditions, namely AC 45°, WC, and WFAC 45° at discharge ranges of 1-4 m^3/h and 4-10 m^3/h , respectively. The difference between the small discharge range (1-4) and the large discharge range (4-10) can be seen from the different shapes of the curves used: polynomial curves for discharge 1-4 m^3/h and linear curves for discharge 4-10 m^3/h .

In the variable AC 45° waterwheel, the waterwheel configuration is at a 45° angle. In the discharge range of 1-4 m^3/h , the curve shows a polynomial pattern, where the waterwheel power increases sharply from about 1.09 to almost 2.26 watt. In the discharge range of 4-10 m^3/hr , the pattern changes to linear, with the power continuing to increase steadily until it reaches 2.85 watts at a discharge of 10 m^3/hr . The $R^2 = 0.8603$ value for this linear curve indicates that the model does a good job of explaining the relationship between water discharge and waterwheel power.

The 45° WFAC variable wheel, where at a discharge of 1-4 m^3/h , the curve shows polynomial properties with the resulting wheel power relatively smaller than that of the 45° AC, which ranges from 0.51 watts to 1.94 watts. This phenomenon can be explained by the process of inertia caused by water, which makes the wheel heavier to rotate. So that the power generated is smaller than that of AC 45°. When the discharge increases from 4 to 10 m^3/hour , the power of the waterwheel increases linearly until it reaches about 2.88 watts greater than AC 45°. This occurs because the increase in water discharge causes an increase in the moment of inertia, which in turn generates greater rotational kinetic energy, allowing the waterwheel power to reach its maximum point. The value of $R^2 = 0.8942$ for this linear curve indicates that the relationship between water discharge and waterwheel power is stronger than AC 45° at large discharge.

At the discharge range of 1-4 m^3/h , the polynomial curve shows the generated waterwheel power starts from about 0.41 watts and increases up to 1.41 watts. In the discharge range of 4-10 m^3/h , the

waterwheel power increased linearly from 1.41 watts to 2.29 watts with a very strong relationship $R^2 = 0.9927$.

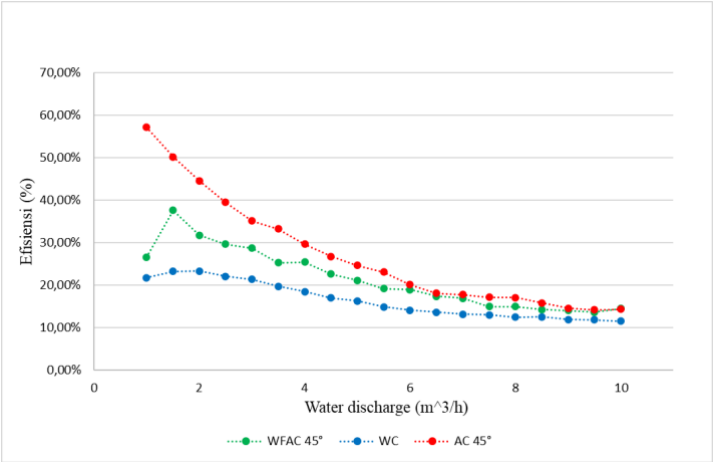


Fig. 7. Waterwheel efficiency (%)

Figure 7 illustrates the maximum and minimum waterwheel performance conditions observed in the operating system. The highest efficiency, recorded at variable AC 45°, occurred at a discharge of 1 m³/h, with an efficiency of 57.08%. In contrast, the lowest efficiency occurred at a discharge of 10 m³/h, with an efficiency of 14.32%. At variable WFAC 45°, the highest efficiency was achieved at a discharge of 1½ m³/h, which resulted in an efficiency of 37.53%. An important phenomenon occurred at a discharge of 1 m³/h, where the efficiency initially decreased but then increased rapidly at a discharge of 1½ m³/h. This phenomenon can be attributed to the rotational inertia at a discharge of 1 m³/h, which causes the rotation of the waterwheel to rotate slowly. However, as the discharge increased, the water mass inside the waterwheel generated a moment of inertia similar to that observed in a previous study [35], which led to an increase in efficiency. The lowest efficiency at variable WFAC 45° was recorded at a discharge of 9½ m³/h, with a value of 13.63%. In addition, at a discharge of 2 m³/h, the maximum efficiency in the WC variable reached 23.30%, while the minimum efficiency at a discharge of 10 m³/h was 11.50%. Next, the efficiencies of the WC, 45° AC, and 45° WFAC compared to previous studies as shown in Table 4, in addition to the results of previous studies.

Table 4. Comparison of waterwheel performance efficiency with previous studies

Variable overshot water wheel	Efficiency	Reference
Waterwheel Without Cap (WC) diameter 0.45 m	23.30%	
Waterwheel Angle Cap (AC 45°) diameter 0.45 m	57.08%	
Waterwheel Water Filled Angle Cap (WFAC 45°) diameter 0.45 m	37.53%	
Waterwheel nozzle angle 30° diameter 0.50 m	25.05%	[36]
Waterwheel using square penstock diameter 0.60 m	42.00%	[37]
Waterwheel bucket configuration -20 diameter 0.90 m	45.00%	[38]

Based on Table 4, the efficiency of an overshot waterwheel is influenced by the blade design and the water flow system. The uncovered waterwheel (WC) was only able to achieve an efficiency of 23.30%. However, the use of a blade cover with a 45° angle (AC 45°) increased the efficiency to 57.08%. When water was

introduced into the closed angle (WFAC 45°), the efficiency decreased to 37.53%, possibly due to water content in the closed blade. The use of a nozzle with a 30° angle resulted in an efficiency of 25.05%, which is still lower than the (WFAC 45°) configuration. The square-shaped penstock with a diameter of 0.60 m produced an efficiency of 42.00%, while the 0.90 m diameter bucket configuration showed an increase in efficiency to 45.00%, but still lower than the 0.45 m diameter 45° AC closed blade design. Overall, the closed blade design proved to be the most effective in improving efficiency compared to simply increasing the diameter.

Conclusion

The waterwheel with a 45° angle cap (AC 45°) shows better rotation performance at a discharge of 10 m³/h which is 48.56 rpm, the variable water fill angle cap (WFAC 45°) is 47.47 rpm and the variable waterwheel without a cap (WC) is 41.47 rpm weaker because the flow of water directly falling down is not maximally concentrated on the blade of the waterwheel. In addition, in producing waterwheel power with a discharge of 10 m³/h. The variable without a cap (WC) produces a waterwheel power of 2.29 W, the 45° angle cap variable (AC 45°) produces a waterwheel power of 2.85 W and the 45° water-filled angle cap variable (WFAC 45°) produces a waterwheel power of 2.88 W higher than the without a cap and 45° angle cap. The addition of load by filling water on the waterwheel can increase the moment of inertia and affect the increase in rotational kinetic energy which results in an increase in wheel power. As for the efficiency of waterwheel performance at a discharge of 10 m³/h. The efficiency of the waterwheel performance on the variable without a cap is 11, 50%, the variable angle cap 45° is 14, 32% and the 45° water-filled angle cap variable is 14, 50% higher than the variable without a cap and angle cap 45°. The variable water-filled angle cap (WFAC 45°) with the provision of water on the closed blade gives the best results in terms of waterwheel power and waterwheel performance efficiency at a discharge of 10 m³/h. Further research is recommended to use a higher water discharge than this study in order to obtain more maximum waterwheel power and waterwheel performance efficiency in overshot waterwheels.

Acknowledgment

The authors express their sincere gratitude to the Renewable Energy Research Team, Faculty of Industrial Technology and Informatics, Universitas Muhammadiyah Prof. Dr. Hamka, for the financial support provided for this research.

References

[1] R. A. Febriansyar, T. Riyanto, dan I. Istadi, “Analysis of CaCO3 Impregnation on HY Zeolite Surface Area, Pore Size, and Activity in the Catalytic Cracking of Palm Oil to Biofuels,” *Teknik*, vol. 43, no. 1, hal. 78–86, 2022, doi: 10.14710/teknik.v43i1.44579 Copyright.

[2] T. C. Lee, M. K. Anser, A. A. Nassani, M. Haffar, K. Zaman, dan M. M. Q. Abro, “Managing natural resources through sustainable environmental actions: A cross-sectional study of 138 countries,” *Sustain.*, vol. 13, no. 22, hal. 2–19, 2021.

[3] R. D. Syahril, R. Soenoko, T. D. Widodo, dan A. Sunarso, “Pengaruh Tinggi Celah Aliran Pada Sluice Gate Terhadap Kinerja Kincir Air Jenis Sudu Melengkung,” *J. Rekayasa Mesin*, vol. 14, no. 1, hal. 97–103, 2023.

[4] D. Mugisidi, I. N. Fauzi, O. Heriyani, Y. Djeli, E. Aidhilhan, dan P. H. Gunawan, “Development of the Dethridge Wheel Blade Shape for Hydropower Generation in Irrigation Canals in Indonesia,” *J. Adv. Res. Fluid Mech. Therm. Sci.*, vol. 98, no. 2, hal. 146–156, 2022.

[5] Y. D. Herlambang, G. Suwoto, B. M. Hermawan, F. G.

- Sumarno, P. Negeri, dan P. N. Semarang, "Micro Hydro Power Plant (MHP) performance using breast-shot waterwheel with different electrical load to improve efficiency," *Disseminating Inf. Res. Mech. Eng. Polimesin*, vol. 22, no. 3, hal. 278–283, 2024.
- [6] L. N. Rahayu dan J. Windarta, "Tinjauan Potensi dan Kebijakan Pengembangan PLTA dan PLTMH di Indonesia," *J. Energi Baru dan Terbarukan*, vol. 3, no. 2, hal. 88–98, 2022.
- [7] A. Rahman Hafiz, A. Nuramal, dan N. Iman Supardi, "Analisi Produksi Listrik di Pembangkit Listrik Tenaga Minihidro (PLTM) Analysis of Electricity Production in Mini Hydro Power Plants (PLTM)," *Rekayasa Mek.*, vol. 6, no. 1, hal. 15–21, 2022.
- [8] Y. Dewantoro Herlambang, G. Suwoto, B. Mei Hermawan, dan F. Gatot Sumarno, "The effect of variations in electric load on the performance of a 3 kW Micro Hydro Power Plant using an undershot waterwheel," *Disseminating Inf. Res. Mech. Eng. Polimesin*, vol. 21, no. 2, hal. 214–218, 2023.
- [9] R. Dyaa Sudiro, L. Halim, dan B. Made Arthaya, "Implementasi Dan Pengujian Prototipe Turbin Jenis Propeller Untuk Pembangkit Listrik Tenaga Mikrohidro," *J. Rekayasa Mesin*, vol. 15, no. 2, hal. 919–936, 2024.
- [10] E. Quaranta dan R. Revelli, "Gravity water wheels as a micro hydropower energy source: A review based on historic data, design methods, efficiencies and modern optimizations," *Renew. Sustain. Energy Rev.*, vol. 97, hal. 414–427, 2018.
- [11] M. H. Kurniawan, A. Eksperimental, P. Performa..., dan K. K. Ayuningtiyas, "Analisis Eksperimental Pengaruh Performa Aliran Natural (Tanpa Pengarah) dan Penggunaan Nozzle Pada Kincir Air Jenis Breastshot," *Indones. J. Eng. Technol.*, vol. 5, no. 1, hal. 2623–2464, 2022.
- [12] K.-L. Weng, F.-C. C. Chen, dan Y.-H. Lee, "Application Of Water Energy System To Balance Energy And Environment In The Whole World," *IEEE Eurasia Conf. IOT, Communication Eng.*, hal. 21–23, 2019.
- [13] E. Quaranta dan R. Revelli, "Performance Optimization of Overshot Water Wheels at High Rotational Speeds for Hydropower Applications," *J. Hydraul. Eng.*, vol. 146, no. 9, hal. 1–5, 2020.
- [14] A. Agato, A. sunarso Sunarso, N. Narsih, D. S. Domi, dan D. Iswanda, "Optimasi Unjuk Kerja Kincir Air Undershot," *J. Rekayasa Mesin*, vol. 14, no. 1, hal. 251–260, 2023.
- [15] H. Putra Prabawa, D. Mugisidi, M. Yusuf D, dan O. Heriyani, "Pengaruh Variasi Ukuran Diameter Nozzle Terhadap Daya Dan Efisiensi Kincir Air Sudu Datar," in *Jurnal UMJ*, 2016, hal. 1–8.
- [16] Warjito, D. Adanta, Budiarto, dan A. P. Prakoso, "The effect of bucketnumber on breastshot waterwheel performance," in *IOP Conference Series: Earth and Environmental Science*, Jan 2018, hal. 1–7.
- [17] F. J. Sánchez-Jiménez dan J. A. González, "Watermills: The origin of the use of renewable hydraulic energy in Spain," *Ind. Archaeol. Rev.*, vol. 40, no. 1, hal. 2–10, 2018.
- [18] I. Gunawan Widodo, A. Sunarso, H. Sihombing, dan D. Sulistiono, "Pengaruh Kedalaman Pencelupan Sudu Kincir Terhadap Unjuk Kerja Kincir Air," *J. Rekayasa Mesin*, vol. 13, no. 2, hal. 62–66, 2018.
- [19] M. H. Nguyen, H. Jeong, dan C. Yang, "A study on flow fields and performance of water wheel turbine using experimental and numerical analyses," *Sci. China Technol. Sci.*, vol. 61, no. 3, hal. 464–474, 2018.
- [20] E. Quaranta dan R. Revelli, "Hydraulic Behavior and Performance of Breastshot Water Wheels for Different Numbers of Blades," *J. Hydraul. Eng.*, vol. 143, no. 1, hal. 1–10, Jan 2017.
- [21] D. Mugisidi, O. Heriyani, R. A. Luhung, dan M. R. D. Andrian, "Utilization of the dethridge wheel as a low head power generator and loss analysis," in *MATEC Web of Conferences*, 2018, hal. 1–6.
- [22] Agato, Deendarlianto, Indarto, dan A. Sunarso, "Simulasi Numerik Aliran Fluida Pada Kincir Air Menggunakan Metode Sliding Mesh Interface," *J. Rekayasa Mesin*, vol. 15, no. 2, hal. 955–966, 2023.
- [23] M. Castro-García, J. I. Rojas-Sola, dan E. De La Morena-de La Fuente, "Technical and functional analysis of Albolafia waterwheel (Cordoba, Spain): 3D modeling, computational-fluid dynamics simulation and finite-element analysis," *Energy Convers. Manag.*, vol. 92, hal. 207–214, 2015, doi: 10.1016/j.enconman.2014.12.047.
- [24] S. D. Boedi, A. N. Mekel, dan A. Maidangkay, "Rancang Bangun Turbin Kinetik Sudu Berengsel Luar Sebagai Pembangkit Listrik Skala Pikohidro," *Otopro*, vol. 17, no. 2, hal. 69–75, 2022.
- [25] N. Mandal dan G. Rajita, "An accurate technique of measurement of flow rate using rotameter as a primary sensor and an improved op-amp based network," *Flow Meas. Instrum.*, vol. 58, hal. 38–45, 2017.
- [26] M. R. Ramdhani, R. Irwansyah, Budiarto, Warjito, dan D. Adanta, "Investigation of the 16 blades pico scale breastshot waterwheel performance in actual river condition," *J. Adv. Res. Fluid Mech. Therm. Sci.*, vol. 75, no. 1, hal. 38–47, 2020.
- [27] J. Štigler, "Overshot water wheel efficiency measurements for low heads and low flowrates," *EPJ Web Conf.*, vol. 269, hal. 01058, 2022.
- [28] M. F. Basar, I. A. Zulkarnain, K. Sopian, dan N. A. Mohd Rais, "Investigations on the performance of bottle blade overshot water wheel in very low head resources for pico hydropower," *Energy Harvest. Syst.*, vol. 11, no. 1, hal. 2–10, 2024.
- [29] Z. Nurfadilah, D. Mugisidi, A. Rahman, S. Pohan, dan O. Heriyani, "Pengaruh Kincir Tertutup Terhadap Efisiensi dan Rugi-rugi," *Rekayasa Energi Manufaktur J.*, vol. 8, no. 1, hal. 2528–3723, 2023.
- [30] E. Quaranta dan R. Revelli, "Output power and power losses estimation for an overshot water wheel," *Renew. Energy*, vol. 83, hal. 979–987, 2015.
- [31] M. Darwis, "Analisis Pengaruh Pembukaan Katup Terhadap Kinerja Turbin Air," *J. PAI*, vol. 3, no. 4, hal. 365–376, 2023.
- [32] Marinus S, Hiendro A, dan Yandri, "Studi Aplikatif Roda Gila (FLYWHEEL) Pada Pembangkit Listrik Tenaga Mikrohidro (PLTMH)," *J. Elektr. Eng. Energy Inf. Teknol.*, vol. 7, no. 1, hal. 1–9, 2019.
- [33] A. Digdoyo, F. Rahmasari, A. Budi Djatmiko, E. Yuniaty, dan D. Saepul Anwar, "Rancang Bangun Alat Uji Momen Inersia Massa Suatu Elemen Mesin dalam Tiga Arah Sumbu," *J. Ilm. Rekayasa Dan Inov.*, vol. 4, no. 2, hal. 193–200, 2022.
- [34] M. F. Basar, N. A. M. Rais, A. A. Rahman, W. A. Mustafa, K. Sopian, dan K. V. Wong, "Optimization of Reaction Typed Water Turbine in Very Low Head Water Resources for Pico Hydro," *J. Adv. Res. Fluid Mech. Therm. Sci.*, vol. 90, no. 1, hal. 23–39, 2022.
- [35] D. Iswanda, R. Soenoko, W. Winarto, dan A. Sunarso, "Pengaruh Besar Sudut Butterfly Guide terhadap Unjuk Kerja Kincir Air," *J. Rekayasa Mesin*, vol. 12, no. 3, hal. 653–661, Des 2021, doi: 10.21776/ub.jrm.2021.012.03.15.
- [36] I. Wayan, B. Saputra, dan A. I. Weking, "Rancang Bangun Pemodelan Pembangkit Listrik Tenaga Mikro Hidro (PLTMH) Menggunakan Kincir Overshot Wheel," *Teknik Elektro*, vol. 16, no. 02, 2017.

- [37] T. Harismandri, J. Teknik Mesin, F. Teknik Universitas Riau Kampus Binawidya Km, dan S. Baru Panam, "PENGUJIAN PRESTASI KINCIR AIR TIPE OVERSHOT DI IRIGASI KAMPUS UNIVERSITAS RIAU DENGAN PENSTOCK BERVARIASI," 2017.
- [38] J. Štigler, "Overshot water wheel efficiency measurements for low heads and low flowrates," *EPJ Web Conf.*, vol. 269, hal. 01058, 2022.

Processed dates: received on 2025-02-26, reviewed on 2025-03-27,
 accepted on 2025-04-23 and online availability on 2025-04-30

Impact of angle cap and water-filled blade modification on the output of overshot waterwheels

Rizki Afif Afandi, Dan Mugisidi*, Giri Parwatomoko, Oktarina Heriyani

Department of Mechanical Engineering, University of Muhammadiyah Prof. Dr. Hamka, Jakarta 13830, Indonesia

*Corresponding Author: dan.mugisidi@uhamka.ac.id

Abstract

The utilization of water resources as renewable energy through waterwheels presents an environmentally friendly alternative, however, its efficiency requires improvement through technological modification. This research investigates two design modifications: a 45° Angle Cap (AC) and a Water-Filled Angle Cap (WFAC), in comparison with a waterwheel without a Cap (WC). Experiments were conducted at discharges from 1 to 10 m³/h with a constant torque load of 0.05 N-m. The highest efficiency of 57.08% was achieved in the AC 45° configuration at 1 m³/h, generating 1.09 watts of power, while the WFAC 45° yielded the highest power output of 2.88 watts at 10 m³/h with an efficiency of 14.50%. Although increasing discharge generally led to higher power input, it was accompanied by a decrease in efficiency across all configurations. Among all three variations, WFAC 45° demonstrated superior performance at higher discharges, indicating its potential for enhancing the power and efficiency of overshot waterwheels.

Keywords:

Waterwheel, renewable energy, rotational kinetic energy, moment of inertia, efficiency.

1 Introduction

Sustainable utilization of natural resources is one of the central issues in the global effort to deal with climate change and environmental degradation [1], [2], including Indonesia. Indonesia is one of the developing countries that has abundant renewable natural resources and one of them is water [3]. Water as a renewable natural energy has great potential to be converted from kinetic energy into electrical energy [4]. Hydropower plants are designed to generate electricity on a large scale, while small-scale plants are known as Micro-hydro Power Plants (MHP) [5], [6], [7]. MHP utilizes the flow of rivers or other water sources to generate electricity in a sustainable manner to meet the needs of housing, agriculture, and community facilities [8], [9], [10].

The utilization of water as a renewable energy source requires a waterwheel that plays an important role in converting kinetic energy from water flow into other forms of energy and is usually converted into electrical energy through a generator that operates without reducing the volume of water [11], [12]. In this context, waterwheels were chosen because they are more environmentally friendly and cost-effective [13]. Waterwheels have 3 types: overshot, breast shot, and undershot waterwheels. [14]. In an overshot waterwheel, water flows from the top of the wheel and spins as it falls to a lower surface. In a breast shot waterwheel, water flows over the center of the waterwheel which is positioned parallel to the top [15]. Meanwhile, in an undershot waterwheel, the waterwheel is placed slightly above the water flow so that only the bottom part of the waterwheel enters the water. The difference between the three types of waterwheels lies

in the type of energy transferred to the waterwheel which affects the efficiency and the exact conditions of use of each waterwheel. [16], [17].

Various studies have been conducted on waterwheels, including the effect of adding angled caps, blade thickness on flat-bladed waterwheels, and the relationship between blade height and power and efficiency [18], [19]. The efficiency of waterwheels is influenced by a variety of factors, including aspects of the geometry of the wheel, such as diameter size, number of blades, and their curved shape, as well as operational factors such as water level (head), flow discharge, load torque, and water flow position [20], [21]. To achieve high efficiency, more in-depth research is needed related to these factors, with experimental methods under field conditions [22]. Previous research shows that the shape of the waterwheel blades is very important because a certain shape makes it easier for water to enter between the blades and is one of the causes of the wheel's rotation. In addition, the moment of inertia of the waterwheel is also an important factor that affects the efficiency and stability of the waterwheel [23]. Although research on waterwheels has been going on for a long time, until now no waterwheel has been equipped with a director to force water to enter between the blades, even though this has the potential to increase the power generated. Another attempt that has not yet been made is to introduce water into the waterwheel to increase its moment of inertia.

Therefore, this study aims to determine the performance of the power generated by the wheel and the efficiency of the wheel's performance by comparing a straight-blade water wheel with a water wheel that has a blade cover to direct water in, as well as a wheel that contains water in the blade.

2 Method

The waterwheel used in the study is an overshot waterwheel with 16 blades. There are 2 models of blade caps, namely closed water-filled and 45° angled caps to the outside as shown in Fig. 1. The closed water-filled blades aim to produce a moment of inertia and increase the kinetic energy of the wheel. The cap that forms a 45° angle on the blades serves to expand the area outside the blades so that the water flow is concentrated in the blade area to achieve maximum rotation.

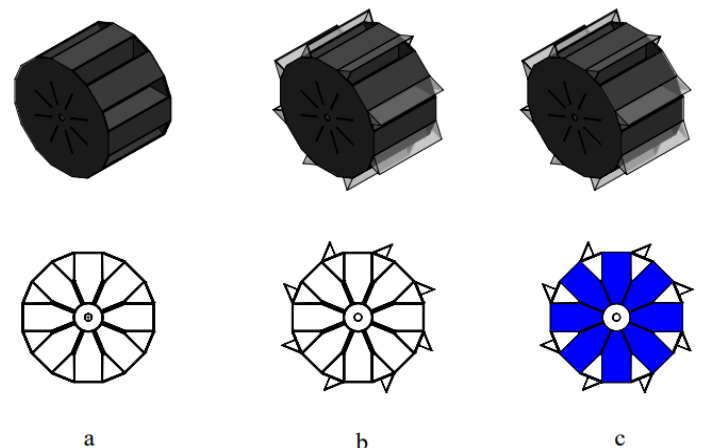


Fig. 1. Overshot waterwheel. a) Isometric and side view Without Cap (WC), b) isometric and side view Angle Cap (AC) 45°, and c) isometric and side view Water-Filled Angle Cap (WFAC) 45°

The test method applied in the overshot waterwheel research is the actual experimental method on a laboratory scale. The test was carried out in the Mechanical Engineering laboratory of University Prof. Dr Hamka Muhammadiyah. Tests were carried out using dependent variables and independent variables. The dependent variable consists of rotation, torque, waterwheel power, and waterwheel efficiency. While the independent variables are Without Cap (WC), Angle Cap (AC) 45°, and Water-Filled Angle Cap (WFAC) 45° shown in Fig. 1. The flowchart of the overshot waterwheel research can be seen in Fig. 2.

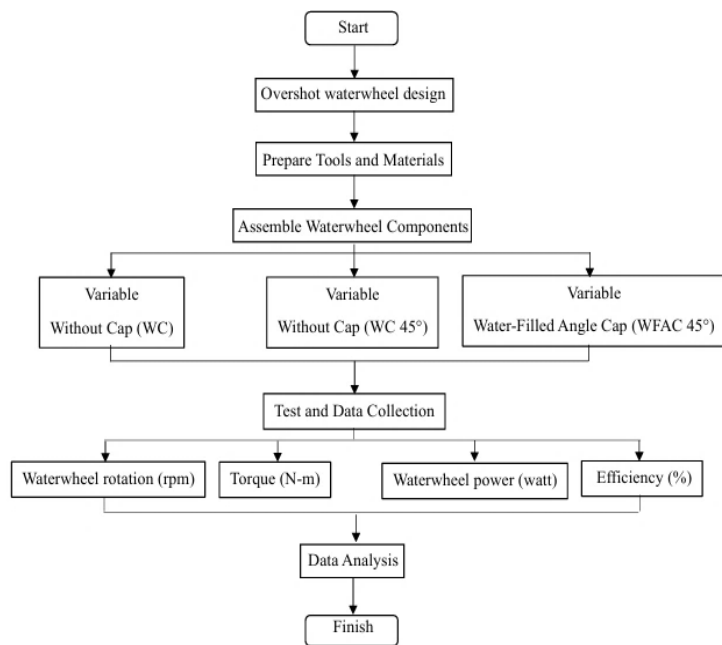


Fig. 2. Flowchart of overshot waterwheel research systematic

Fig. 2 is a systematic way of conducting overshot waterwheel research. This research consists of three interconnected stages. The first stage includes preparation of the design concept, equipment needed for research, and assembly of the waterwheel components. The second stage is a trial to ensure the research tool functions properly. The third stage is data collection through recording which is then followed by the data analysis process.

The design of the overshot waterwheel involved design, cutting, welding, and testing. The manufacture of the waterwheel housing uses melamine multiplex material, with the inside coated with resin and the outside coated with waterproof paint. The wheelhouse is 100 cm high, 100 cm long, and 37 cm wide. The lid is made of acrylic material with a 45° tilt angle. Meanwhile, the wheel is made of iron material with a thickness of 3 mm.

The wheel mounting frame plays a role in supporting the pillow block to support the wheel shaft, ensuring optimal wheel rotation. The waterwheel shaft is solid with a diameter of 25 mm, while the waterwheel has a diameter of 45 cm and a thickness of 30 cm. The geometry design of the overshot waterwheel in millimeters (mm) is shown in Fig. 3.

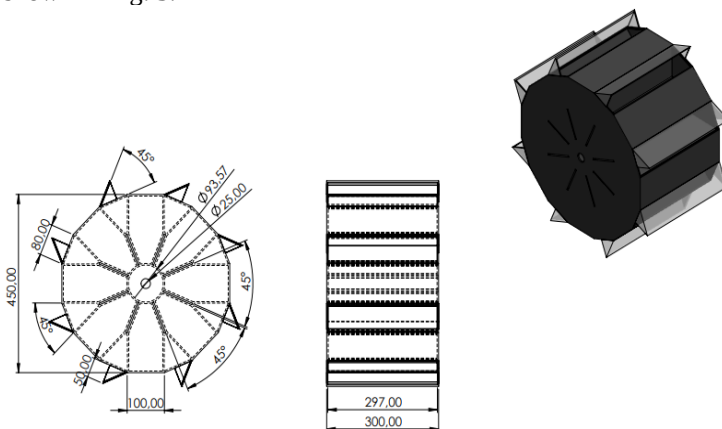


Fig. 3. Geometry of waterwheel

Measuring instruments used for the data collection process include, Torque meter functions to collect Torque data from the waterwheel. Data collection of waterwheel rotation using a Tachometer measuring instrument [24]. Water discharge settings using a Rotameter measuring instrument and water flow rate measured using a Flow velocity meter tool [25], according to the specifications listed in Table 1.

This study utilized one waterwheel to collect data on the independent variables. The four red-colored dots shown in the fig. 4

indicate the data collection locations required during the testing process.

Table 1. Specifications of waterwheel test measuring instrument

Measurement tool	Type	Capacity
Torque meter	Lutron TQ-8800	0 - 0.15 (N-m)
Tachometer	KW06-563	0 - 20.000 (rpm)
Rotameter	LZT-50S105/N	1 - 10 m ³ /h)
Flow velocity meter	Flo watch FL-03	2 - 150 (km/h)

Data was collected using flow rates of 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, up to 10 m³/h, which were circulated using a pump. The independent variables tested included a 45° angle cap, no cap, and a 45° angle cap with water content. Data was taken more than once to ensure the test results remained consistent.

The installation scheme of the overshot waterwheel test consists of 17 components, each of which plays a crucial role with different functions, starting from the water pump in charge of maintaining the continuity of water flow through the pipe from the waterwheel house, forwarded to the water trough according to the design shown in Fig. 4.

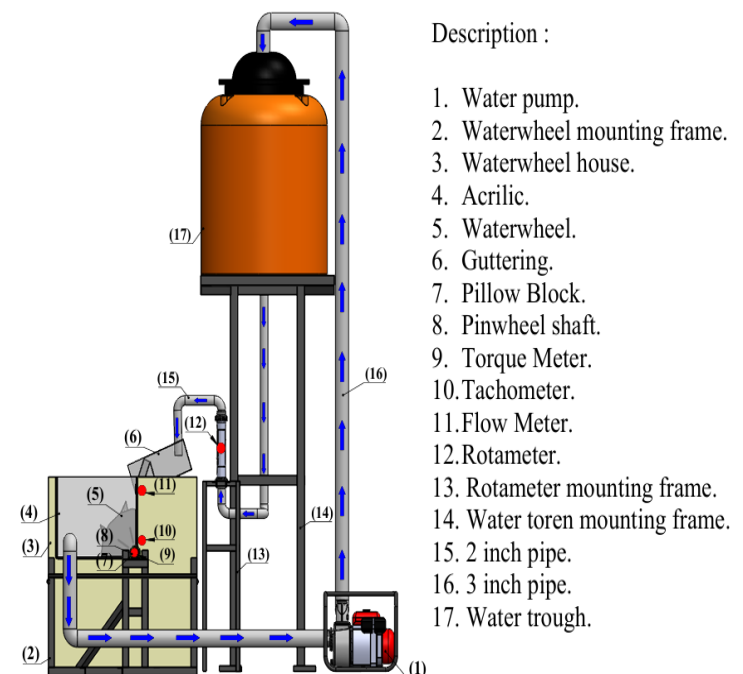


Fig. 4. Schematic design of overshot waterwheel testing installation

The water trough, which acts as the main reservoir, is designed to facilitate the precise regulation of water discharge, which is done with the help of a rotameter gauge to control the flow of water into the gutter. The gutter acts as a guide, concentrating the water flow precisely on the 45° tilt angle of the blades, ensuring an even distribution of water across the surface of the blades. The blade's main function is to maximize the efficiency of the waterwheel rotation by adjusting its rotation rate to the volume and velocity of the incoming water flow, which ultimately determines the overall performance of the waterwheel. As a control and reference in this test, the detailed specifications of the waterwheel are presented in Table 2, providing a clear guide to the technical parameters tested.

Table 2. Waterwheel specifications

Specification	Parameter
Weight of Waterwheel WC	41 kg
Weight of Waterwheel AC 45°	42.5 kg
Weight of Waterwheel WFAC 45°	60 kg
Toque	0.05 N-m

The precision-designed components of the waterwheel are then assembled into a highly complex and interconnected circuit, where each element contributes to the functionality of the entire system. The artificial waterways, whose continuity is supported by the use of pumps, serve to maintain a steady and controlled flow of water, which in turn allows for high-accuracy testing of the efficiency of the waterwheel. The overall result of the waterwheel assembly, which incorporates various aspects of technical design and construction, can be seen in Fig. 5.



Fig. 5. The assembled overshot waterwheel installation and data collection location. (a) water flow velocity data, (b) water discharge data, (c) waterwheel torque data, and (d) waterwheel rotation data

Experimental results were processed to determine the efficiency of the waterwheel. Energy from water can be obtained through water flowing into the blades of the waterwheel. The power generated by the water (P_{in}) can be calculated using Eq. (1) [26].

$$P_{in} = \rho \cdot g \cdot h \cdot Q \quad (1)$$

Where P_{in} is water power (W), ρ is density of water (998.2 kg/m³), g is gravitational acceleration (m/s²), h is waterfall height (m), and Q is water discharge (m³/h).

Where the head is the height difference between the surface of the base of the waterwheel housing and the height of the water surface before entering the waterwheel blades [27]. The circumferential speed of the wheel commonly known as angular velocity (ω) is obtained from Eq. (2) [28]. Meanwhile, to calculate the waterwheel power (P_{out}) using the Eq. (3) [29].

$$\omega = \frac{2 \cdot \pi \cdot n}{60} \quad (2)$$

$$P_{out} = T \cdot \omega \quad (3)$$

Where ω is angular velocity (rad/s), n is waterwheel rotation (rpm), and T is torque (N-m).

The efficiency of the waterwheel (η) is the ratio between the power generated by the waterwheel and the water power, which can be calculated using Eq. (4) [30].

$$\eta = \frac{P_{out}}{P_{in}} \times 100\% \quad (4)$$

The rotation of a solid body with mass (m) moving translational (linear) with velocity (v) using Eq. (5) can be explained through kinetic energy according to Eq. (6) [31].

$$v = \omega \cdot r \quad (5)$$

$$Ek = \frac{1}{2} \cdot m \cdot v^2 \quad (6)$$

Where r is distance of the waterwheel to the shaft (m), Ek is kinetic energy (J), m is mass of the wheel (kg), and v is water flow velocity (m/s²).

It is assumed that the kinetic energy measured in a solid cylinder results in Rotational Kinetic Energy (Ek_{rot}) which is related to the moment of Inertia (I) and can be obtained through Eq. (7) [32].

$$Ek_{rot} = \frac{1}{2} \cdot I \cdot \omega^2 \quad (7)$$

Where is Ek_{rot} is rotational kinetic energy (J), and I is moment of inertia (kg.m²).

Moment of Inertia (I) is the property of an object that allows it to maintain its position in rotational motion [33]. A stationary object tends to maintain its position, so a moving object will try to maintain its rotational motion. Mathematically, the moment of inertia can be obtained from Eq. (8).

$$I = m \cdot r^2 \quad (8)$$

3 Results and discussion

After obtaining torque and rotation data for each discharge variation. Calculation of water power, waterwheel power, and overshot waterwheel efficiency using Eqs. (1), (3), and (4). The results of testing and data processing are presented in the form of tables and figures that show the relationship between these factors. The complete results of data processing can be seen in Table 3.

The rotation of the waterwheel is influenced by the water flow using Eq. (6) and the head of the waterwheel. At the discharge position of 1-5.5 m³/h, the head value was recorded at 0.7 m, while at the discharge of 6-8.5 m³/h, the head value increased by 0.02 m, and reached its peak at the discharge of 9 to 10 m³/h with a head value of 0.73 m. This increase in head is caused by the increase in water flow in the gutter of the waterwheel. The increase in head is caused by the increase in the flow of water flowing in the gutter of the waterwheel. The waterwheel without the corner cap experiences an obstacle, where the water flow cannot hit the entire blade optimally. As a result, the water flow that enters the blades is focused in the middle and goes straight down to the bottom of the wheel, so it cannot maximize the water flow and causes a small rotation.

On the other hand, the waterwheel with a 45° angle cap shows a larger rotation than the waterwheel without a cap, because the angle cap reduces the opening area of the waterwheel. This causes the flow of water into the blade of the waterwheel not to come out immediately, due to obstruction by the waterwheel cover, so that the water can be concentrated effectively towards the blade of the waterwheel.

Table 3. Data processing results of variable waterwheel WC, AC 45°, WFAC 45°

Q (m ³ /h)	n (rpm)			P _{in} (watt)			P _{out} (watt)			efficiency (%)		
	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°
1	7.41	19.62	8.95	1.91	1.91	1.91	0.41	1.09	0.51	21.70	57.08	26.55
1,5	11.96	25.66	18.31	2.86	2.86	2.86	0.66	1.43	1.07	23.21	50.09	37.53
2	16.22	30.02	19.91	3.82	3.82	3.82	0.89	1.70	1.21	23.30	44.50	31.69

Q (m ³ /h)	n (rpm)			P _{in} (watt)			P _{out} (watt)			efficiency (%)		
	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°
2,5	19.41	34.12	24.96	4.68	4.68	4.68	1.05	1.88	1.41	22.02	39.46	29.60
3	21.62	37.33	28.46	5.72	5.72	5.72	1.22	2.01	1.64	21.37	35.07	28.64
3,5	23.70	38.27	30.13	6.68	6.68	6.68	1.32	2.22	1.68	19.70	33.21	25.21
4	25.06	40.50	32.29	7.63	7.63	7.63	1.41	2.26	1.94	18.45	29.64	25.38
4,5	26.28	41.55	33.43	8.58	8.58	8.58	1.46	2.29	1.94	16.99	26.70	22.57
5	28.12	42.34	34.90	9.54	9.54	9.54	1.55	2.35	2.01	16.26	24.64	21.07
5,5	28.66	42.77	36.21	10.49	10.49	10.49	1.56	2.42	2.01	14.88	23.05	19.16
6	29.75	43.38	37.39	11.77	11.77	11.77	1.66	2.36	2.23	14.11	20.07	18.96
6,5	31.95	43.96	38.42	12.75	12.75	12.75	1.74	2.30	2.21	13.64	18.05	17.35
7	33.11	44.13	39.06	13.73	13.73	13.73	1.80	2.43	2.32	13.13	17.72	16.88
7,5	34.20	45.06	39.67	14.72	14.72	14.72	1.91	2.52	2.20	12.98	17.10	14.96
8	36.04	45.86	40.58	15.70	15.70	15.70	1.95	2.67	2.35	12.42	17.03	14.98
8,5	36.68	46.51	41.68	16.68	16.68	16.68	2.09	2.63	2.37	12.52	15.77	14.22
9	38.99	46.87	42.59	17.90	17.90	17.90	2.14	2.60	2.51	11.94	14.53	14.03
9,5	39.91	47.30	44.73	18.90	18.90	18.90	2.24	2.68	2.58	11.87	14.15	13.63
10	41.47	48.56	47.47	19.89	19.89	19.89	2.29	2.85	2.88	11.50	14.32	14.50

Meanwhile, the wheel equipped with a corner cap filled with water experiences a moment of inertia that causes inertia in the rotation of the wheel to be smaller when the discharge is in the range of 1 to 4 m³/h. However, the rotation began to increase at a discharge of 4 to 10 m³/h due to the work of the moment of inertia helping to increase the kinetic energy of the waterwheel rotation, whereas, at a discharge of 10 m³/hour, the rotation of the waterwheel experienced a significant increase compared to the waterwheel using a 45° angle cap without water content. The following figure shows the comparison of the processed data.

Fig. 6 shows the relationship between water discharge (m³/h) on the horizontal axis and wheel speed (rpm) on the vertical axis. In this figure, there are three turbine configurations, namely AC 45°, WC, and WFAC 45°, with each tested at two water discharge ranges: 1-4 m³/h and 4-10 m³/h.

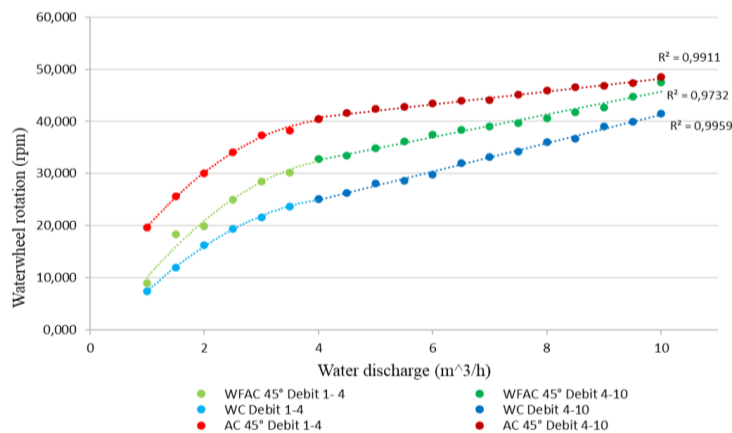


Fig. 6. Waterwheel rotation (rpm)

The AC 45° variable waterwheel represents a polynomial curve at small discharge (1-4 m³/h), where the rotation of the waterwheel increases gradually from 19.62 rpm to 40.50 rpm. The increase in rotation is due to the angle cap which reduces the opening area of the waterwheel so that the water does not fall directly to the bottom of the waterwheel house, resulting in a moment of inertia with the calculation of Eq. (9) of 2.152 kg/m² and generating rotational kinetic energy of 12.249 Joules using the calculation of Eq. (8). At large discharges (4-10 m³/h) show a more stable and linear increase, where the rotation of the waterwheel increases from 40.50 rpm to reach about 48.56 rpm. There is an increase in rotational kinetic energy of 23.386 Joules. The R² value is 0.9911, indicating that the 45° angle cap greatly influences the rotation of the waterwheel.

The WFAC 45° variable wheel represents a polynomial curve at small discharge, where the rotation of the wheel experiences inertia due to the water content of the wheel blades causing the rotation to slow down in contrast to the AC 45°. The rotation starts from about 8.95 rpm and increases to 32.29 rpm. In the increase in rotation, there is a moment of inertia of 3.087 kg/m² resulting in rotational kinetic

energy of 9.242 Joules, with a slower increase when compared to the AC 45° waterwheel. At large discharge, the rotation of the waterwheel increased linearly from 32.29 rpm to 47.47 rpm showing a stable relationship between water discharge and waterwheel rotation. The curve also has a high fit to the data, indicated by the R² value of 0.9732. In the no-water-fill condition, with the same water discharge of 9-10 m³/h, the rotation of the waterwheel recorded a continuous increase, which was 46.87 rpm, 47.30 rpm, and 48.56 rpm. A significant increase in the rotation of the WFAC 45° began to be seen at a discharge of 9-10 m³/hour, respectively 42.59 rpm, 44.73 rpm, and 47.47 rpm and produced rotational kinetic energy of 25.946 Joules. Where water filling produces an increase in rotational kinetic energy, it causes a significant increase in wheel rotation. If the discharge continues the possibility is greater than with AC 45° which increases continuously. This is because the rotational kinetic energy is directly proportional to the square of the rotation speed at large discharge, although the difference in rotation is still visible.

The WC variable wheel showed a polynomial curve configuration at small discharge, with the wheel rotation starting from about 7.41 rpm and increasing up to 25.06 rpm. The moment of inertia value of 2.076 kg/m² produced 3.653 Joules less rotational kinetic energy compared to AC 45° and WFAC 45°, but still had a very high R² value of 0.9959 indicating an excellent match with the data. As the discharge was increased, the wheel rotation was only able to increase from 25.06 rpm to 41.47 rpm resulting in rotational kinetic energy of 12.470 Joules less than AC 45° and WFAC 45°, following a similar linear pattern as the other configurations. Overall, this figure shows that an increase in water discharge is closely related to an increase in waterwheel rotation just as in previous studies [34]. The difference in efficiency varies between wheel configurations and water discharge ranges.

Fig. 7 shows the relationship between water discharge (m³/h) and waterwheel power (watt), indicating that the higher the water discharge, the more power the waterwheel produces. This graph consists of several sets of data, each representing different conditions, namely AC 45°, WC, and WFAC 45° at discharge ranges of 1-4 m³/h and 4-10 m³/h, respectively. The difference between the small discharge range (1-4) and the large discharge range (4-10) can be seen from the different shapes of the curves used: polynomial curves for discharge 1-4 m³/h and linear curves for discharge 4-10 m³/h.

In the variable AC 45° waterwheel, the waterwheel configuration is at a 45° angle. In the discharge range of 1-4 m³/h, the curve shows a polynomial pattern, where the waterwheel power increases sharply from about 1.09 to almost 2.26 watts. In the discharge range of 4-10 m³/hr, the pattern changes to linear, with the power continuing to increase steadily until it reaches 2.85 watts at a discharge of 10 m³/hr. The R² = 0.8603 value for this linear curve indicates that the model does a good job of explaining the relationship between water discharge and waterwheel power.

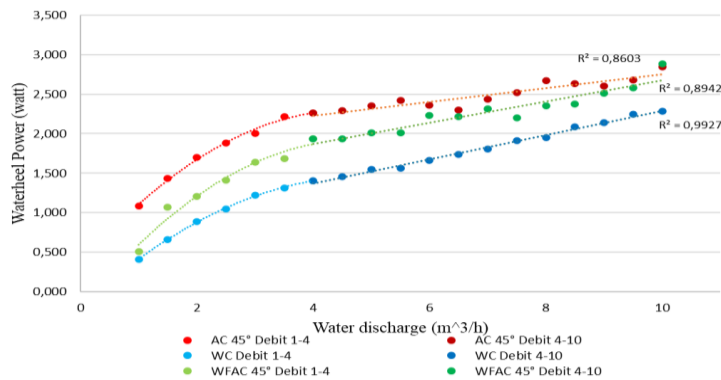


Fig. 7. Waterwheel power (Watt)

The WFAC 45° variable wheel, where at a discharge of 1-4 m³/h, the curve shows polynomial properties with the resulting wheel power relatively smaller than that of the AC 45°, which ranges from 0.51 watts to 1.94 watts. This phenomenon can be explained by the process of inertia caused by water, which makes the wheel heavier to rotate. So that the power generated is smaller than that of AC 45°. When the discharge increases from 4 to 10 m³/hour, the power of the waterwheel increases linearly until it reaches about 2.88 watts greater than AC 45°. This occurs because the increase in water discharge causes an increase in the moment of inertia, which in turn generates greater rotational kinetic energy, allowing the waterwheel power to reach its maximum point. The value of $R^2 = 0.8942$ for this linear curve indicates that the relationship between water discharge and waterwheel power is stronger than AC 45° at large discharge.

At the discharge range of 1-4 m³/h, the polynomial curve shows the generated waterwheel power starts from about 0.41 watts and increases up to 1.41 watts. In the discharge range of 4-10 m³/h, the waterwheel power increased linearly from 1.41 watts to 2.29 watts with a very strong relationship $R^2 = 0.9927$.

Fig. 8 illustrates the maximum and minimum waterwheel performance conditions observed in the operating system. The highest efficiency, recorded at variable AC 45°, occurred at a discharge of 1 m³/h, with an efficiency of 57.08%. In contrast, the lowest efficiency occurred at a discharge of 10 m³/h, with an efficiency of 14.32%. At variable WFAC 45°, the highest efficiency was achieved at a discharge of 1½ m³/h, which resulted in an efficiency of 37.53%.

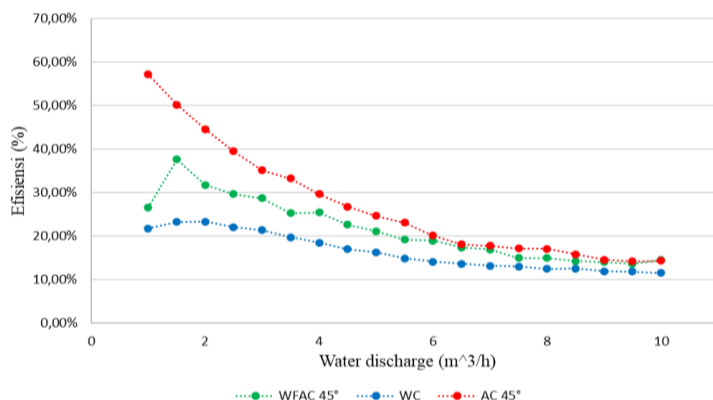


Fig. 8. Waterwheel efficiency (%)

An important phenomenon occurred at a discharge of 1 m³/h, where the efficiency initially decreased but then increased rapidly at a discharge of 1½ m³/h. This phenomenon can be attributed to the rotational inertia at a discharge of 1 m³/h, which causes the rotation of the waterwheel to rotate slowly. However, as the discharge increased, the water mass inside the waterwheel generated a moment of inertia similar to that observed in a previous study [35], which led to an increase in efficiency. The lowest efficiency at variable WFAC 45° was recorded at a discharge of 9½ m³/h, with a value of 13.63%. In addition, at a discharge of 2 m³/h, the maximum efficiency in the WC variable reached 23.30%, while the minimum efficiency at a

discharge of 10 m³/h was 11.50%. Next, the efficiencies of the WC, AC 45°, and WFAC 45° compared to previous studies as shown in Table 4, in addition to the results of previous studies.

Table 4. Comparison of waterwheel performance efficiency with previous studies

Variable overshoot water wheel	Efficiency	Reference
Waterwheel WC diameter 0.45 m	23.30%	
Waterwheel AC 45° diameter 0.45 m	57.08%	
Waterwheel WFAC 45° diameter 0.45 m	37.53%	
Waterwheel nozzle angle 30° diameter 0.50 m	25.05%	[36]
Waterwheel using square penstock diameter 0.60 m	42.00%	[37]
Waterwheel bucket configuration -20 diameter 0.90 m	45.00%	[38]

Based on Table 4, the efficiency of an overshoot waterwheel is influenced by the blade design and the water flow system. The uncovered waterwheel (WC) was only able to achieve an efficiency of 23.30%. However, the use of a blade cover with a 45° angle (AC 45°) increased the efficiency to 57.08%. When water was introduced into the closed angle (WFAC 45°), the efficiency decreased to 37.53%, possibly due to water content in the closed blade. The use of a nozzle with a 30° angle resulted in an efficiency of 25.05%, which is still lower than the (WFAC 45°) configuration. The square-shaped penstock with a diameter of 0.60 m produced an efficiency of 42.00%, while the 0.90 m diameter bucket configuration showed an increase in efficiency to 45.00%, but still lower than the 0.45 m diameter 45° AC closed blade design. Overall, the closed blade design proved to be the most effective in improving efficiency compared to simply increasing the diameter.

4 Conclusion

The utilization of water resources as renewable energy through waterwheels presents an environmentally friendly alternative, however, its efficiency requires improvement through technological modification. This research investigates two design modifications: a 45° angle cap (AC) and a water-filled angle cap (WFAC), in comparison with a waterwheel without a cap (WC). Experiments were conducted at discharges from 1 to 10 m³/h with a constant torque load of 0.05 N-m. The highest efficiency of 57.08% was achieved in the AC 45° configuration at 1 m³/h, generating 1.09 watts of power, while the WFAC 45° yielded the highest power output of 2.88 watts at 10 m³/h with an efficiency of 14.50%. Although increasing discharge generally led to higher power input, it was accompanied by a decrease in efficiency across all configurations. Among all three variations, WFAC 45° demonstrated superior performance at higher discharges, indicating its potential for enhancing the power and efficiency of overshoot waterwheels.

Acknowledgment

The authors express their sincere gratitude to the Renewable Energy Research Team, Faculty of Industrial Technology and Informatics, Universitas Muhammadiyah Prof. Dr. Hamka, for the financial support provided for this research.

References

- [1] R. A. Febriansyar, T. Riyanto, dan I. Istadi, "Analysis of CaCO₃ Impregnation on HY Zeolite Surface Area, Pore Size, and Activity in the Catalytic Cracking of Palm Oil to Biofuels," *Teknik*, vol. 43, no. 1, hal. 78–86, 2022, doi: 10.14710/teknik.v43i1.44579 Copyright.
- [2] T. C. Lee, M. K. Anser, A. A. Nassani, M. Haffar, K. Zaman, dan M. M. Q. Abro, "Managing natural resources through sustainable environmental actions: A cross-sectional study of 138 countries," *Sustain.*, vol. 13, no. 22, hal. 2–19, 2021.
- [3] R. D. Syahrial, R. Soenoko, T. D. Widodo, dan A. Sunarso, "Pengaruh Tinggi Celah Aliran Pada Sluice Gate Terhadap Kinerja Kincir Air Jenis Sudu Melengkung," *J. Rekayasa Mesin*, vol. 14, no. 1, hal. 97–103, 2023.
- [4] D. Mugisidi, I. N. Fauzi, O. Heriyani, Y. Djeli, E. Aidhilhan,

- dan P. H. Gunawan, "Development of the Dethridge Wheel Blade Shape for Hydropower Generation in Irrigation Canals in Indonesia," *J. Adv. Res. Fluid Mech. Therm. Sci.*, vol. 98, no. 2, hal. 146–156, 2022.
- [5] Y. D. Herlambang, G. Suwoto, B. M. Hermawan, F. G. Sumarno, P. Negeri, dan P. N. Semarang, "Micro Hydro Power Plant (MHP) performance using breast-shot waterwheel with different electrical load to improve efficiency," *Disseminating Inf. Res. Mech. Eng. Polimesin*, vol. 22, no. 3, hal. 278–283, 2024.
 - [6] L. N. Rahayu dan J. Windarta, "Tinjauan Potensi dan Kebijakan Pengembangan PLTA dan PLTMH di Indonesia," *J. Energi Baru dan Terbarukan*, vol. 3, no. 2, hal. 88–98, 2022.
 - [7] A. Rahman Hafiz, A. Nuramal, dan N. Iman Supardi, "Analisi Produksi Listrik di Pembangkit Listrik Tenaga Minihidro (PLTM) Analysis of Electricity Production in Mini Hydro Power Plants (PLTM)," *Rekayasa Mek.*, vol. 6, no. 1, hal. 15–21, 2022.
 - [8] Y. Dewantoro Herlambang, G. Suwoto, B. Mei Hermawan, dan F. Gatot Sumarno, "The effect of variations in electric load on the performance of a 3 kW Micro Hydro Power Plant using an undershot waterwheel," *Disseminating Inf. Res. Mech. Eng. Polimesin*, vol. 21, no. 2, hal. 214–218, 2023.
 - [9] R. Dyaa Sudiro, L. Halim, dan B. Made Arthaya, "Implementasi Dan Pengujian Prototipe Turbin Jenis Propeller Untuk Pembangkit Listrik Tenaga Mikrohidro," *J. Rekayasa Mesin*, vol. 15, no. 2, hal. 919–936, 2024.
 - [10] E. Quaranta dan R. Revelli, "Gravity water wheels as a micro hydropower energy source: A review based on historic data, design methods, efficiencies and modern optimizations," *Renew. Sustain. Energy Rev.*, vol. 97, hal. 414–427, 2018.
 - [11] M. H. Kurniawan, A. Eksperimental, P. Performa..., dan K. K. Ayuningtiyas, "Analisis Eksperimental Pengaruh Performa Aliran Natural (Tanpa Pengarah) dan Penggunaan Nozzle Pada Kincir Air Jenis Breastshot," *Indones. J. Eng. Technol.*, vol. 5, no. 1, hal. 2623–2464, 2022.
 - [12] K.-L. Weng, F.-C. C. Chen, dan Y.-H. Lee, "Application Of Water Energy System To Balance Energy And Environment In The Whole World," *IEEE Eurasia Conf. IOT,Communication Eng.*, hal. 21–23, 2019.
 - [13] E. Quaranta dan R. Revelli, "Performance Optimization of Overshot Water Wheels at High Rotational Speeds for Hydropower Applications," *J. Hydraul. Eng.*, vol. 146, no. 9, hal. 1–5, 2020.
 - [14] A. Agato, A. sunarso Sunarso, N. Narsih, D. S. Domi, dan D. Iswanda, "Optimasi Unjuk Kerja Kincir Air Undershot," *J. Rekayasa Mesin*, vol. 14, no. 1, hal. 251–260, 2023.
 - [15] H. Putra Prabawa, D. Mugisidi, M. Yusuf D, dan O. Heriyani, "Pengaruh Variasi Ukuran Diameter Nozzle Terhadap Daya Dan Efisiensi Kincir Air Sudu Datar," in *Jurnal UMJ*, 2016, hal. 1–8.
 - [16] Warjito, D. Adanta, Budiarmo, dan A. P. Prakoso, "The effect of bucketnumber on breastshot waterwheel performance," in *IOP Conference Series: Earth and Environmental Science*, Jan 2018, hal. 1–7.
 - [17] F. J. Sánchez-Jiménez dan J. A. González, "Watermills: The origin of the use of renewable hydraulic energy in Spain," *Ind. Archaeol. Rev.*, vol. 40, no. 1, hal. 2–10, 2018.
 - [18] I. Gunawan Widodo, A. Sunarso, H. Sihombing, dan D. Sulistiono, "Pengaruh Kedalaman Pencelupan Sudu Kincir Terhadap Unjuk Kerja Kincir Air," *J.Rekayasa Mesin*, vol. 13, no. 2, hal. 62–66, 2018.
 - [19] M. H. Nguyen, H. Jeong, dan C. Yang, "A study on flow fields and performance of water wheel turbine using experimental and numerical analyses," *Sci. China Technol. Sci.*, vol. 61, no. 3, hal. 464–474, 2018.
 - [20] E. Quaranta dan R. Revelli, "Hydraulic Behavior and Performance of Breastshot Water Wheels for Different Numbers of Blades," *J. Hydraul. Eng.*, vol. 143, no. 1, hal. 1–10, Jan 2017.
 - [21] D. Mugisidi, O. Heriyani, R. A. Luhung, dan M. R. D. Andrian, "Utilization of the dethridge wheel as a low head power generator and loss analysis," in *MATEC Web of Conferences*, 2018, hal. 1–6.
 - [22] Agato, Deendarlianto, Indarto, dan A. Sunarso, "Simulasi Numerik Aliran Fluida Pada Kincir Air Menggunakan Metode Sliding Mesh Interface," *J. Rekayasa Mesin*, vol. 15, no. 2, hal. 955–966, 2023.
 - [23] M. Castro-García, J. I. Rojas-Sola, dan E. De La Morena-de La Fuente, "Technical and functional analysis of Albolafia waterwheel (Cordoba, Spain): 3D modeling, computational-fluid dynamics simulation and finite-element analysis," *Energy Convers. Manag.*, vol. 92, hal. 207–214, 2015, doi: 10.1016/j.enconman.2014.12.047.
 - [24] S. D. Boedi, A. N. Mekel, dan A. Maidangkay, "Rancang Bangun Turbin Kinetik Sudu Berengsel Luar Sebagai Pembangkit Listrik Skala Pikohidro," *Otopro*, vol. 17, no. 2, hal. 69–75, 2022.
 - [25] N. Mandal dan G. Rajita, "An accurate technique of measurement of flow rate using rotameter as a primary sensor and an improved op-amp based network," *Flow Meas. Instrum.*, vol. 58, hal. 38–45, 2017.
 - [26] M. R. Ramdhani, R. Irwansyah, Budiarmo, Warjito, dan D. Adanta, "Investigation of the 16 blades pico scale breastshot waterwheel performance in actual river condition," *J. Adv. Res. Fluid Mech. Therm. Sci.*, vol. 75, no. 1, hal. 38–47, 2020.
 - [27] J. Štigler, "Overshot water wheel efficiency measurements for low heads and low flowrates," *EPJ Web Conf.*, vol. 269, hal. 01058, 2022.
 - [28] M. F. Basar, I. A. Zulkarnain, K. Sopian, dan N. A. Mohd Rais, "Investigations on the performance of bottle blade overshot water wheel in very low head resources for pico hydropower," *Energy Harvest. Syst.*, vol. 11, no. 1, hal. 2–10, 2024.
 - [29] Z. Nurfadilah, D. Mugisidi, A. Rahman, S. Pohan, dan O. Heriyani, "Pengaruh Kincir Tertutup Terhadap Efisiensi dan Rugi-rugi," *Rekayasa Energi Manufaktur J. |*, vol. 8, no. 1, hal. 2528–3723, 2023.
 - [30] E. Quaranta dan R. Revelli, "Output power and power losses estimation for an overshot water wheel," *Renew. Energy*, vol. 83, hal. 979–987, 2015.
 - [31] M. Darwis, "Analisis Pengaruh Pembukaan Katup Terhadap Kinerja Turbin Air," *J. P4I*, vol. 3, no. 4, hal. 365–376, 2023.
 - [32] Marinus S, Hiendro A, dan Yandri, "Studi Aplikatif Roda Gila (FLYWHEEL) Pada Pembangkit Listrik Tenaga Mikrohidro (PLTMH)," *J. Elektr. Eng. Energy Inf. Teknol.*, vol. 7, no. 1, hal. 1–9, 2019.
 - [33] A. Digidoyo, F. Rahmasari, A. Budi Djatmiko, E. Yuniaty, dan D. Saepul, "Rancang Bangun Alat Uji Momen Inersia Massa Suatu Elemen Mesin dalam Tiga Arah Sumbu," *J. Ilm. Rekayasa Dan Inov.*, vol. 4, no. 2, hal. 193–200, 2022.
 - [34] M. F. Basar, N. A. M. Rais, A. A. Rahman, W. A. Mustafa, K. Sopian, dan K. V. Wong, "Optimization of Reaction Typed Water Turbine in Very Low Head Water Resources for Pico Hydro," *J. Adv. Res. Fluid Mech. Therm. Sci.*, vol. 90, no. 1, hal. 23–39, 2022.
 - [35] D. Iswanda, R. Soenoko, W. Winarto, dan A. Sunarso, "Pengaruh Besar Sudut Butterfly Guide terhadap Unjuk Kerja Kincir Air," *J. Rekayasa Mesin*, vol. 12, no. 3, hal. 653–661, Des 2021, doi: 10.21776/ub.jrm.2021.012.03.15.
 - [36] I. Wayan, B. Saputra, dan A. I. Weking, "Rancang Bangun Pemodelan Pembangkit Listrik Tenaga Mikro Hidro (PLTMH) Menggunakan Kincir Overshot Wheel," *Teknol. Elektro*, vol. 16, no. 02, 2017.
 - [37] T. Harismandri, J. Teknik Mesin, F. Teknik Universitas Riau Kampus Binawidya Km, dan S. Baru Panam, "PENGUJIAN PRESTASI KINCIR AIR TIPE OVERSHOT DI IRIGASI

- [38] J. Štigler, “Overshot water wheel efficiency measurements for low heads and low flowrates,” EPJ Web Conf., vol. 269, hal. 01058, 2022.

Layanan Perpustakaan UHAMKA

Impact of angle cap and water-filled blade modification on the output of overshot waterwheels

 28/4/2025

 Fakultas Teknologi Industri dan Informatika

 Universitas Muhammadiyah Prof. Dr. Hamka

Document Details

Submission ID

trn:oid:::1:3239425875

Submission Date

May 5, 2025, 10:27 AM GMT+7

Download Date

May 5, 2025, 10:57 AM GMT+7

File Name

Impact_of_angle_cap_and_water-filled_blade.pdf

File Size

847.8 KB

7 Pages

6,368 Words

30,526 Characters

5% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

Filtered from the Report

- Bibliography

Exclusions

- 5 Excluded Matches

Match Groups

-  **27 Not Cited or Quoted 5%**
Matches with neither in-text citation nor quotation marks
-  **3 Missing Quotations 1%**
Matches that are still very similar to source material
-  **0 Missing Citation 0%**
Matches that have quotation marks, but no in-text citation
-  **0 Cited and Quoted 0%**
Matches with in-text citation present, but no quotation marks

Top Sources

- 4%  Internet sources
- 3%  Publications
- 1%  Submitted works (Student Papers)

Integrity Flags

0 Integrity Flags for Review

No suspicious text manipulations found.

Our system's algorithms look deeply at a document for any inconsistencies that would set it apart from a normal submission. If we notice something strange, we flag it for you to review.

A Flag is not necessarily an indicator of a problem. However, we'd recommend you focus your attention there for further review.

Match Groups

- 27 Not Cited or Quoted 5%**
Matches with neither in-text citation nor quotation marks
- 3 Missing Quotations 1%**
Matches that are still very similar to source material
- 0 Missing Citation 0%**
Matches that have quotation marks, but no in-text citation
- 0 Cited and Quoted 0%**
Matches with in-text citation present, but no quotation marks

Top Sources

- 4% Internet sources
- 3% Publications
- 1% Submitted works (Student Papers)

Top Sources

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	Internet	fdocuments.in	<1%
2	Internet	repository.uhamka.ac.id	<1%
3	Internet	www.mdpi.com	<1%
4	Publication	Michael C. Gratzner, Gregg R. Davidson, Andrew M. O'Reilly, James R. Rigby. "Grou...	<1%
5	Internet	vdoc.pub	<1%
6	Internet	jurnal.sttmicileungsi.ac.id	<1%
7	Internet	jurnal.umj.ac.id	<1%
8	Internet	semarakilmu.com.my	<1%
9	Internet	kinematika.ulm.ac.id	<1%
10	Internet	journal.universitasbumigora.ac.id	<1%

11	Internet	www.degruyter.com	<1%
12	Publication	John Bird. "Science for Engineering", Routledge, 2019	<1%
13	Internet	www.e3s-conferences.org	<1%
14	Publication	Chunxia Yang, Qian Li, Xueyuan Hu, Yuan Zheng, Jiawei Wu, Shengzhi Su, An Yu. "...	<1%
15	Publication	Michael Hanry, Steven Darmawan, Sobron Yamin Lubis. "Pengaruh Nozzle dan Pe...	<1%
16	Publication	Mohamed Saber, Gamal Abdelall, Riham Ezzeldin, Ahmed Farouk AbdelGawad, Re...	<1%
17	Publication	Muhammad Usman, Joe Mac Regenstein, Hafiz Ubaid Ur Rahman, Anum Ishaq et ...	<1%
18	Internet	repository.usd.ac.id	<1%
19	Publication	Teguh Riyanto, I. Istadi, Luqman Buchori, Didi D. Anggoro, Asep Bayu Dani Nandi...	<1%
20	Internet	eprints.polsri.ac.id	<1%

Processed dates: received on 2025-02-26, reviewed on 2025-03-27, accepted on 2025-04-23 and online availability on 2025-04-30

Impact of angle cap and water-filled blade modification on the output of overshot waterwheels

Rizki Afif Afandi, Dan Mugisidi*, Giri Parwatomoko, Oktarina Heriyani

Department of Mechanical Engineering, University of Muhammadiyah Prof. Dr. Hamka, Jakarta 13830, Indonesia

*Corresponding Author: dan.mugisidi@uhamka.ac.id

Abstract

The utilization of water resources as renewable energy through waterwheels presents an environmentally friendly alternative, however, its efficiency requires improvement through technological modification. This research investigates two design modifications: a 45° Angle Cap (AC) and a Water-Filled Angle Cap (WFAC), in comparison with a waterwheel without a Cap (WC). Experiments were conducted at discharges from 1 to 10 m³/h with a constant torque load of 0.05 N-m. The highest efficiency of 57.08% was achieved in the AC 45° configuration at 1 m³/h, generating 1.09 watts of power, while the WFAC 45° yielded the highest power output of 2.88 watts at 10 m³/h with an efficiency of 14.50%. Although increasing discharge generally led to higher power input, it was accompanied by a decrease in efficiency across all configurations. Among all three variations, WFAC 45° demonstrated superior performance at higher discharges, indicating its potential for enhancing the power and efficiency of overshot waterwheels.

Keywords:

Waterwheel, renewable energy, rotational kinetic energy, moment of inertia, efficiency.

1 Introduction

Sustainable utilization of natural resources is one of the central issues in the global effort to deal with climate change and environmental degradation [1], [2], including Indonesia. Indonesia is one of the developing countries that has abundant renewable natural resources and one of them is water [3]. Water as a renewable natural energy has great potential to be converted from kinetic energy into electrical energy [4]. Hydropower plants are designed to generate electricity on a large scale, while small-scale plants are known as Micro-hydro Power Plants (MHP) [5], [6], [7]. MHP utilizes the flow of rivers or other water sources to generate electricity in a sustainable manner to meet the needs of housing, agriculture, and community facilities [8], [9], [10].

The utilization of water as a renewable energy source requires a waterwheel that plays an important role in converting kinetic energy from water flow into other forms of energy and is usually converted into electrical energy through a generator that operates without reducing the volume of water [11], [12]. In this context, waterwheels were chosen because they are more environmentally friendly and cost-effective [13]. Waterwheels have 3 types: overshot, breast shot, and undershot waterwheels. [14]. In an overshot waterwheel, water flows from the top of the wheel and spins as it falls to a lower surface. In a breast shot waterwheel, water flows over the center of the waterwheel which is positioned parallel to the top [15]. Meanwhile, in an undershot waterwheel, the waterwheel is placed slightly above the water flow so that only the bottom part of the waterwheel enters the water. The difference between the three types of waterwheels lies

in the type of energy transferred to the waterwheel which affects the efficiency and the exact conditions of use of each waterwheel. [16], [17].

Various studies have been conducted on waterwheels, including the effect of adding angled caps, blade thickness on flat-bladed waterwheels, and the relationship between blade height and power and efficiency [18], [19]. The efficiency of waterwheels is influenced by a variety of factors, including aspects of the geometry of the wheel, such as diameter size, number of blades, and their curved shape, as well as operational factors such as water level (head), flow discharge, load torque, and water flow position [20], [21]. To achieve high efficiency, more in-depth research is needed related to these factors, with experimental methods under field conditions [22]. Previous research shows that the shape of the waterwheel blades is very important because a certain shape makes it easier for water to enter between the blades and is one of the causes of the wheel's rotation. In addition, the moment of inertia of the waterwheel is also an important factor that affects the efficiency and stability of the waterwheel [23]. Although research on waterwheels has been going on for a long time, until now no waterwheel has been equipped with a director to force water to enter between the blades, even though this has the potential to increase the power generated. Another attempt that has not yet been made is to introduce water into the waterwheel to increase its moment of inertia.

Therefore, this study aims to determine the performance of the power generated by the wheel and the efficiency of the wheel's performance by comparing a straight-blade water wheel with a water wheel that has a blade cover to direct water in, as well as a wheel that contains water in the blade.

2 Method

The waterwheel used in the study is an overshot waterwheel with 16 blades. There are 2 models of blade caps, namely closed water-filled and 45° angled caps to the outside as shown in Fig. 1. The closed water-filled blades aim to produce a moment of inertia and increase the kinetic energy of the wheel. The cap that forms a 45° angle on the blades serves to expand the area outside the blades so that the water flow is concentrated in the blade area to achieve maximum rotation.

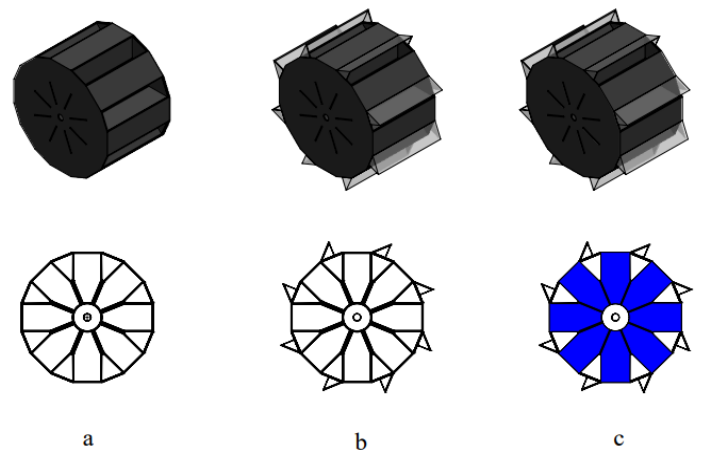


Fig. 1. Overshot waterwheel. a) Isometric and side view Without Cap (WC), b) isometric and side view Angle Cap (AC) 45°, and c) isometric and side view Water-Filled Angle Cap (WFAC) 45°

The test method applied in the overshot waterwheel research is the actual experimental method on a laboratory scale. The test was carried out in the Mechanical Engineering laboratory of University Prof. Dr Hamka Muhammadiyah. Tests were carried out using dependent variables and independent variables. The dependent variable consists of rotation, torque, waterwheel power, and waterwheel efficiency. While the independent variables are Without Cap (WC), Angle Cap (AC) 45°, and Water-Filled Angle Cap (WFAC) 45° shown in Fig. 1. The flowchart of the overshot waterwheel research can be seen in Fig. 2.

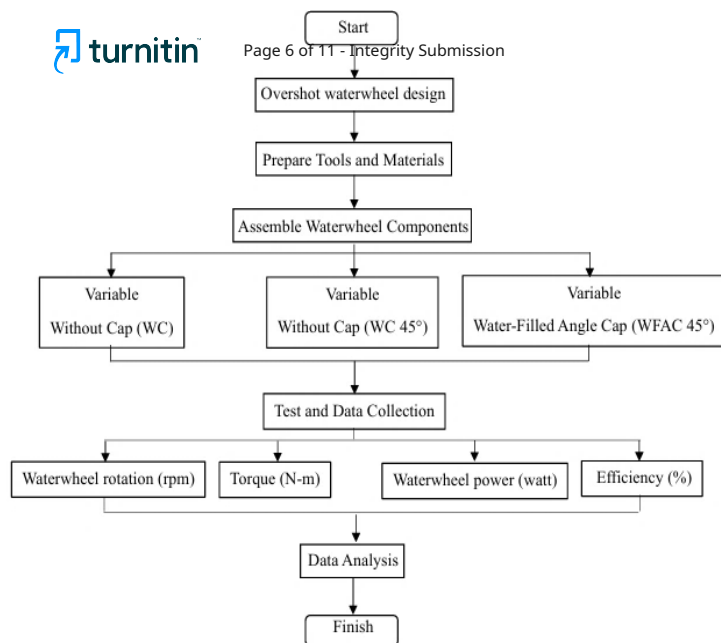


Fig. 2. Flowchart of overshoot waterwheel research systematic

Fig. 2 is a systematic way of conducting overshoot waterwheel research. This research consists of three interconnected stages. The first stage includes preparation of the design concept, equipment needed for research, and assembly of the waterwheel components. The second stage is a trial to ensure the research tool functions properly. The third stage is data collection through recording which is then followed by the data analysis process.

The design of the overshot waterwheel involved design, cutting, welding, and testing. The manufacture of the waterwheel housing uses melamine multiplex material, with the inside coated with resin and the outside coated with waterproof paint. The wheelhouse is 100 cm high, 100 cm long, and 37 cm wide. The lid is made of acrylic material with a 45° tilt angle. Meanwhile, the wheel is made of iron material with a thickness of 3 mm.

The wheel mounting frame plays a role in supporting the pillow block to support the wheel shaft, ensuring optimal wheel rotation. The waterwheel shaft is solid with a diameter of 25 mm, while the waterwheel has a diameter of 45 cm and a thickness of 30 cm. The geometry design of the overshot waterwheel in millimeters (mm) is shown in Fig. 3.

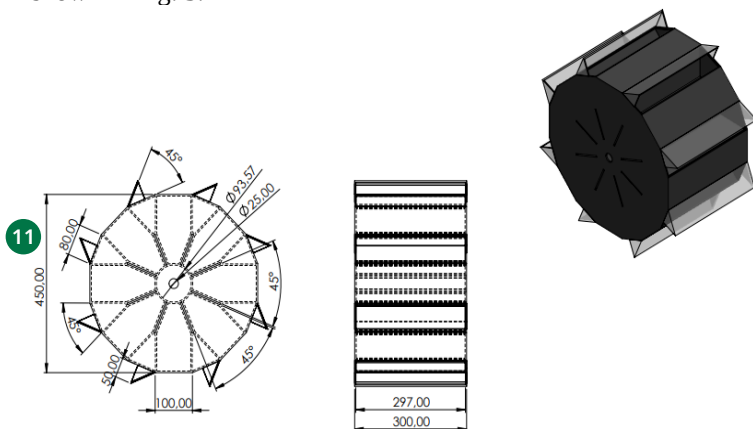


Fig. 3. Geometry of waterwheel

Measuring instruments used for the data collection process include, Torque meter functions to collect Torque data from the waterwheel. Data collection of waterwheel rotation using a Tachometer measuring instrument [24]. Water discharge settings using a Rotameter measuring instrument and water flow rate measured using a Flow velocity meter tool [25], according to the specifications listed in Table 1.

This study utilized one waterwheel to collect data on the independent variables. The four red-colored dots shown in the fig. 4

indicate the data collection locations required during the testing process.

Table 1. Specifications of waterwheel test measuring instrument

Measurement tool	Type	Capacity
Torque meter	Lutron TQ-8800	0 - 0.15 (N-m)
Tachometer	KW06-563	0 - 20.000 (rpm)
Rotameter	LZT-50S105/N	1 - 10 m ³ /h
Flow velocity meter	Flo watch FL-03	2 - 150 (km/h)

Data was collected using flow rates of 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, up to 10 m³/h, which were circulated using a pump. The independent variables tested included a 45° angle cap, no cap, and a 45° angle cap with water content. Data was taken more than once to ensure the test results remained consistent.

The installation scheme of the overshoot waterwheel test consists of 17 components, each of which plays a crucial role with different functions, starting from the water pump in charge of maintaining the continuity of water flow through the pipe from the waterwheel house, forwarded to the water trough according to the design shown in Fig. 4.

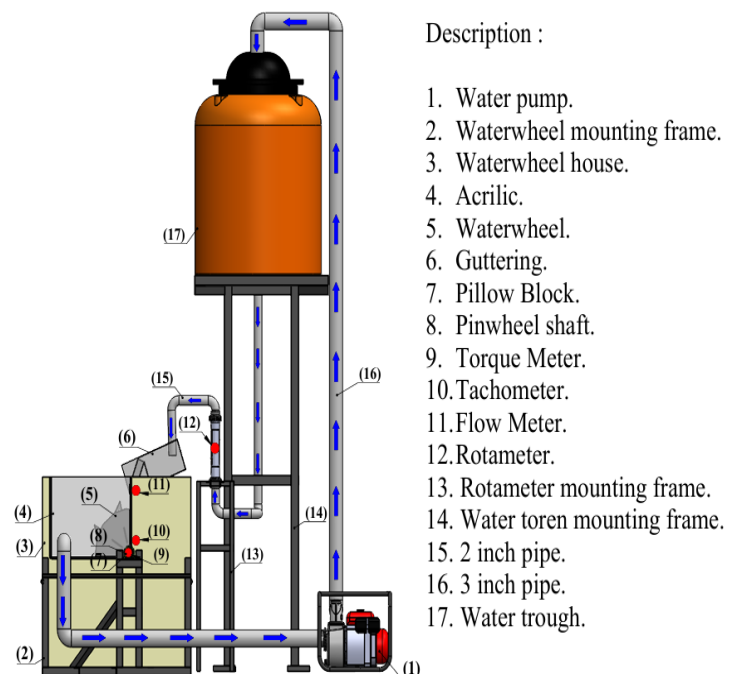


Fig. 4. Schematic design of overshoot waterwheel testing installation

The water trough, which acts as the main reservoir, is designed to facilitate the precise regulation of water discharge, which is done with the help of a rotameter gauge to control the flow of water into the gutter. The gutter acts as a guide, concentrating the water flow precisely on the 45° tilt angle of the blades, ensuring an even distribution of water across the surface of the blades. The blade's main function is to maximize the efficiency of the waterwheel rotation by adjusting its rotation rate to the volume and velocity of the incoming water flow, which ultimately determines the overall performance of the waterwheel. As a control and reference in this test, the detailed specifications of the waterwheel are presented in Table 2, providing a clear guide to the technical parameters tested.

Table 2. Waterwheel specifications

Specification	Parameter
Weight of Waterwheel WC	41 kg
Weight of Waterwheel AC 45°	42.5 kg
Weight of Waterwheel WFAC 45°	60 kg
Toque	0.05 N-m

14 The precision-designed components of the waterwheel are then assembled into a highly complex and interconnected circuit, where 3 each element contributes to the functionality of the entire system. The artificial waterways, whose continuity is supported by the use of pumps, serve to maintain a steady and controlled flow of water, which in turn allows for high-accuracy testing of the efficiency of the waterwheel. The overall result of the waterwheel assembly, which incorporates various aspects of technical design and construction, can be seen in Fig. 5.



Fig. 5. The assembled overshot waterwheel installation and data collection location. (a) water flow velocity data, (b) water discharge data, (c) waterwheel torque data, and (d) waterwheel rotation data

Experimental results were processed to determine the efficiency 7 of the waterwheel. Energy from water can be obtained through water flowing into the blades of the waterwheel. The power generated by the water (P_{in}) can be calculated using Eq. (1) [26].

$$P_{in} = \rho \cdot g \cdot h \cdot Q \quad (1)$$

Where P_{in} is water power (W), ρ is density of water (998.2 kg/m³), g is gravitational acceleration (m/s²), h is waterfall height (m), and Q is water discharge (m³/h).

1 Where the head is the height difference between the surface of the base of the waterwheel housing and the height of the water surface before entering the waterwheel blades [27]. The circumferential speed of the wheel commonly known as angular velocity (ω) is obtained from Eq. (2) [28]. Meanwhile, to calculate 6 the waterwheel power (P_{out}) using the Eq. (3) [29].

$$\omega = \frac{2 \cdot \pi \cdot n}{60} \quad (2)$$

$$P_{out} = T \cdot \omega \quad (3)$$

Where ω is angular velocity (rad/s), n is waterwheel rotation (rpm), and T is torque (N-m). Submission ID trn:oid::1:3239425875

The efficiency of the waterwheel (η) is the ratio between the power generated by the waterwheel and the water power, which can be calculated using Eq. (4) [30].

$$\eta = \frac{P_{out}}{P_{in}} \times 100\% \quad (4)$$

The rotation of a solid body with mass (m) moving translational (linear) with velocity (v) using Eq. (5) can be explained through kinetic energy according to Eq. (6) [31].

$$v = \omega \cdot r \quad (5)$$

$$Ek = \frac{1}{2} \cdot m \cdot v^2 \quad (6)$$

Where r is distance of the waterwheel to the shaft (m), Ek is kinetic energy (J), m is mass of the wheel (kg), and v is water flow velocity (m/s²).

It is assumed that the kinetic energy measured in a solid cylinder results in Rotational Kinetic Energy (Ek_{rot}) which is related to the moment of Inertia (I) and can be obtained through Eq. (7) [32].

$$Ek_{rot} = \frac{1}{2} \cdot I \cdot \omega^2 \quad (7)$$

Where is Ek_{rot} is rotational kinetic energy (J), and I is moment of inertia (kg.m²).

Moment of Inertia (I) is the property of an object that allows it to maintain its position in rotational motion [33]. A stationary object tends to maintain its position, so a moving object will try to maintain its rotational motion. Mathematically, the moment of inertia can be obtained from Eq. (8).

$$I = m \cdot r^2 \quad (8)$$

3 Results and discussion

After obtaining torque and rotation data for each discharge variation. Calculation of water power, waterwheel power, and overshot waterwheel efficiency using Eqs. (1), (3), and (4). The results of testing and data processing are presented in the form of tables and figures that show the relationship between these factors. The complete results of data processing can be seen in Table 3.

The rotation of the waterwheel is influenced by the water flow using Eq. (6) and the head of the waterwheel. At the discharge position of 1-5.5 m³/h, the head value was recorded at 0.7 m, while at the discharge of 6-8.5 m³/h, the head value increased by 0.02 m, and reached its peak at the discharge of 9 to 10 m³/h with a head value of 0.73 m. This increase in head is caused by the increase in water flow in the gutter of the waterwheel. The increase in head is caused by the increase in the flow of water flowing in the gutter of the waterwheel. The waterwheel without the corner cap experiences an obstacle, where the water flow cannot hit the entire blade optimally. As a result, the water flow that enters the blades is focused in the middle and goes straight down to the bottom of the wheel, so it cannot maximize the water flow and causes a small rotation.

On the other hand, the waterwheel with a 45° angle cap shows a larger rotation than the waterwheel without a cap, because the angle cap reduces the opening area of the waterwheel. This causes the flow of water into the blade of the waterwheel not to come out immediately, due to obstruction by the waterwheel cover, so that the water can be concentrated effectively towards the blade of the waterwheel.

Table 3. Data processing results of variable waterwheel WC, AC 45°, WFAC 45°

Q (m ³ /h)	n (rpm)			P _{in} (watt)			P _{out} (watt)			efficiency (%)		
	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°
1	7.41	19.62	8.95	1.91	1.91	1.91	0.41	1.09	0.51	21.70	57.08	26.55
1,5	11.96	25.66	18.31	2.86	2.86	2.86	0.66	1.43	1.07	23.21	50.09	37.53
2	16.22	30.02	19.91	3.82	3.82	3.82	0.89	1.70	1.21	23.30	44.50	31.69

Q (m ³ /h)	n (rpm)				P _{in} (watt)			P _{out} (watt)			efficiency (%)		
	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°	WC	AC 45°	WFAC 45°	WC
2,5	19.41	34.12	24.96	4.68	4.68	4.68	1.05	1.88	1.41	22.02	39.46	29.60	
3	21.62	37.33	28.46	5.72	5.72	5.72	1.22	2.01	1.64	21.37	35.07	28.64	
3,5	23.70	38.27	30.13	6.68	6.68	6.68	1.32	2.22	1.68	19.70	33.21	25.21	
4	25.06	40.50	32.29	7.63	7.63	7.63	1.41	2.26	1.94	18.45	29.64	25.38	
4,5	26.28	41.55	33.43	8.58	8.58	8.58	1.46	2.29	1.94	16.99	26.70	22.57	
5	28.12	42.34	34.90	9.54	9.54	9.54	1.55	2.35	2.01	16.26	24.64	21.07	
5,5	28.66	42.77	36.21	10.49	10.49	10.49	1.56	2.42	2.01	14.88	23.05	19.16	
6	29.75	43.38	37.39	11.77	11.77	11.77	1.66	2.36	2.23	14.11	20.07	18.96	
6,5	31.95	43.96	38.42	12.75	12.75	12.75	1.74	2.30	2.21	13.64	18.05	17.35	
7	33.11	44.13	39.06	13.73	13.73	13.73	1.80	2.43	2.32	13.13	17.72	16.88	
7,5	34.20	45.06	39.67	14.72	14.72	14.72	1.91	2.52	2.20	12.98	17.10	14.96	
8	36.04	45.86	40.58	15.70	15.70	15.70	1.95	2.67	2.35	12.42	17.03	14.98	
8,5	36.68	46.51	41.68	16.68	16.68	16.68	2.09	2.63	2.37	12.52	15.77	14.22	
9	38.99	46.87	42.59	17.90	17.90	17.90	2.14	2.60	2.51	11.94	14.53	14.03	
9,5	39.91	47.30	44.73	18.90	18.90	18.90	2.24	2.68	2.58	11.87	14.15	13.63	
10	41.47	48.56	47.47	19.89	19.89	19.89	2.29	2.85	2.88	11.50	14.32	14.50	

Meanwhile, the wheel equipped with a corner cap filled with water experiences a moment of inertia that causes inertia in the rotation of the wheel to be smaller when the discharge is in the range of 1 to 4 m³/h. However, the rotation began to increase at a discharge of 4 to 10 m³/h due to the work of the moment of inertia helping to increase the kinetic energy of the waterwheel rotation, whereas, at a discharge of 10 m³/hour, the rotation of the waterwheel experienced a significant increase compared to the waterwheel using a 45° angle cap without water content. The following figure shows the comparison of the processed data.

Fig. 6 shows the relationship between water discharge (m³/h) on the horizontal axis and wheel speed (rpm) on the vertical axis. In this figure, there are three turbine configurations, namely AC 45°, WC, and WFAC 45°, with each tested at two water discharge ranges: 1-4 m³/h and 4-10 m³/h.

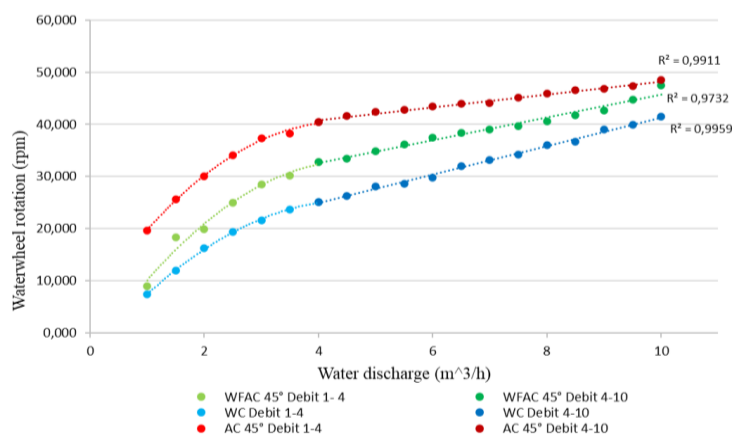


Fig. 6. Waterwheel rotation (rpm)

The AC 45° variable waterwheel represents a polynomial curve at small discharge (1-4 m³/h), where the rotation of the waterwheel increases gradually from 19.62 rpm to 40.50 rpm. The increase in rotation is due to the angle cap which reduces the opening area of the waterwheel so that the water does not fall directly to the bottom of the waterwheel house, resulting in a moment of inertia with the calculation of Eq. (9) of 2.152 kg/m² and generating rotational kinetic energy of 12.249 Joules using the calculation of Eq. (8). At large discharges (4-10 m³/h) show a more stable and linear increase, where the rotation of the waterwheel increases from 40.50 rpm to reach about 48.56 rpm. There is an increase in rotational kinetic energy of 23.386 Joules. The R² value is 0.9911, indicating that the 45° angle cap greatly influences the rotation of the waterwheel.

The WFAC 45° variable wheel represents a polynomial curve at small discharge, where the rotation of the wheel experiences inertia due to the water content of the wheel blades causing the rotation to slow down in contrast to the AC 45°. The rotation starts from about 8.95 rpm and increases to 32.29 rpm. In the increase in rotation, there is a moment of inertia of 3.087 kg/m² resulting in rotational kinetic

energy of 9.242 Joules, with a slower increase when compared to the AC 45° waterwheel. At large discharge, the rotation of the waterwheel increased linearly from 32.29 rpm to 47.47 rpm showing a stable relationship between water discharge and waterwheel rotation. The curve also has a high fit to the data, indicated by the R² value of 0.9732. In the no-water-fill condition, with the same water discharge of 9-10 m³/h, the rotation of the waterwheel recorded a continuous increase, which was 46.87 rpm, 47.30 rpm, and 48.56 rpm. A significant increase in the rotation of the WFAC 45° began to be seen at a discharge of 9-10 m³/hour, respectively 42.59 rpm, 44.73 rpm, and 47.47 rpm and produced rotational kinetic energy of 25.946 Joules. Where water filling produces an increase in rotational kinetic energy, it causes a significant increase in wheel rotation. If the discharge continues the possibility is greater than with AC 45° which increases continuously. This is because the rotational kinetic energy is directly proportional to the square of the rotation speed at large discharge, although the difference in rotation is still visible.

The WC variable wheel showed a polynomial curve configuration at small discharge, with the wheel rotation starting from about 7.41 rpm and increasing up to 25.06 rpm. The moment of inertia value of 2.076 kg/m² produced 3.653 Joules less rotational kinetic energy compared to AC 45° and WFAC 45°, but still had a very high R² value of 0.9959 indicating an excellent match with the data. As the discharge was increased, the wheel rotation was only able to increase from 25.06 rpm to 41.47 rpm resulting in rotational kinetic energy of 12.470 Joules less than AC 45° and WFAC 45°, following a similar linear pattern as the other configurations. Overall, this figure shows that an increase in water discharge is closely related to an increase in waterwheel rotation just as in previous studies [34]. The difference in efficiency varies between wheel configurations and water discharge ranges.

Fig. 7 shows the relationship between water discharge (m³/h) and waterwheel power (watt), indicating that the higher the water discharge, the more power the waterwheel produces. This graph consists of several sets of data, each representing different conditions, namely AC 45°, WC, and WFAC 45° at discharge ranges of 1-4 m³/h and 4-10 m³/h, respectively. The difference between the small discharge range (1-4) and the large discharge range (4-10) can be seen from the different shapes of the curves used: polynomial curves for discharge 1-4 m³/h and linear curves for discharge 4-10 m³/h.

In the variable AC 45° waterwheel, the waterwheel configuration is at a 45° angle. In the discharge range of 1-4 m³/h, the curve shows a polynomial pattern, where the waterwheel power increases sharply from about 1.09 to almost 2.26 watts. In the discharge range of 4-10 m³/hr, the pattern changes to linear, with the power continuing to increase steadily until it reaches 2.85 watts at a discharge of 10 m³/hr. The R² = 0.8603 value for this linear curve indicates that the model does a good job of explaining the relationship between water discharge and waterwheel power.

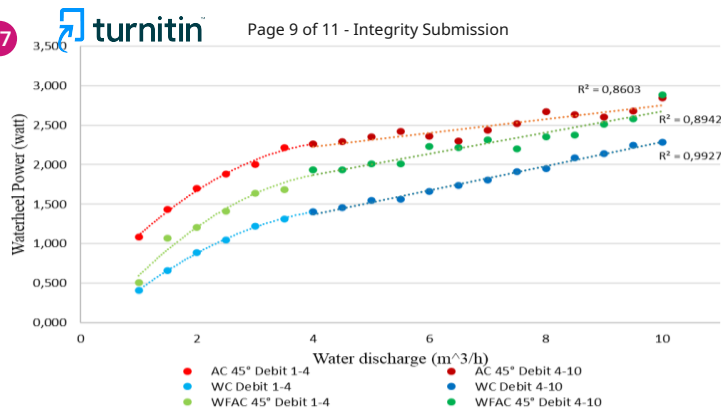


Fig. 7. Waterwheel power (Watt)

The WFAC 45° variable wheel, where at a discharge of 1-4 m³/h, the curve shows polynomial properties with the resulting wheel power relatively smaller than that of the AC 45°, which ranges from 0.51 watts to 1.94 watts. This phenomenon can be explained by the process of inertia caused by water, which makes the wheel heavier to rotate. So that the power generated is smaller than that of AC 45°. When the discharge increases from 4 to 10 m³/hour, the power of the waterwheel increases linearly until it reaches about 2.88 watts greater than AC 45°. This occurs because the increase in water discharge causes an increase in the moment of inertia, which in turn generates greater rotational kinetic energy, allowing the waterwheel power to reach its maximum point. The value of $R^2 = 0.8942$ for this linear curve indicates that the relationship between water discharge and waterwheel power is stronger than AC 45° at large discharge.

At the discharge range of 1-4 m³/h, the polynomial curve shows the generated waterwheel power starts from about 0.41 watts and increases up to 1.41 watts. In the discharge range of 4-10 m³/h, the waterwheel power increased linearly from 1.41 watts to 2.29 watts with a very strong relationship $R^2 = 0.9927$.

Fig. 8 illustrates the maximum and minimum waterwheel performance conditions observed in the operating system. The highest efficiency, recorded at variable AC 45°, occurred at a discharge of 1 m³/h, with an efficiency of 57.08%. In contrast, the lowest efficiency occurred at a discharge of 10 m³/h, with an efficiency of 14.32%. At variable WFAC 45°, the highest efficiency was achieved at a discharge of 1½ m³/h, which resulted in an efficiency of 37.53%.

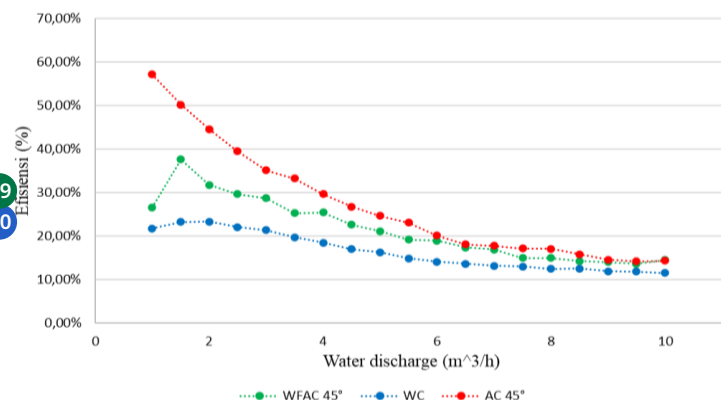


Fig. 8. Waterwheel efficiency (%)

An important phenomenon occurred at a discharge of 1 m³/h, where the efficiency initially decreased but then increased rapidly at a discharge of 1½ m³/h. This phenomenon can be attributed to the rotational inertia at a discharge of 1 m³/h, which causes the rotation of the waterwheel to rotate slowly. However, as the discharge increased, the water mass inside the waterwheel generated a moment of inertia similar to that observed in a previous study [35], which led to an increase in efficiency. The lowest efficiency at variable WFAC 45° was recorded at a discharge of 9½ m³/h, with a value of 13.63%. In addition, at a discharge of 2 m³/h, the maximum efficiency in the WC variable reached 23.30%, while the minimum efficiency at a

discharge of 10 m³/h was 11.50%. Next, the efficiencies of the WC, AC 45°, and WFAC 45° compared to previous studies as shown in Table 4, in addition to the results of previous studies.

Table 4. Comparison of waterwheel performance efficiency with previous studies

Variable	overshot water wheel	Efficiency	Reference
Waterwheel WC	diameter 0.45 m	23.30%	
Waterwheel AC 45°	diameter 0.45 m	57.08%	
Waterwheel WFAC 45°	diameter 0.45 m	37.53%	
Waterwheel nozzle angle 30°	diameter 0.50 m	25.05%	[36]
Waterwheel using square penstock	diameter 0.60 m	42.00%	[37]
Waterwheel bucket configuration -20	diameter 0.90 m	45.00%	[38]

Based on Table 4, the efficiency of an overshot waterwheel is influenced by the blade design and the water flow system. The uncovered waterwheel (WC) was only able to achieve an efficiency of 23.30%. However, the use of a blade cover with a 45° angle (AC 45°) increased the efficiency to 57.08%. When water was introduced into the closed angle (WFAC 45°), the efficiency decreased to 37.53%, possibly due to water content in the closed blade. The use of a nozzle with a 30° angle resulted in an efficiency of 25.05%, which is still lower than the (WFAC 45°) configuration. The square-shaped penstock with a diameter of 0.60 m produced an efficiency of 42.00%, while the 0.90 m diameter bucket configuration showed an increase in efficiency to 45.00%, but still lower than the 0.45 m diameter 45° AC closed blade design. Overall, the closed blade design proved to be the most effective in improving efficiency compared to simply increasing the diameter.

4 Conclusion

The utilization of water resources as renewable energy through waterwheels presents an environmentally friendly alternative, however, its efficiency requires improvement through technological modification. This research investigates two design modifications: a 45° angle cap (AC) and a water-filled angle cap (WFAC), in comparison with a waterwheel without a cap (WC). Experiments were conducted at discharges from 1 to 10 m³/h with a constant torque load of 0.05 N-m. The highest efficiency of 57.08% was achieved in the AC 45° configuration at 1 m³/h, generating 1.09 watts of power, while the WFAC 45° yielded the highest power output of 2.88 watts at 10 m³/h with an efficiency of 14.50%. Although increasing discharge generally led to higher power input, it was accompanied by a decrease in efficiency across all configurations. Among all three variations, WFAC 45° demonstrated superior performance at higher discharges, indicating its potential for enhancing the power and efficiency of overshot waterwheels.

Acknowledgment

The authors express their sincere gratitude to the Renewable Energy Research Team, Faculty of Industrial Technology and Informatics, Universitas Muhammadiyah Prof. Dr. Hamka, for the financial support provided for this research.

References

- [1] R. A. Febriansyar, T. Riyanto, dan I. Istadi, "Analysis of CaCO₃ Impregnation on HY Zeolite Surface Area, Pore Size, and Activity in the Catalytic Cracking of Palm Oil to Biofuels," *Teknik*, vol. 43, no. 1, hal. 78–86, 2022, doi: 10.14710/teknik.v43i1.44579 Copyright.
- [2] T. C. Lee, M. K. Anser, A. A. Nassani, M. Haffar, K. Zaman, dan M. M. Q. Abro, "Managing natural resources through sustainable environmental actions: A cross-sectional study of 138 countries," *Sustain.*, vol. 13, no. 22, hal. 2–19, 2021.
- [3] R. D. Syahrial, R. Soenoko, T. D. Widodo, dan A. Sunarso, "Pengaruh Tinggi Celah Aliran Pada Sluice Gate Terhadap Kinerja Kincir Air Jenis Sudu Melengkung," *J. Rekayasa Mesin*, vol. 14, no. 1, hal. 97–103, 2023.
- [4] D. Mugisidi, I. N. Fauzi, O. Heriyani, Y. Djeli, E. Aidhilhan,

- [5] Y. D. Herlambang, G. Suwoto, B. M. Hermawan, F. G. Sumarno, P. Negeri, dan P. N. Semarang, "Micro Hydro Power Plant (MHP) performance using breast-shot waterwheel with different electrical load to improve efficiency," Disseminating Inf. Res. Mech. Eng. Polimesin, vol. 22, no. 3, hal. 278–283, 2024.
- [6] L. N. Rahayu dan J. Windarta, "Tinjauan Potensi dan Kebijakan Pengembangan PLTA dan PLTMH di Indonesia," J. Energi Baru dan Terbarukan, vol. 3, no. 2, hal. 88–98, 2022.
- [7] A. Rahman Hafiz, A. Nuramal, dan N. Iman Supardi, "Analisi Produksi Listrik di Pembangkit Listrik Tenaga Minihidro (PLTM) Analysis of Electricity Production in Mini Hydro Power Plants (PLTM)," Rekayasa Mek., vol. 6, no. 1, hal. 15–21, 2022.
- [8] Y. Dewantoro Herlambang, G. Suwoto, B. Mei Hermawan, dan F. Gatot Sumarno, "The effect of variations in electric load on the performance of a 3 kW Micro Hydro Power Plant using an undershot waterwheel," Disseminating Inf. Res. Mech. Eng. Polimesin, vol. 21, no. 2, hal. 214–218, 2023.
- [9] R. Dyaa Sudiro, L. Halim, dan B. Made Arthaya, "Implementasi Dan Pengujian Prototipe Turbin Jenis Propeller Untuk Pembangkit Listrik Tenaga Mikrohidro," J. Rekayasa Mesin, vol. 15, no. 2, hal. 919–936, 2024.
- [10] E. Quaranta dan R. Revelli, "Gravity water wheels as a micro hydropower energy source: A review based on historic data, design methods, efficiencies and modern optimizations," Renew. Sustain. Energy Rev., vol. 97, hal. 414–427, 2018.
- [11] M. H. Kurniawan, A. Eksperimental, P. Performa..., dan K. K. Ayuningtiyas, "Analisis Eksperimental Pengaruh Performa Aliran Natural (Tanpa Pengarah) dan Penggunaan Nozzle Pada Kincir Air Jenis Breastshot," Indones. J. Eng. Technol., vol. 5, no. 1, hal. 2623–2464, 2022.
- [12] K.-L. Weng, F.-C. C. Chen, dan Y.-H. Lee, "Application Of Water Energy System To Balance Energy And Environment In The Whole World," IEEE Eurasia Conf. IOT,Communication Eng., hal. 21–23, 2019.
- [13] E. Quaranta dan R. Revelli, "Performance Optimization of Overshot Water Wheels at High Rotational Speeds for Hydropower Applications," J. Hydraul. Eng., vol. 146, no. 9, hal. 1–5, 2020.
- [14] A. Agato, A. sunarso Sunarso, N. Narsih, D. S. Domi, dan D. Iswanda, "Optimasi Unjuk Kerja Kincir Air Undershot," J. Rekayasa Mesin, vol. 14, no. 1, hal. 251–260, 2023.
- [15] H. Putra Prabawa, D. Mugisidi, M. Yusuf D, dan O. Heriyani, "Pengaruh Variasi Ukuran Diameter Nozzle Terhadap Daya Dan Efisiensi Kincir Air Sudu Datar," in Jurnal UMJ, 2016, hal. 1–8.
- [16] Warjito, D. Adanta, Budiarmo, dan A. P. Prakoso, "The effect of bucketnumber on breastshot waterwheel performance," in IOP Conference Series: Earth and Environmental Science, Jan 2018, hal. 1–7.
- [17] F. J. Sánchez-Jiménez dan J. A. González, "Watermills: The origin of the use of renewable hydraulic energy in Spain," Ind. Archaeol. Rev., vol. 40, no. 1, hal. 2–10, 2018.
- [18] I. Gunawan Widodo, A. Sunarso, H. Sihombing, dan D. Sulistiono, "Pengaruh Kedalaman Pencelupan Sudu Kincir Terhadap Unjuk Kerja Kincir Air," J.Rekayasa Mesin, vol. 13, no. 2, hal. 62–66, 2018.
- [19] M. H. Nguyen, H. Jeong, dan C. Yang, "A study on flow fields and performance of water wheel turbine using experimental and numerical analyses," Sci. China Technol. Sci., vol. 61, no. 3, hal. 464–474, 2018.
- [20] E. Quaranta dan R. Revelli, "Hydraulic Behavior and Performance of Breastshot Water Wheels for Different Numbers of Blades," J. Hydraul. Eng., vol. 143, no. 1, hal. 1–10, Jan 2017.
- [21] D. Mugisidi, O. Heriyani, R. A. Luhung, dan M. R. D. Andrian, "Utilization of the dethridge wheel as a low head power generator and loss analysis," in MATEC Web of Conferences, 2018, hal. 1–6.
- [22] Agato, Deendarlianto, Indarto, dan A. Sunarso, "Simulasi Numerik Aliran Fluida Pada Kincir Air Menggunakan Metode Sliding Mesh Interface," J. Rekayasa Mesin, vol. 15, no. 2, hal. 955–966, 2023.
- [23] M. Castro-García, J. I. Rojas-Sola, dan E. De La Morena-de La Fuente, "Technical and functional analysis of Albolafia waterwheel (Cordoba, Spain): 3D modeling, computational-fluid dynamics simulation and finite-element analysis," Energy Convers. Manag., vol. 92, hal. 207–214, 2015, doi: 10.1016/j.enconman.2014.12.047.
- [24] S. D. Boedi, A. N. Mekel, dan A. Maidangkay, "Rancang Bangun Turbin Kinetik Sudu Berengsel Luar Sebagai Pembangkit Listrik Skala Pikohidro," Otopro, vol. 17, no. 2, hal. 69–75, 2022.
- [25] N. Mandal dan G. Rajita, "An accurate technique of measurement of flow rate using rotameter as a primary sensor and an improved op-amp based network," Flow Meas. Instrum., vol. 58, hal. 38–45, 2017.
- [26] M. R. Ramdhani, R. Irwansyah, Budiarmo, Warjito, dan D. Adanta, "Investigation of the 16 blades pico scale breastshot waterwheel performance in actual river condition," J. Adv. Res. Fluid Mech. Therm. Sci., vol. 75, no. 1, hal. 38–47, 2020.
- [27] J. Štigler, "Overshot water wheel efficiency measurements for low heads and low flowrates," EPJ Web Conf., vol. 269, hal. 01058, 2022.
- [28] M. F. Basar, I. A. Zulkarnain, K. Sopian, dan N. A. Mohd Rais, "Investigations on the performance of bottle blade overshot water wheel in very low head resources for pico hydropower," Energy Harvest. Syst., vol. 11, no. 1, hal. 2–10, 2024.
- [29] Z. Nurfadilah, D. Mugisidi, A. Rahman, S. Pohan, dan O. Heriyani, "Pengaruh Kincir Tertutup Terhadap Efisiensi dan Rugi-rugi," Rekayasa Energi Manufaktur J. |, vol. 8, no. 1, hal. 2528–3723, 2023.
- [30] E. Quaranta dan R. Revelli, "Output power and power losses estimation for an overshot water wheel," Renew. Energy, vol. 83, hal. 979–987, 2015.
- [31] M. Darwis, "Analisis Pengaruh Pembukaan Katup Terhadap Kinerja Turbin Air," J. P4I, vol. 3, no. 4, hal. 365–376, 2023.
- [32] Marinus S, Hiendro A, dan Yandri, "Studi Aplikatif Roda Gila (FLYWHEEL) Pada Pembangkit Listrik Tenaga Mikrohidro (PLTMH)," J. Elektr. Eng. Energy Inf. Teknol., vol. 7, no. 1, hal. 1–9, 2019.
- [33] A. Digooyo, F. Rahmasari, A. Budi Djamiko, E. Yuniaty, dan D. Saepul Anwar, "Rancang Bangun Alat Uji Momen Inersia Massa Suatu Elemen Mesin dalam Tiga Arah Sumbu," J. Ilm. Rekayasa Dan Inov., vol. 4, no. 2, hal. 193–200, 2022.
- [34] M. F. Basar, N. A. M. Rais, A. A. Rahman, W. A. Mustafa, K. Sopian, dan K. V. Wong, "Optimization of Reaction Typed Water Turbine in Very Low Head Water Resources for Pico Hydro," J. Adv. Res. Fluid Mech. Therm. Sci., vol. 90, no. 1, hal. 23–39, 2022.
- [35] D. Iswanda, R. Soenoko, W. Winarto, dan A. Sunarso, "Pengaruh Besar Sudut Butterfly Guide terhadap Unjuk Kerja Kincir Air," J. Rekayasa Mesin, vol. 12, no. 3, hal. 653–661, Des 2021, doi: 10.21776/ub.jrm.2021.012.03.15.
- [36] I. Wayan, B. Saputra, dan A. I. Weking, "Rancang Bangun Pemodelan Pembangkit Listrik Tenaga Mikro Hidro (PLTMH) Menggunakan Kincir Overshot Wheel," Teknol. Elektro, vol. 16, no. 02, 2017.
- [37] T. Harismandri, J. Teknik Mesin, F. Teknik Universitas Riau Kampus Binawidya Km, dan S. Baru Panam, "PENGUJIAN PRESTASI KINCIR AIR TIPE OVERSHOT DI IRIGASI

- [38] J. Štigler, "Overshot water wheel efficiency measurements for low heads and low flowrates," EPJ Web Conf., vol. 269, hal. 01058, 2022.